

Lenovo ThinkSystem SR650a V4 Server Product Guide

The Lenovo ThinkSystem SR650a V4 is an ideal 2-socket 2U rack server for customers want to maximize GPU compute power while still retaining the traditional 2U rack form factor. With two Intel Xeon 6700-series or 6500-series processors, plus support for four double-wide GPUs including the NVIDIA H100 NVL 94GB, the SR650a V4 is designed for high density and scale-out workloads.

The SR650a V4 is designed to handle a wide range of workloads, such as AI Lifecycle, VDI/Virtualization, Content Delivery, and Text/Media Analysis.



Figure 1. Lenovo ThinkSystem SR650a V4

Did you know?

The SR650a V4 server supports four double-wide GPUs at the front of the server, including the NVIDIA H100 NVL GPUs. The configuration of the slots means that two GPUs can be connected together using high-speed NVLink connections. Such connectivity is ideal for demanding workloads such as AI training and inference.

Key features

Combining performance and flexibility, the SR650a V4 server is a great choice for enterprises of all sizes. The server offers a broad selection of drive and slot configurations and offers numerous high performance features. Outstanding reliability, availability, and serviceability (RAS) and high-efficiency design can improve your business environment and can help save operational costs.

Scalability and performance

The ThinkSystem SR650a V4 offers numerous features to boost performance, improve scalability and reduce costs:

- Supports one or two Intel Xeon 6700-series or 6500-series processors with Performance-cores (P-cores)
 - Up to 86 cores and 172 threads
 - Core speeds of up to 4 GHz
 - TDP ratings of up to 350 W
- Support for DDR5 memory DIMMs to maximize the performance of the memory subsystem:
 - Up to 32 DDR5 memory DIMMs, 16 DIMMs per processor
 - 8 memory channels per processor (2 DIMMs per channel)
 - Supports 1 DIMM per channel operating at 6400 MHz
 - Supports 2 DIMMs per channel operating at 5200 MHz
 - Using 256GB 3D RDIMMs, the server supports up to 8TB of system memory
- Support for MRDIMMs for increased memory bandwidth with memory bus speeds of up to 8000 MHz.
- Supports up to 4x double-wide GPUs or 8x single-wide GPUs, at the front of the server, for substantial processing power in a 2U system.
- Supports up to 8x 2.5-inch SAS/SATA, NVMe or AnyBay hot-swap drive bays or 8x E3.S 1T NVMe hot-swap drives for local storage.
- Supports 8x NVMe drives without oversubscription of PCIe lanes (1:1 connectivity). The use of NVMe drives maximizes drive I/O performance, in terms of throughput and latency.
- Supports high-speed RAID controllers providing 12 Gb SAS connectivity to the drive backplanes. A variety of PCIe 3.0 and PCIe 4.0 RAID adapters are available.
- Supports M.2 drives for convenient operating system boot functions or data storage. M.2 drives can be internally mounted or can be mounted at the front or rear of the server as hot-swap drives. Optional RAID-0 or RAID-1.
- Up to 8x PCIe slots (front accessible) for GPUs and 6x PCIe slots (rear accessible) for other PCIe adapters, plus two slots dedicated to OCP 3.0 adapters. Some configurations also support an additional internal bay for a cabled RAID adapter or HBA.
- The server has up to two dedicated industry-standard OCP 3.0 slots supporting a variety of Ethernet network adapters. A simple-swap mechanism with a thumbscrew and pull-tab enables tool-less installation and removal of the adapter. The adapter supports shared BMC network sideband connectivity to enable out-of-band systems management.
- The server offers PCI Express 5.0 I/O expansion capabilities that doubles the theoretical maximum bandwidth of PCIe 4.0 (32GT/s in each direction for PCIe Gen 5, compared to 16 GT/s with PCIe Gen 4 and 8 GT/s with PCIe Gen 3). A PCIe 5.0 x16 slot provides 128 GB/s bandwidth, enough to support a dual-port 200GbE network connection or a single-port 400GbE connection.

Availability and serviceability

The SR650a V4 provides many features to simplify serviceability and increase system uptime:

- Designed to run 24 hours a day, 7 days a week
- The server offers Single Device Data Correction (SDDC, also known as Chipkill), Adaptive Double-Device Data Correction (ADDDC, also known as Redundant Bit Steering or RBS), and memory mirroring for redundancy in the event of a non-correctable memory failure.

- The server offers hot-swap drives, supporting RAID redundancy for data protection and greater system uptime.
- Available M.2 boot adapters support RAID-1 (using onboard hardware RAID or using Intel VROC) which can enable two M.2 drives to be configured as a redundant pair.
- The server has up to two hot-swap redundant power supplies and up to six hot-swap redundant fans to provide availability for business-critical applications.
- The light path diagnostics feature uses LEDs to lead the technician to failed (or failing) components, which simplifies servicing, speeds up problem resolution, and helps improve system availability.
- Solid-state drives (SSDs) offer more reliability and performance than traditional mechanical HDDs for greater uptime.
- Proactive Platform Alerts (including PFA and SMART alerts): Processors, voltage regulators, memory, internal storage (SAS/SATA HDDs and SSDs, NVMe SSDs, M.2 storage, flash storage adapters), fans, power supplies, RAID controllers, server ambient and subcomponent temperatures. Alerts can be surfaced through the XClarity Controller to managers such as Lenovo XClarity Administrator, VMware vCenter, and Microsoft System Center. These proactive alerts let you take appropriate actions in advance of possible failure, thereby increasing server uptime and application availability.
- The built-in XClarity Controller continuously monitors system parameters, triggers alerts, and performs recovery actions in case of failures to minimize downtime.
- Built-in diagnostics in UEFI, using Lenovo XClarity Provisioning Manager, speed up troubleshooting tasks to reduce service time.
- Lenovo XClarity Provisioning Manager supports diagnostics and can save service data to a USB key drive or remote CIFS share folder for troubleshooting and reduce service time.
- Auto restart in the event of a momentary loss of AC power (based on power policy setting in the XClarity Controller service processor)
- Offers a diagnostics port on the front of the server to allow you to attach an external diagnostics handset for enhanced systems management capabilities.
- Support for the XClarity Administrator Mobile app running on a supported smartphone or tablet and connected to the server through the service-enabled USB port, enables additional local systems management functions.
- Three-year or one-year customer-replaceable unit and onsite limited warranty (varies by geography), 9 x 5 next business day. Optional service upgrades are available.

Manageability and security

Systems management features simplify local and remote management of the SR650a V4:

- The server includes XClarity Controller 3 (XCC3) to monitor server availability. Optional upgrade to XCC3 Premier to provide remote control (keyboard video mouse) functions, support for the mounting of remote media files (ISO and IMG image files), boot capture and power capping. XCC3 Premier also offers additional features such as Neighbor Groups, System Guard, a CNSA-compliant security mode, a FIPS 140-3-compliant mode, and enhanced NIST 800-193 support.
- Dedicated Ethernet port at the rear of the server for remote management (BMC management). Optional support for a second dedicated BMC management port, installed in the OCP adapter bay.
- Lenovo XClarity Administrator offers comprehensive hardware management tools that help to increase uptime, reduce costs and improve productivity through advanced server management capabilities.
- UEFI-based Lenovo XClarity Provisioning Manager, accessible from F1 during boot, provides system inventory information, graphical UEFI Setup, platform update function, RAID Setup wizard, operating system installation function, and diagnostic functions.
- Support for Lenovo XClarity Energy Manager which captures real-time power and temperature data from the server and provides automated controls to lower energy costs.
- An integrated industry-standard Unified Extensible Firmware Interface (UEFI) enables improved setup, configuration, and updates, and simplifies error handling.

- Support for industry standard management protocols, IPMI 2.0, SNMP 3.0, Redfish REST API, serial console via IPMI
- Enhanced security for storage connectivity with Fibre Channel adapters such as the Emulex SecureHBA, which provides autonomous in-flight encryption with integrated post-quantum cryptography (PQC) algorithms and CNSA 1.0 and 2.0 compliance.
- An integrated hardware Trusted Platform Module (TPM) supporting TPM 2.0 enables advanced cryptographic functionality, such as digital signatures and remote attestation.
- Administrator and power-on passwords help protect from unauthorized access to the server.
- Supports Secure Boot to ensure only a digitally signed operating system can be used. Supported with HDDs and SSDs, as well as M.2 drives.
- Industry-standard Advanced Encryption Standard (AES) NI support for faster, stronger encryption.
- Intel Execute Disable Bit functionality can prevent certain classes of malicious buffer overflow attacks when combined with a supported operating system.
- Intel Trusted Execution Technology provides enhanced security through hardware-based resistance to malicious software attacks, allowing an application to run in its own isolated space, protected from all other software running on a system.
- Support for an optional chassis intrusion switch for additional physical security.

Energy efficiency

The SR650a V4 offers the following energy-efficiency features to save energy, reduce operational costs, and increase energy availability:

- The server supports advanced Lenovo Neptune Core direct-water cooling (DWC) capabilities, where heat from key components is removed from the rack and the data center using an open loop and coolant distribution units, resulting in lower energy costs:
 - Processor Neptune Core Module uses liquid cooling to remove heat from the processors
- Energy-efficient system board components help lower operational costs.
- High-efficiency power supplies with 80 PLUS Titanium certifications
- Solid-state drives (SSDs) consume as much as 80% less power than traditional spinning 2.5-inch HDDs.
- Support for Lenovo XClarity Energy Manager provides advanced data center power notification, analysis, and policy-based management to help achieve lower heat output and reduced cooling needs.
- The server uses hexagonal ventilation holes, which can be grouped more densely than round holes, providing more efficient airflow through the system and thus keeping your system cooler.

Components and connectors

The following figure shows the front of the SR650a V4.

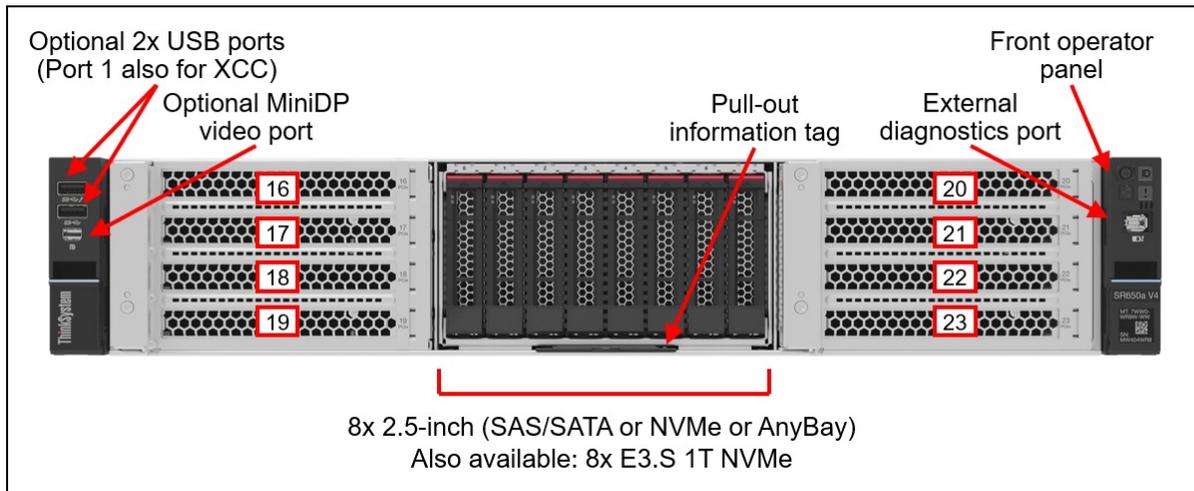


Figure 2. Front view of the ThinkSystem SR650a V4 with 2.5-inch drive bays

For details on the front ports, including the optional front VGA port and optional external diagnostic port, see the [Local management](#) section.

The following figure shows the front configurations of the SR650a V4. The server supports either 8x 2.5-inch hot-swap drives or up to 8x E3.S 1T hot-swap drive bays.

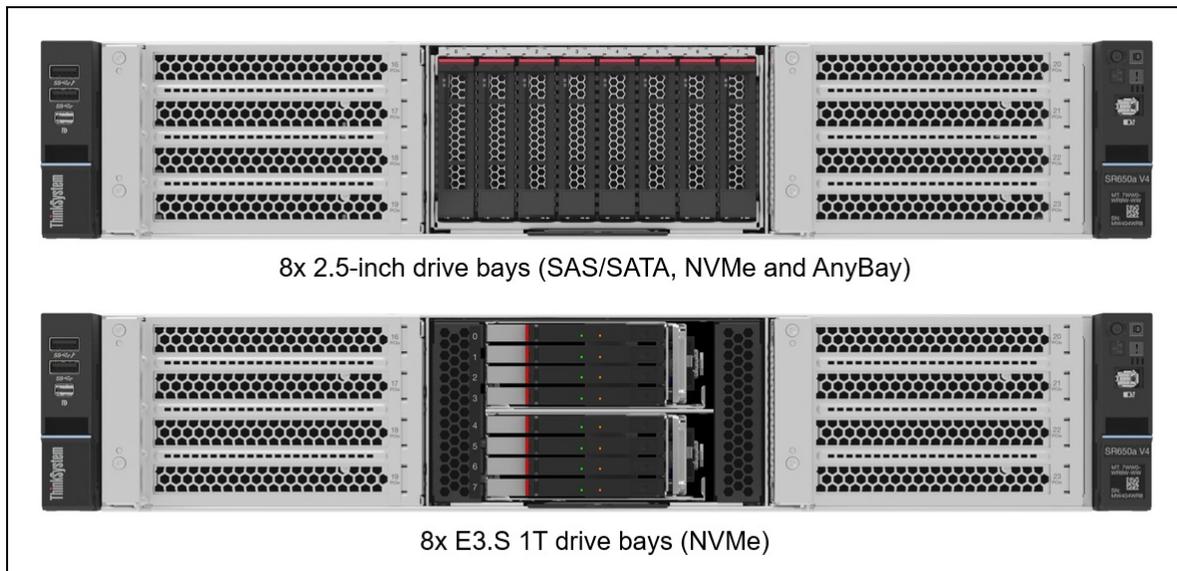


Figure 3. Front view configurations of the ThinkSystem SR650a V4

The following figure shows the components visible from the rear of the server.

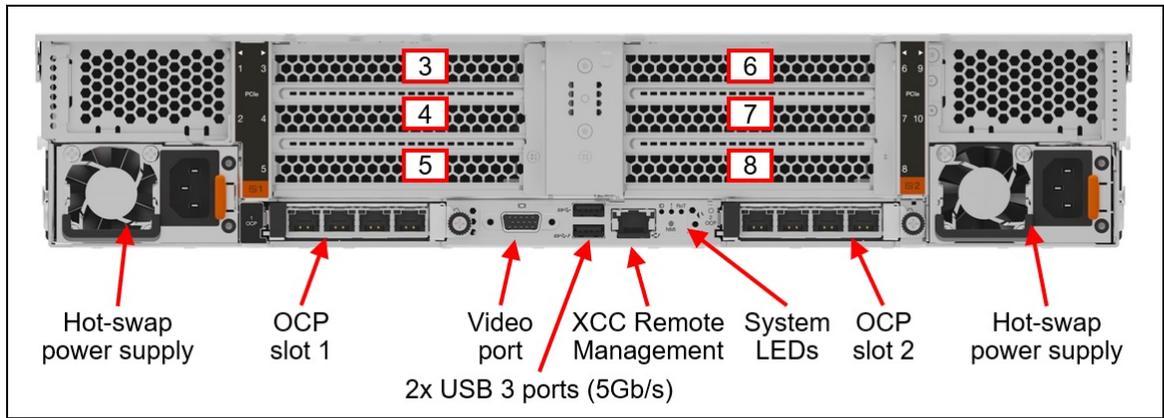


Figure 4. Rear view of the ThinkSystem SR650a V4 (configuration with ten PCIe slots)

The following figure shows the rear of the server when configured with Lenovo Neptune open-loop cooling. The inlet and outlet water hoses are routed through slot 8.

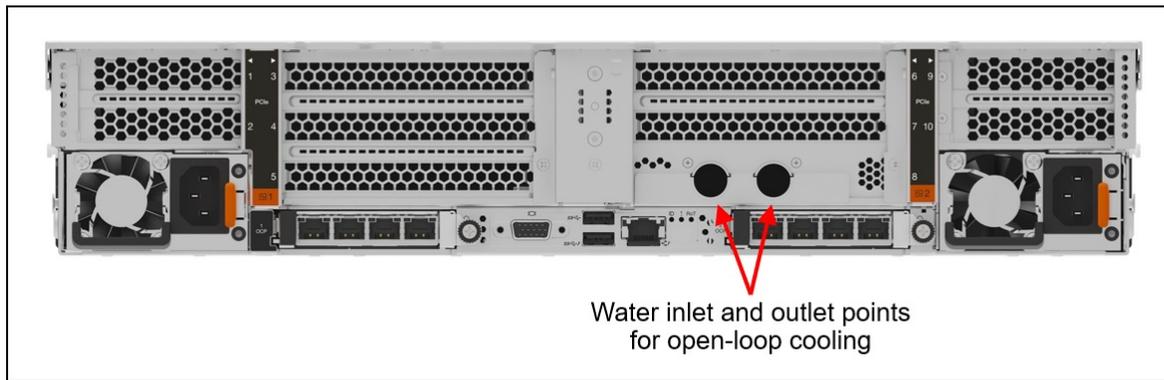


Figure 5. Rear of the SR650a V4 with open-loop water cooling

The following figure shows the locations of key components inside the server.

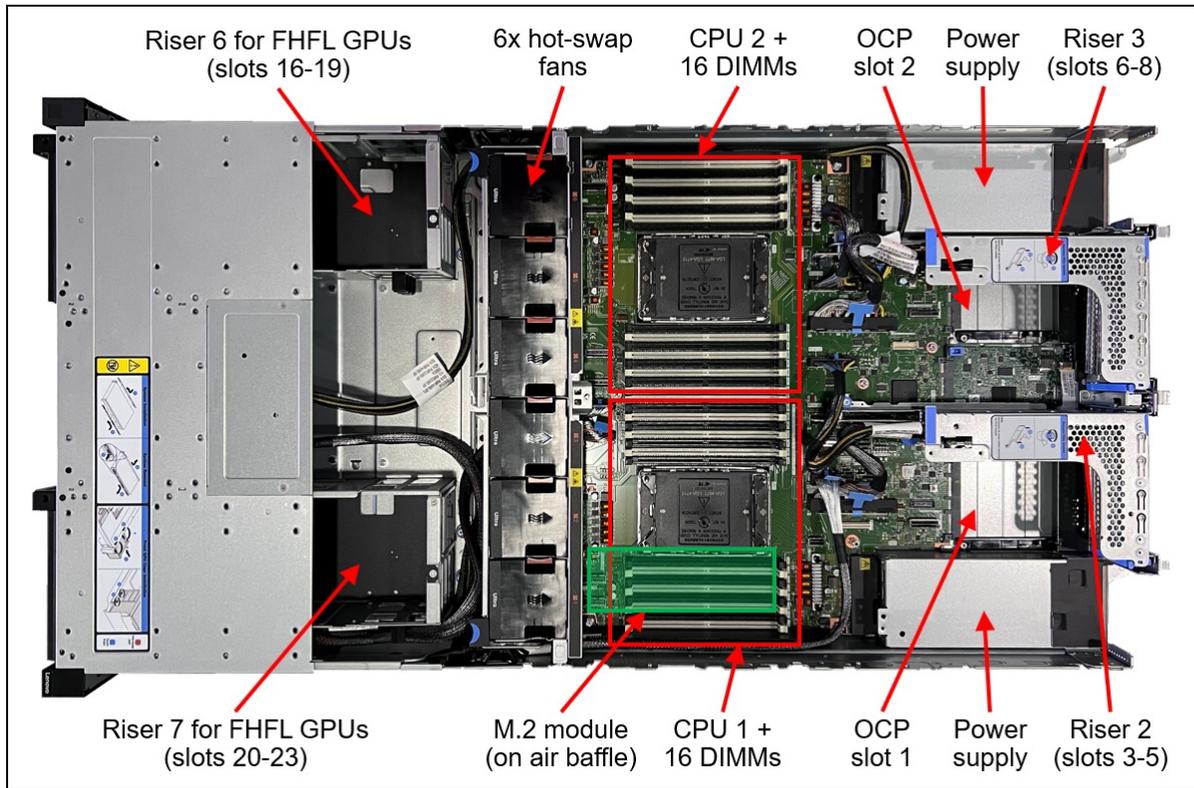


Figure 6. Internal view of the ThinkSystem SR650a V4

System architecture

The following figure shows the architectural block diagram of the SR650a V4, showing the major components and their connections.

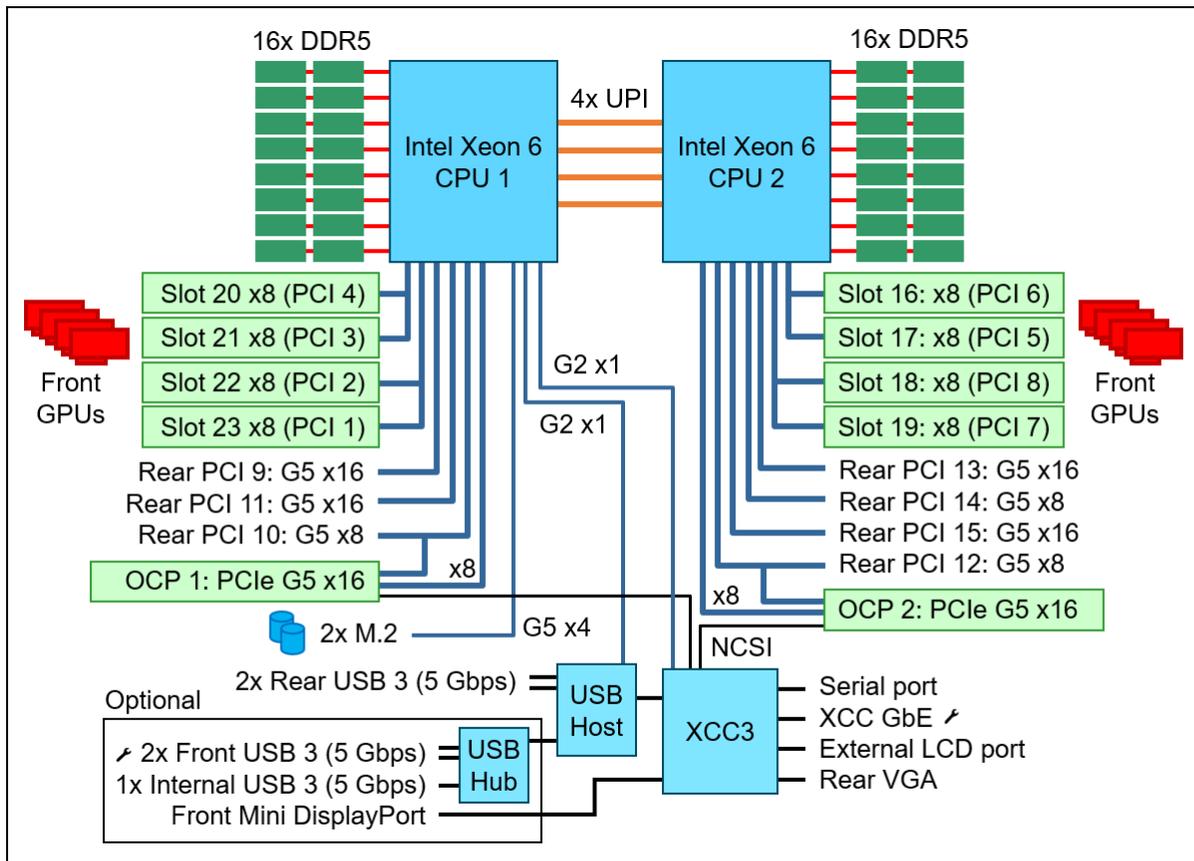


Figure 7. SR650a V4 system architectural block diagram

Most of the PCIe connections are implemented using cables, which maximizes the flexibility in how the server can be configured. For example, the block diagram below shows how a configuration with 6 rear slots is connected.

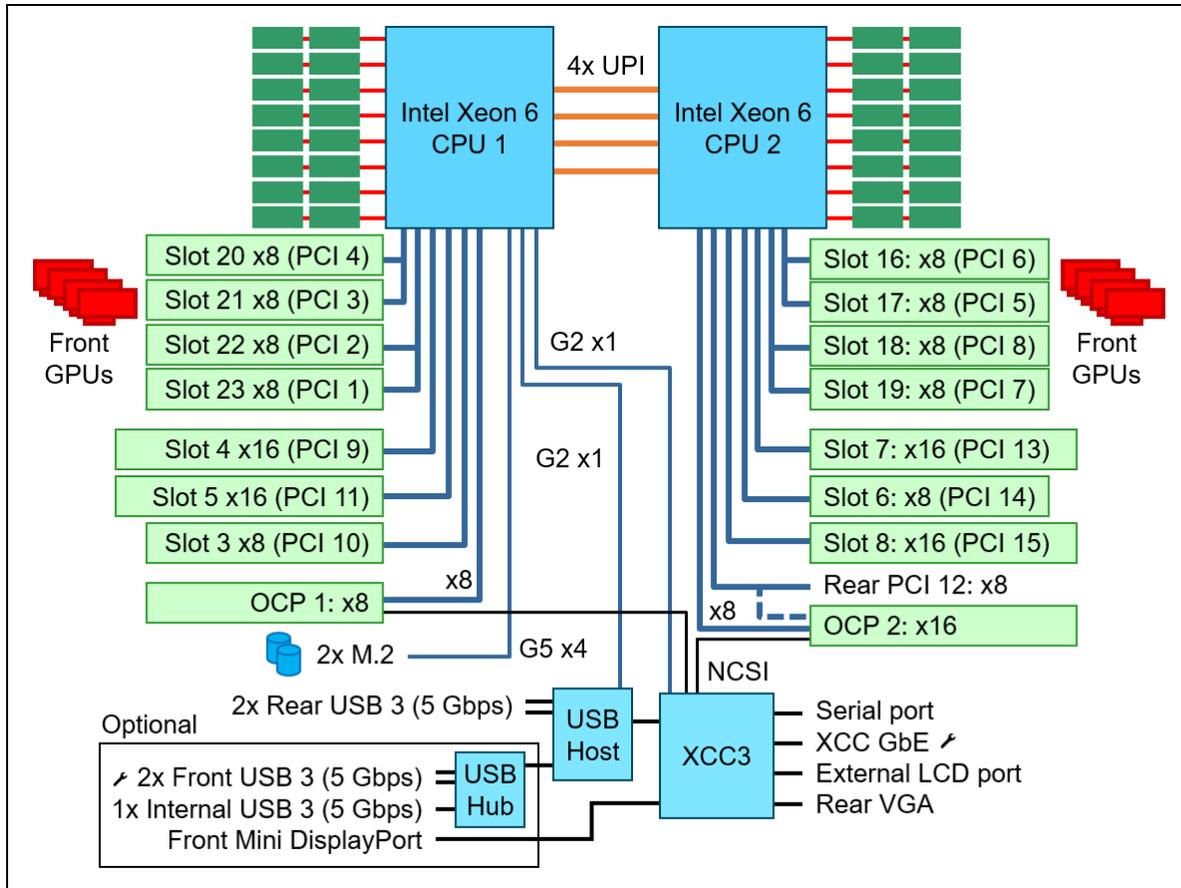


Figure 8. SR650a V4 system architectural block diagram with 6 rear slots

Standard specifications

The following table lists the standard specifications.

Table 1. Standard specifications

Components	Specification
Machine types	7DGC - 1 year warranty 7DGD - 3 year warranty
Form factor	2U rack
Processor	One or two Intel Xeon 6700P-series or 6500P-series processors (formerly codenamed "Granite Rapids"). Supports processors up to 86 cores and 172 threads, core speeds of up to 4.0 GHz, and TDP ratings of up to 350 W.
Chipset	None. Integrated into the processor
Memory	32 DIMM slots with two processors (16 DIMM slots per processor). Each processor has 8 memory channels, with 2 DIMMs per channel (DPC). Lenovo TruDDR5 RDIMMs and MRDIMMs are supported. RDIMMs operate at up to 6400 MHz at 1 DPC and up to 5200 MHz at 2 DPC. MRDIMMs are supported up to 8000 MHz at 1 DPC (no support for 2 DPC).
Memory maximum	Up to 8TB by using 32x 256GB 3DS RDIMMs
Memory protection	ECC, SDDC (for x4-based memory DIMMs), ADDDC (for x4-based memory DIMMs), and memory mirroring.

Components	Specification
Disk drive bays	<p>Up to 8x 2.5-inch or 8x E3.S hot-swap drive bays, all front accessible</p> <ul style="list-style-type: none"> • 2.5-inch drives can be SAS, SATA, or NVMe • E3.S drives are NVMe <p>M.2 support, for OS boot and drive storage support:</p> <ul style="list-style-type: none"> • 2x front or rear hot-swap M.2 drive bays, or • Internal M.2 module supporting up to two M.2 drives <p>See Supported drive bay combinations for details. AnyBay bays support SAS, SATA or NVMe drives. NVMe bays only support NVMe drives.</p>
Maximum internal storage	<ul style="list-style-type: none"> • 2.5-inch drives: <ul style="list-style-type: none"> ◦ 245.76TB using 8x 30.72TB 2.5-inch SAS/SATA SSDs ◦ 491.52TB using 8x 61.44TB 2.5-inch NVMe SSDs ◦ 19.2TB using 8x 2.4TB 2.5-inch HDDs • E3.S drives <ul style="list-style-type: none"> ◦ 122.88TB using 8x 15.36TB E3.S EDSFF NVMe SSDs
Storage controllers	<ul style="list-style-type: none"> • Onboard NVMe ports with optional RAID support using Intel VROC • NVMe RAID support using a Tri-mode RAID adapter • 12 Gb SAS/SATA RAID adapters, PCIe 4.0 or PCIe 3.0 host interface • 12 Gb SAS/SATA HBA (non-RAID), PCIe 4.0 or PCIe 3.0 host interface
Optical drive bays	No internal optical drive.
Tape drive bays	No internal backup drive.
Network interfaces	Two dedicated OCP 3.0 SFF slots with a PCIe 5.0 host interface, either x8 or x16. Support a variety of 2-port and 4-port adapters with up to 400 GbE network connectivity. One port of each installed OCP adapter can optionally be shared with the XClarity Controller (XCC) management processor for Wake-on-LAN and NC-SI support.
PCI Expansion slots	<p>Up to 8x slots at the front for GPUs, up to 6x slots at the rear, plus 2x OCP slots. All slots are PCIe 5.0. The use of Riser 3 and 6 requires 2 processors.</p> <ul style="list-style-type: none"> • Riser 2 (Rear): 3x full-height slots, two x16 and one x8 (CPU 1) • Riser 3 (Rear): 3x full-height slots, two x16 and one x8 (CPU 2) • Riser 6 (Front): 4x full-height slots (CPU 2) • Riser 7 (Front): 4x full-height slots (CPU 1) <p>Other slot configurations are available. See the I/O expansion for details. The server also supports rear hot-swap M.2 drives, instead of slot 8.</p> <p>All configurations include at the rear of the server:</p> <ul style="list-style-type: none"> • 2x OCP slots with PCIe 5.0 x16 or x8 connection <p>For 2.5-inch front drive configurations, the server supports the installation of a CFF RAID adapter or HBA in a dedicated area that does not consume any of the rear PCIe slots.</p>
GPU support	Support for up to 4x double-wide GPUs or 8x single-wide GPUs, installed in the front slots

Components	Specification
Ports	<p>Front: External diagnostics port, optional 2x USB 3 (5 Gb/s) port, one supports XCC local management, optional Mini DisplayPort (miniDP) v1.1a video port.</p> <p>Rear: 2x USB 3 (5 Gb/s) ports, 1x VGA video port, 1x RJ-45 1GbE systems management port for XCC remote management. Optional DB-9 COM serial port (installs in a slot). Support for an optional second RJ-45 1GbE systems management port for XCC remote management (installs in OCP adapter slot). Support for an optional adapter to share an incoming remote management network connection across 4 servers (installs in an OCP slot).</p> <p>Internal: Optional 1x USB 3 (5 Gb/s) connector for operating system or license key purposes</p>
Cooling	6x (with two processors installed) or 5x (with one processor installed) single-rotor or dual-rotor hot swap 60 mm fans, configuration dependent. Fans are N+1 redundant, tolerating a single-rotor failure. One fan integrated in each power supply. For customers with water infrastructure in their data center, the server also supports open-loop water cooling for efficient heat removal.
Power supply	Up to two hot-swap redundant AC power supplies, 80 PLUS Platinum or 80 PLUS Titanium certification. 800W, 1300W, 2000W, 2700W and 3200W AC options. All AC power supplies support 230V power; some also support 115V input supply. In China only, all power supply options support 240 V DC. Support for HVDC and -48V DC power supply options.
Video	Embedded graphics with 16 MB memory with 2D hardware accelerator, integrated into the XClarity Controller 3 management controller. Two video ports (rear VGA and optional front Mini DisplayPort); both can be used simultaneously if desired. Maximum resolution is 1920x1200 32bpp at 60Hz.
Hot-swap parts	Drives, power supplies, and fans.
Systems management	Operator panel with status LEDs. Optional External Diagnostics Handset with LCD display. Clarity Controller 3 (XCC3) embedded management based on the ASPEED AST2600 baseboard management controller (BMC) and OpenBMC, XClarity Administrator centralized infrastructure delivery, XClarity Integrator plugins, and XClarity Energy Manager centralized server power management. Optional XCC3 Premier to enable remote control functions and other features.
Security features	Chassis intrusion switch, Power-on password, administrator's password, Root of Trust module supporting TPM 2.0 and Platform Firmware Resiliency (PFR).
Operating systems supported	Microsoft Windows Server, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, VMware ESXi, Ubuntu Server. See the Operating system support section for specifics.
Limited warranty	Three-year or one-year (model dependent) customer-replaceable unit and onsite limited warranty with 9x5 next business day (NBD).
Service and support	Optional service upgrades are available through Lenovo Services: 4-hour or 2-hour response time, 6-hour fix time, 1-year or 2-year warranty extension, software support for Lenovo hardware and some third-party applications.
Dimensions	Width: 445 mm (17.5 in.), height: 87 mm (3.4 in.), depth: 924 mm (36.4 in.). See Physical and electrical specifications for details.
Weight	Maximum weight: 38.8 kg (85.5 lb)

Models

ThinkSystem SR650a V4 models can be configured by using the [Lenovo Data Center Solution Configurator \(DCSC\)](#).

Topics in this section:

- [CTO models](#)
- [CTO models for Windows 10 and Windows 11](#)
- [Base feature codes](#)

- [Preconfigured models](#)

CTO models

ThinkSystem SR650a V4 models can be configured by using the [Lenovo Data Center Solution Configurator \(DCSC\)](#).

Preconfigured server models may also be available for the SR650a V4, however these are region-specific; that is, each region may define their own server models, and not all server models are available in every region.

The following table lists the base CTO models of the ThinkSystem SR650a V4 server.

Table 2. Base CTO models

Machine Type/Model	Description
7DGDCTO2WW	ThinkSystem SR650a V4 – 3-year warranty
7DGCCTO2WW	ThinkSystem SR650a V4 – 1-year warranty

CTO models for Windows 10 and Windows 11

The SR650a V4 can run Windows 10 and Windows 11, however only a subset of adapters and drives can be installed. For ease of configuration, the following Base CTO models have been announced to assist building a configuration that can be used with the client operating systems.

Table 3. Base CTO models for SR650a V4 with Windows 10 and Windows 11

Machine Type/Model	Description
7DGDCTO4WW	ThinkSystem SR650a V4 Workstation - 3 year Warranty
7DGCCTO4WW	ThinkSystem SR650a V4 Workstation - 1 year Warranty

Base feature codes

Models of the SR650a V4 are defined based on the configuration of front drives. The feature codes for these chassis bases are as listed in the following table.

Table 4. Chassis base feature codes

Feature code	Description
C3QN	ThinkSystem SR650a V4 2.5"/EDSFF 3.S Chassis

Preconfigured models

The following tables list the available preconfigured models, grouped by region.

- [Models for EMEA region](#)

Refer to the Specifications section for information about standard features of the server.

Common to all models:

- Power supplies are Platinum unless otherwise stated
- All models include a Toolless Slide Rail Kit

Models for EMEA region

Table 5. Models for EMEA region

Model	Intel Xeon processor†	Memory	RAID	Drive bays	OCP	Front slots	Rear slots	Power supply	Fans	Internal USB	Front USB/DP	XCC3	Intru switch
Standard models with a 3-year warranty (machine type 7DGD)													
7DGDA016EA	2x 6730P 32C 250W 2.5GHz	16x64GB	Option	8x E3.S Open bay M.2 B540p Rear RAID, 1x 480GB ER3 M.2	Open	4x DW x16	Open	2x 2700W TT Prem	6x Ultra	Y	Y	Pre	Yes
7DGDA017EA	2x 6737P 32C 270W 2.9GHz	16x64GB	Option	8x E3.S Open bay M.2 B540p Rear RAID, 1x 480GB ER3 M.2	Open	4x DW x16	Open	2x 3200W TT Prem	6x Ultra	Y	Y	Pre	Yes
7DGDA018EA	2x 6767P 64C 350W 2.4GHz	16x64GB MCRDIMM	Option	8x E3.S Open bay M.2 B540p Rear RAID, 1x 480GB ER3 M.2	Open	4x DW x16	Open	2x 3200W TT Prem	6x Ultra	Y	Y	Pre	Yes

† Processor description: Processor model, number of cores, thermal design power (TDP), core frequency

Processors

The SR650a V4 supports one or two of the following Intel processors:

- Intel Xeon 6500-series with P-cores (formerly "Granite Rapids" or GNR)
- Intel Xeon 6700-series with P-cores (formerly "Granite Rapids" or GNR)

Topics in this section:

- [Processor options](#)
- [Processor features](#)
- [Intel On Demand feature licensing](#)
- [One-processor configurations](#)
- [Processor cooling](#)
- [Lenovo Processor Neptune Core Module - Open-loop liquid cooling](#)
- [UEFI operating modes](#)

Processor options

The following table lists the Intel Xeon 6500 and 6700-series processors with P-cores that are supported by the SR650a V4.

Table 6. Intel Xeon 6500 and 6700 P-core processor support

Part number	Feature code	SKU	Description	Maximum quantity
Intel Xeon 6500-series with P-cores				
4XG7B03703	C5QQ	6505P	ThinkSystem SR650/a V4 Intel Xeon 6505P 12C 150W 2.2GHz Processor w/o fan	2
4XG7B03700	C5R6	6507P	ThinkSystem SR650/a V4 Intel Xeon 6507P 8C 150W 3.5GHz Processor w/o fan	2
CTO only	C5RB	6511P	Intel Xeon 6511P 16C 150W 2.3GHz Processor	1*
4XG7B03705	C5RD	6515P	ThinkSystem SR650/a V4 Intel Xeon 6515P 16C 150W 2.3GHz Processor w/o fan	2
4XG7B03701	C5QV	6517P	ThinkSystem SR650/a V4 Intel Xeon 6517P 16C 190W 3.2GHz Processor w/o fan	2
4XG7B03707	C5QR	6520P	ThinkSystem SR650/a V4 Intel Xeon 6520P 24C 210W 2.4GHz Processor w/o Fan	2
CTO only	C5R9	6521P	Intel Xeon 6521P 24C 225W 2.6GHz Processor	1*
4XG7B03696	C659	6527P	ThinkSystem SR650/a V4 Intel Xeon 6527P 24C 255W 3.1GHz Processor w/o Fan	2
4XG7B03691	C5QT	6530P	ThinkSystem SR650/a V4 Intel Xeon 6530P 32C 225W 2.3GHz Processor w/o Fan	2
Intel Xeon 6700-series with P-cores				
4XG7B03702	C5R7	6714P	ThinkSystem SR650/a V4 Intel Xeon 6714P 8C 165W 4.0GHz Processor w/o fan	2
4XG7B03704	C5R5	6724P	ThinkSystem SR650/a V4 Intel Xeon 6724P 16C 210W 3.6GHz Processor w/o fan	2
4XG7B03693	C5R4	6730P	ThinkSystem SR650/a V4 Intel Xeon 6730P 32C 250W 2.5GHz Processor w/o Fan	2
CTO only	C5QN	6731P	Intel Xeon 6731P 32C 245W 2.5GHz Processor	1*
4XG7B03698	C5R0	6736P	ThinkSystem SR650/a V4 Intel Xeon 6736P 36C 205W 2.0GHz Processor w/o Fan	2
4XG7B03706	C5QX	6737P	ThinkSystem SR650/a V4 Intel Xeon 6737P 32C 270W 2.9GHz Processor w/o Fan	2
4XG7B03695	C5R3	6740P	ThinkSystem SR650/a V4 Intel Xeon 6740P 48C 270W 1.9GHz Processor w/o Fan	2
CTO only	C5QU	6741P	Intel Xeon 6741P 48C 300W 2.5GHz Processor	1*
4XG7B03690	C5R8	6747P	ThinkSystem SR650/a V4 Intel Xeon 6747P 48C 330W 2.7GHz Processor w/o Fan	2
4XG7B03697	C5R1	6760P	ThinkSystem SR650/a V4 Intel Xeon 6760P 64C 330W 2.2GHz Processor w/o Fan	2
CTO only	C5QW	6761P	Intel Xeon 6761P 64C 350W 2.5GHz Processor	1*
4XG7B03692	C5QY	6767P	ThinkSystem SR650/a V4 Intel Xeon 6767P 64C 350W 2.4GHz Processor w/o Fan	2
CTO only	C5QP	6781P	Intel Xeon 6781P 80C 350W 2.0GHz Processor	1*
4XG7B03694	C5QM	6787P	ThinkSystem SR650/a V4 Intel Xeon 6787P 86C 350W 2.0GHz Processor w/o Fan	2

* These processors are only supported in 1-socket configurations; configure-to-order (CTO) only, no field upgrades are supported

Processor features

Processors supported by the SR650a V4 include embedded accelerators to add even more processing capability:

- **QuickAssist Technology (Intel QAT)**
Help reduce system resource consumption by providing accelerated cryptography, key protection, and data compression with Intel QuickAssist Technology (Intel QAT). By offloading encryption and decryption, this built-in accelerator helps free up processor cores and helps systems serve a larger number of clients.
- **Intel Dynamic Load Balancer (Intel DLB)**
Improve the system performance related to handling network data on multi-core Intel Xeon Scalable processors. Intel Dynamic Load Balancer (Intel DLB) enables the efficient distribution of network processing across multiple CPU cores/threads and dynamically distributes network data across multiple CPU cores for processing as the system load varies. Intel DLB also restores the order of networking data packets processed simultaneously on CPU cores.
- **Intel Data Streaming Accelerator (Intel DSA)**
Drive high performance for storage, networking, and data-intensive workloads by improving streaming data movement and transformation operations. Intel Data Streaming Accelerator (Intel DSA) is designed to offload the most common data movement tasks that cause overhead in data center-scale deployments. Intel DSA helps speed up data movement across the CPU, memory, and caches, as well as all attached memory, storage, and network devices.
- **Intel In-Memory Analytics Accelerator (Intel IAA)**
Run database and analytics workloads faster, with potentially greater power efficiency. Intel In-Memory Analytics Accelerator (Intel IAA) increases query throughput and decreases the memory footprint for in-memory database and big data analytics workloads. Intel IAA is ideal for in-memory databases, open source databases and data stores like RocksDB, Redis, Cassandra, and MySQL.

The processors also support a separate and encrypted memory space, known as the SGX Enclave, for use by Intel Software Guard Extensions (SGX). The size of the SGX Enclave supported varies by processor model. Intel SGX offers hardware-based memory encryption that isolates specific application code and data in memory. It allows user-level code to allocate private regions of memory (enclaves) which are designed to be protected from processes running at higher privilege levels.

The following table summarizes the key features of the Intel Xeon 6500 and 6700 P-cores processors that are supported in the SR650a V4.

Table 7. Intel 6500 and 6700 P-core processor features

CPU model	Die	Cores/ threads	Core speed (Base / TB max)	L3 cache	Mem. chan	Max RDIMM speed	Max MRDIMM speed	UPI 2.0 links & speed	PCIe lanes	TDP	Accelerators				SGX Enclave Size
											QAT	DLB	DSA	IAA	
Intel Xeon 6500-series with P-cores															
6505P	LCC	12 / 24	2.2GHz / 4.1 GHz	48 MB	8	6400 MHz	None	4 / 24 GT/s	88	150W	2	2	2	2	128GB
6507P	LCC	8 / 16	3.5GHz / 4.3 GHz	48 MB	8	6400 MHz	None	4 / 24 GT/s	88	150W	2	2	2	2	512GB
6511P	LCC	16 / 32	2.3GHz / 4.2 GHz	72 MB	8	6400 MHz	None	None‡	88	150W	2	2	2	2	128GB
6515P	LCC	16 / 32	2.3GHz / 3.8 GHz	72 MB	8	6400 MHz	None	4 / 24 GT/s	88	150W	2	2	2	2	128GB
6517P	LCC	16 / 32	3.2GHz / 4.2 GHz	72 MB	8	6400 MHz	None	4 / 24 GT/s	88	190W	2	2	2	2	512GB

CPU model	Die	Cores/ threads	Core speed (Base / TB max)	L3 cache	Mem. chan	Max RDIMM speed	Max MRDIMM speed	UPI 2.0 links & speed	PCIe lanes	TDP					SGX Enclave Size
											QAT	DLB	DSA	IAA	
6520P	HCC	24 / 48	2.4GHz / 4 GHz	144 MB	8	6400 MHz	None	4 / 24 GT/s	88	210W	2	2	2	2	128GB
6521P	HCC	24 / 48	2.6GHz / 4.1 GHz	144 MB	8	6400 MHz	None	None‡	88	225W	3	3	3	3	128GB
6527P	HCC	24 / 48	3.0GHz / 4.2 GHz	144 MB	8	6400 MHz	None	4 / 24 GT/s	88	255W	4	4	4	4	512GB
6530P	HCC	32 / 64	2.3GHz / 4.1 GHz	144 MB	8	6400 MHz	None	4 / 24 GT/s	88	225W	2	2	2	2	128GB
Intel Xeon 6700-series with P-cores															
6714P	LCC	8 / 16	4.0GHz / 4.3 GHz	48 MB	8	6400 MHz	None	4 / 24 GT/s	88	165W	2	2	2	2	512GB
6724P	LCC	16 / 32	3.6GHz / 4.3 GHz	72 MB	8	6400 MHz	None	4 / 24 GT/s	88	210W	2	2	2	2	512GB
6730P	HCC	32 / 64	2.5GHz / 3.8 GHz	288 MB	8	6400 MHz	None	4 / 24 GT/s	88	250W	4	4	4	4	512GB
6731P	HCC	32 / 64	2.5GHz / 4.1 GHz	144 MB	8	6400 MHz	None	None‡	88	245W	3	3	3	3	128GB
6736P	HCC	36 / 72	2.0GHz / 4.1 GHz	144 MB	8	6400 MHz	None	4 / 24 GT/s	88	205W	4	4	4	4	512GB
6737P	HCC	32 / 64	2.9GHz / 4 GHz	144 MB	8	6400 MHz	None	4 / 24 GT/s	88	270W	4	4	4	4	512GB
6740P	XCC	48 / 96	2.1GHz / 3.8 GHz	288 MB	8	6400 MHz	None	4 / 24 GT/s	88	270W	2	2	2	2	128GB
6741P	XCC	48 / 96	2.5GHz / 3.8 GHz	288 MB	8	6400 MHz	None	None‡	88	300W	3	3	3	3	128GB
6747P	XCC	48 / 96	2.7GHz / 3.9 GHz	288 MB	8	6400 MHz	8000 MHz	4 / 24 GT/s	88	330W	4	4	4	4	512GB
6760P	XCC	64 / 128	2.2GHz / 3.8 GHz	320 MB	8	6400 MHz	None	4 / 24 GT/s	88	330W	2	2	2	2	128GB
6761P	XCC	64 / 128	2.5GHz / 3.9 GHz	336 MB	8	6400 MHz	8000 MHz	None‡	88	350W	3	3	3	3	128GB
6767P	XCC	64 / 128	2.4GHz / 3.9 GHz	336 MB	8	6400 MHz	8000 MHz	4 / 24 GT/s	88	350W	4	4	4	4	512GB
6781P	XCC	80 / 160	2.0GHz / 3.8 GHz	336 MB	8	6400 MHz	8000 MHz	None‡	88	350W	3	3	3	3	128GB
6787P	XCC	86 / 172	2.0GHz / 3.8 GHz	336 MB	8	6400 MHz	8000 MHz	4 / 24 GT/s	88	350W	4	4	4	4	512GB

‡ These processors not have UPI links and are rich one-socket (R1S) processors

Intel On Demand feature licensing

Intel Xeon 6 processors do not support Intel On Demand feature licensing for Accelerators.

One-processor configurations

The SR650a V4 can be used with one processor installed. Most core functions of the server (including the XClarity Controller) are connected to processor 1 as shown in the [System architecture](#) section.

With only one processor, the server has the following capabilities:

- 16 memory DIMMs
- Front riser 7 (slots 20, 21, 22, 23)
- Rear riser 2 (slots 3, 4, 5)
- OCP slot 1
- 8x 2.5-inch NVMe drives using onboard NVMe connections
- Up to 16x E3.S 1T NVMe drives
- Internal RAID adapter or HBA (CFF form factor)
- M.2 drives

Processor cooling

The SR650a V4 offers four implementations to remove heat from the processors:

- Entry heatsinks, suitable for configurations that generate lower heat levels, and processors $\leq 205W$
- Standard heatsinks with integrated heat pipes, suitable for configurations that generate lower heat levels, and processors $\leq 330W$
- Performance heatsinks with separate radiator connected heat pipes, suitable for most configurations
- Open-loop liquid cooling of the processors, as described in the [Lenovo Processor Neptune Core Module](#) section

For details about what configurations are supported with each, see the Thermal Rules section in the Lenovo Docs site for the SR650a V4:

https://pubs.lenovo.com/sr630-v4/thermal_rules

Ordering information is listed in the following table.

Table 8. Processor cooling options

Feature code	Description	Purpose
BPDQ	ThinkSystem SR650 V3 AL Extrusion Entry Heatsink	Entry 2U heatsink. Automatically selected based on the server configuration.
BPDR	ThinkSystem V4 2U Standard Heatsink	Standard 2U heatsink. Automatically selected based on the server configuration.
C3QR	ThinkSystem V4 2U Performance Heatsink	Performance 2U heatsink. Automatically selected based on the server configuration.
C1XH	ThinkSystem V4 1U/2U Processor Neptune Core Module	Enables open-loop liquid cooling of the processors. See the Lenovo Processor Neptune Core Module section.

Lenovo Processor Neptune Core Module - Open-loop liquid cooling

The SR650a V4 also supports advanced direct-water cooling (DWC) capability with the Lenovo Processor Neptune Core Module. This module implements a liquid cooling solution where heat from the processors is removed from the rack and the data center using an open loop and coolant distribution units.

With the Processor Neptune Core Module, all heat generated by the processors is removed from the server using water. This means that the server fans and data center air conditioning units only need to remove the heat generated by the other components. This results in lower air conditioning costs and it enables the use of slower fans which results in lower overall power consumption.

The following figure shows the Lenovo Processor Neptune Core Module.

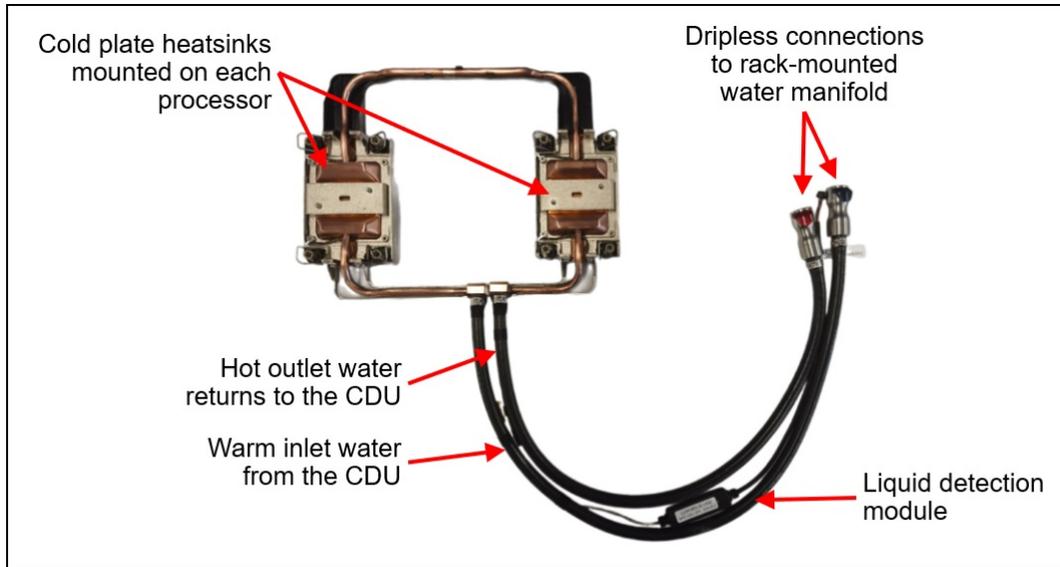


Figure 9. Lenovo Processor Neptune Core Module

The Processor Neptune Core Module also includes a leak detection module which can detect a leakage of more than 0.5ml (about 10 drops) along the length of the tube and then issue an event to the XClarity Controller. XCC will then post an error to the System Event Log and enable further actions. Once the liquid evaporates, a further event is issued to XCC.

The Processor Neptune Core Module is only available in CTO orders, not as a field upgrade. Ordering information is listed in the following table.

Table 9. Lenovo Processor Neptune Core Module

Part number	Feature code	Description
CTO only	C1XH*	ThinkSystem V4 1U/2U Processor Neptune Core Module

* In DCSC, this feature code is listed in the Processor tab

Configuration notes:

- The Processor Neptune Core Module requires water infrastructure be available in the rack cabinet and data center, as described in the [Water infrastructure](#) section.
- All processor SKUs are supported
- Either one or two CPUs are supported
- All front drive bay configurations are supported
- Slot 8 is not available for adapters - the water loop is routed through the space otherwise occupied by slot 8
- Rear drive bays are supported
- M.2 adapters are supported based on the configurations in the [Storage configurations](#) section
- Standard fans can be configured in most configurations
- The use of a cable management arm (CMA) is not supported

For more information, see the Thermal Rules page:

https://pubs.lenovo.com/sr650-v4/thermal_rules

UEFI operating modes

The SR650a V4 offers preset operating modes that affect energy consumption and performance. These modes are a collection of predefined low-level UEFI settings that simplify the task of tuning the server to suit your business and workload requirements.

The following table lists the feature codes that allow you to specify the mode you wish to preset in the factory for CTO orders.

Limited choice for LCC processors: If you select a processor with an LCC topology (see the Die column in the [Processor features](#) table), you will only be able to select General Computing - Power Efficiency (C3JB) in DCSC. The other modes are still supported, however, they can only be set in the field, not in the factory. Note that this is the only mode that is ERP Lot9-compliant for EU and UK customers.

Table 10. UEFI operating mode presets in DCSC

Feature code	Description
C3JB	General Computing - Power Efficiency (default)
C3JA	General Computing - Peak Frequency
C3J9	General Computing - Max Performance
C3J8	High Performance Computing (HPC)

The preset modes for the SR650a V4 are as follows:

- **General Computing - Power Efficiency** (feature C3JB): This workload profile optimizes the performance per watt efficiency with a bias towards performance. This workload profile is analogous to “Efficiency – Favor Performance” operating mode on ThinkSystem V3 servers. This profile contains settings for ENERGY STAR® and ERP Lot9 compliance.
- **General Computing - Peak Frequency** (feature C3JA): This workload profile is defined by the requirement to drive the highest core frequencies out of a processor across a subset of cores available – not for all cores active. This workload profile benefits workloads requiring either high per core and / or overall CPU package frequency. These workloads may have variable resource demands, are relatively insensitive to overall platform latency, and are generally CPU clock constrained. Tuning a system for highest possible core frequency may mean allowing inactive cores to transfer in and out of sleep states (C-states), which allows active cores to run at higher frequency for different durations of time. Allowing cores to go into low power states allows for higher per core frequency but can introduce “jitter” in the systems clock frequency.
- **General Computing - Max Performance** (feature C3J9): This workload profile maximizes the absolute performance of the system without regard for power savings. Power savings features are disabled. This operating mode should be used when an application can sustain work across all cores simultaneously and is Non-uniform Memory Access (NUMA) aware.
- **High Performance Computing (HPC)** (feature C3J8): This profile is for customers running large-scale scientific and engineering workloads. These environments tend to be clustered environments where each node performs at maximum utilization for extended periods of time, and the application is Non-uniform Memory Access (NUMA) aware.

Memory

The SR650a V4 uses Lenovo TruDDR5 memory operating at up to 8000 MHz. The server supports up to 32 DIMMs with 2 processors. The processors have 8 memory channels and support 2 DIMMs per channel (DPC). The server supports up to 8TB of memory using 32x 256GB RDIMMs and two processors.

DIMMs operate at the following speeds, up to the memory bus speed of the processor selected. See the [Processor features](#) section for specifics.

- RDIMMs and 3DS RDIMMs:
 - 1 DIMM per channel: Up to 6400 MHz
 - 2 DIMMs per channel using RDIMMs: Up to 5200 MHz
- MRDIMMs (support for MRDIMMs is processor-model dependent)
 - 1 DIMM per channel: 8000 MHz

Lenovo TruDDR5 memory uses the highest quality components that are sourced from Tier 1 DRAM suppliers and only memory that meets the strict requirements of Lenovo is selected. It is compatibility tested and tuned to maximize performance and reliability. From a service and support standpoint, Lenovo TruDDR5 memory automatically assumes the system warranty, and Lenovo provides service and support worldwide.

The following table lists the RDIMMs, 3DS RDIMMs, and MRDIMMs memory that are currently supported by the SR650a V4. These DIMMs are installed in the DIMM slots adjacent to the processors. The table also lists the supported quantities.

Table 11. Memory options for DIMM slots

Part number	Feature code	Description	DRAM technology	Quantities per CPU (double for 2 CPUs)
x4 RDIMMs				
4X77A90964	C0U9	ThinkSystem 32GB TruDDR5 6400MHz (1Rx4) RDIMM	16Gb	4, 8 per CPU
4X77A90966	C0TQ	ThinkSystem 64GB TruDDR5 6400MHz (2Rx4) RDIMM	16Gb	1, 4, 8, 16 per CPU
4X77A90997	BZ7D	ThinkSystem 96GB TruDDR5 6400MHz (2Rx4) RDIMM	24Gb	8, 16 per CPU
4X77A90993	C0U1	ThinkSystem 128GB TruDDR5 6400MHz (2Rx4) RDIMM	32Gb	8, 16 per CPU
x8 RDIMMs				
4X77A90963	C0U2	ThinkSystem 16GB TruDDR5 6400MHz (1Rx8) RDIMM	16Gb	1, 4, 8 per CPU
4X77A90965	BYTJ	ThinkSystem 32GB TruDDR5 6400MHz (2Rx8) RDIMM	16Gb	1, 4, 8, 12, 16 per CPU
4X77A90996	BZ7C	ThinkSystem 48GB TruDDR5 6400MHz (2Rx8) RDIMM	24Gb	4, 8 per CPU
MRDIMMs (operate at 8000 MHz in the SR650a V4) (Note: Not all processors support MRDIMMs - see Processor features)				
4X77A90998	C0TY	ThinkSystem 32GB TruDDR5 8800MHz (2Rx8) MRDIMM	-	8 per CPU
4X77A90999	C0TX	ThinkSystem 64GB TruDDR5 8800MHz (2Rx4) MRDIMM	-	8 per CPU

For more information on this memory, see the following Lenovo Press papers,

- [Introduction to DDR5 Memory](#)
- [Introduction to MRDIMM Memory Technology](#)

The following rules apply when specifying the memory configuration:

- The tables above list the supported quantities per processor. For two processors, install the same number of DIMMs to each processor. Other quantities are not supported.
- Only a subset of processors support MRDIMMs - see the table in the [Processor features](#) section for specifics.
- All installed DIMMs must be identical part numbers; mixing not supported

For best performance, consider the following:

- Ensure the memory installed is at least the same speed as the memory bus of the selected processor.
- Populate all memory channels.

The following memory protection technologies are supported:

- ECC detection/correction
- Bounded Fault detection/correction
- SDDC (for 10x4-based memory DIMMs; look for "x4" in the DIMM description)
- ADDDC (for 10x4-based memory DIMMs)
- Memory mirroring

See the Lenovo Press article "RAS Features of the Lenovo ThinkSystem Intel Servers" for more information about memory RAS features: <https://lenovopress.lenovo.com/lp1711-ras-features-of-the-lenovo-thinksystem-intel-servers>

If memory channel mirroring is used, then DIMMs must be installed in pairs (minimum of one pair per processor), and both DIMMs in the pair must be identical in type and size. 50% of the installed capacity is available to the operating system.

Memory rank sparing is implemented using ADDDC/ADC-SR/ADDDC-MR to provide DRAM-level sparing feature support.

Internal storage

The SR650a V4 has supported 8x 2.5-inch drive bays or 8x E3.S 1T drive bays in the front of the server:

- Up to 8x 2.5-inch SAS/SATA hot-swap bays, or
- Up to 8x 2.5-inch AnyBay hot-swap bays, or
- Up to 8x 2.5-inch NVMe hot-swap bays, or
- Up to 8x E3.S 1T NVMe hot-swap drive bays

The server supports configurations without any drive bays if desired.

The server also supports one or two M.2 drives, in three possible locations, configuration dependent:

- Installed in an M.2 adapter internal to the server (non-hot-swap)
- Hot-swap in the rear of the server
- Hot-swap in the front of the server (E3.S drive configurations only)

In this section:

- [NVMe drive support](#)
- [RAID 940 Tri-Mode support](#)
- [Front drive bays](#)
- [Storage configurations](#)
- [Field upgrades](#)
- [M.2 drives](#)
- [SED encryption key management with SKLM](#)

No support: Unlike the SR650 V4, the SR650a V4 does not support the following drive bays:

- Front 3.5-inch drive bays
- Front E3.S 2T drives bays including support for CXL memory
- Mid-chassis drive bays
- Rear drive bays

NVMe drive support

The SR650a V4 supports NVMe drives to maximize storage performance.

- In a 2.5-inch drive configuration, the server supports up to 8x NVMe drives without oversubscription (that is, each x4 drive has a dedicated x4 (4 lanes) connection to the processor).
- In a E3.S front drive configuration, the server supports up to 8x E3.S 1T NVMe drives without oversubscription

In addition, the SR650a V4 supports two M.2 NVMe drives for use as boot drives, as described in the [M.2 drives](#) section

The specifics of these configurations are covered in the [Storage configurations](#) section. The tables in those sections indicate the number of NVMe drives in each configuration.

RAID 940 Tri-Mode support

The RAID 940-8i and RAID 940-16i adapters also support NVMe through a feature named Tri-Mode support (or Trimode support). This feature enables the use of NVMe U.3 drives at the same time as SAS and SATA drives. Tri-Mode requires an AnyBay backplane. Cabling of the controller to the backplanes is the same as with SAS/SATA drives, and the NVMe drives are connected via a PCIe x1 link to the controller.

NVMe drives connected using Tri-Mode support provide better performance than SAS or SATA drives: A SATA SSD has a data rate of 6Gbps, a SAS SSD has a data rate of 12Gbps, whereas an NVMe U.3 Gen 4 SSD with a PCIe x1 link will have a data rate of 16Gbps. NVMe drives typically also have lower latency and higher IOPS compared to SAS and SATA drives. Tri-Mode is supported with U.3 NVMe drives and requires an AnyBay backplane.

Tri-Mode requires U.3 drives: Only NVMe drives with a U.3 interface are supported. U.2 drives are not supported. See the [Internal drive options](#) section for the U.3 drives supported by the server.

Front drive bays

The front drive bay zone supports the following configurations:

- 8x 2.5-inch drive bays (hot-swap)
- 8x E3.S 1T drive bays (hot-swap)
- No backplanes and no drives (supports [field upgrades](#))

The specific combinations that are supported in the SR650a V4 are shown in the following figures. The feature codes listed are the backplane feature codes when ordering CTO and correspond to the feature codes listed in the table below the figure.

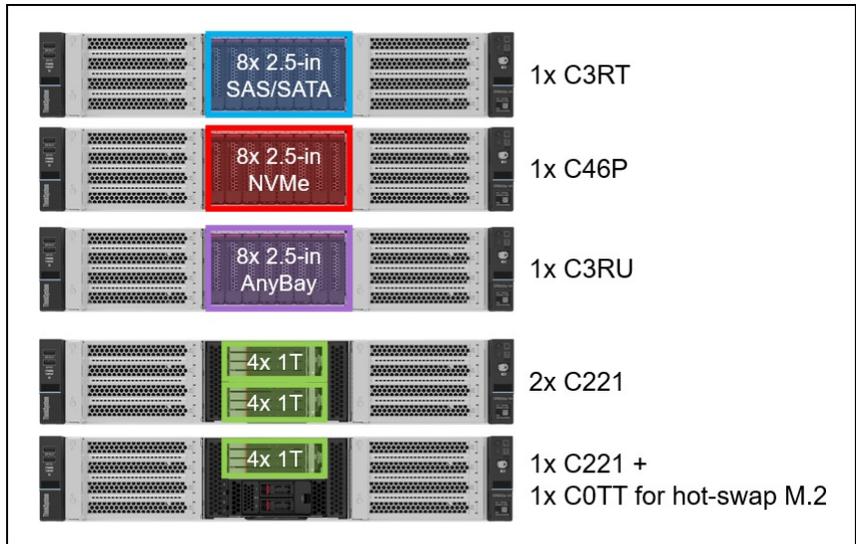


Figure 10. SR650a V4 front drive bay configurations

The backplanes used to provide these drive bays are listed in the following table.

Field upgrades: All front backplanes are available as part numbers for field upgrades along with require cable option kits, as described in the [Field upgrades](#) section below.

Table 12. Backplanes for front drive bays

Feature	Description	Bays	PCIe Gen	SAS Gen	Max qty
Front 2.5-inch drive backplane					
C3RT	ThinkSystem 2U V4 8x2.5" SAS/SATA Backplane	8	-	12Gb	1
C3RU	ThinkSystem 2U V4 1x8x2.5" SAS/SATA/NVME Front Backplane	8	Gen5	24Gb	1
C46P	ThinkSystem 2U V4 8x2.5" NVMe Backplane	8	Gen5	-	1
Front E3.S drive backplane					
C221	ThinkSystem V4 EDSFF E3.S 4x1T NVMe Gen5 Backplane	4	Gen5	-	2

The use of front drive bays has the following configuration rules:

- The SR650a V4 also supports configurations without any drive bays, allowing for drive bay upgrades as described in the [field upgrades](#) section.
- The use front-mounted hot-swap M.2 drives is supported when one E3.S drive bay is installed, as described in the [M.2 drives](#) section

Storage configurations

This section describes the various combinations of front and rear drives that the server supports, as well as M.2 support.

Tip: These tables are based on Storage Configs v1.5

In this section:

- [Overview of storage configs](#)
- [Details of storage configs](#)

The following tables summarize the storage configurations for the SR650a V4. For details, including processor requirements, cooling options, M.2 support, and controller selections, see the Details tables.

Overview of storage configs

The following table summarizes the storage configurations.

Jump down to the [details of the configurations](#).

Return to [Storage configurations](#).

Table 13. Overview of storage configs

Config	Total drives (NVMe)	Front drive bays					Backplanes
		SAS/SATA	AnyBay	NVMe	E3.S 1T	E3.S 2T	
73	8 (0)	8	0	0	0	0	8x2.5" SAS/SATA (C3RT)
74	8 (8)	0	0	8	0	0	8x2.5" NVMe G5 (C46P)
75	8 (8)	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU)
77	8 (8)	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU) (Tri-mode)
78	8 (8)	0	0	0	8	0	2x 4xE3.S 1T NVMe G5 (2x C221)
80	8 (0)	8	0	0	0	0	8x2.5" SAS/SATA (C3RT)
81	8 (8)	0	0	8	0	0	8x2.5" NVMe G5 (C46P)
82	8 (8)	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU)
84	8 (8)	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU) (Tri-mode)
85	8 (8)	0	0	0	8	0	2x 4xE3.S 1T NVMe G5 (2x C221)
86	4 (4)	0	0	0	4	0	4xE3.S 1T NVMe G5 (C221)
111	4 (4)	0	0	0	4	0	4xE3.S 1T NVMe G5 (C221)

Details of storage configs

The following table lists the detailed storage configurations.

Go back to the [overview of the configurations](#).

Return to [Storage configurations](#).

The table also includes a **PCIe slots** column that indicates the number of slots available with each configuration. For details of the slots supported with each configuration, refer to the [Rear slot configurations](#) section.

Table 14. Details of storage configs

Config	CPUs	CPU cooling			Front drive bays					Backplanes	M.2			Controllers	PCIe slots
		Air cooled	Open loop CPUs	Open loop CPUs+Mem	SAS/SATA	AnyBay	NVMe	E3.S 1T	E3.S 2T		M.2 Internal	M.2 Rear HS	M.2 Front HS		
73-1	1 or 2	Y	Y	N	8	0	0	0	0	8x2.5" SAS/SATA (C3RT)	Y	Y	N	(5350-8i or 9350-8i or 4350-16i or 9350-16i)	5 (3,4,5,7,8)
73-2	1 or 2	Y	Y	N							Y	Y	N	(545-8i or 940-8i or 440-16i or 940-16i)	5 (3,4,5,7,8)
73-3	2 only	Y	Y	N							Y	Y	N	(440-16i CFF or 940-16i CFF)	5 (3,4,5,7,8)
73-4	1 only	Y	Y	N							Y	Y	N	(440-16i CFF or 940-16i CFF)	2 (4,5)
74-1	2 only	Y	Y	N	0	0	8	0	0	8x2.5" NVMe G5 (C46P)	Y	Y	N	OB NVMe	3 (3,5,7)
75-1	2 only	Y	Y	N	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU)	Y	Y	N	OB NVMe + (5350-8i or 9350-8i or 4350-16i or 9350-16i)	3 (3,5,7)
75-2	2 only	Y	Y	N							Y	Y	N	OB NVMe + (545-8i or 940-8i or 440-16i or 940-16i)	3 (3,5,7)
75-3	2 only	Y	Y	N							Y	Y	N	OB NVMe + (440-16i CFF or 940-16i CFF)	3 (3,5,7)
77-1	1 or 2	Y	Y	N	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU) (Tri-mode)	Y	Y	N	(940-8i or 940-16i) Tri-mode	5 (3,4,5,7,8)
77-2	2 only	Y	Y	N							Y	Y	N	940-16i CFF Tri-mode	5 (3,4,5,7,8)
77-3	1 only	Y	Y	N							Y	Y	N	940-16i CFF Tri-mode	2 (4,5)
78-1	2 only	Y	Y	N	0	0	0	8	0	2x 4xE3.S 1T NVMe G5 (2x C221)	Y	Y	N	OB NVMe	4 (3,5,6,8)
78-2	1 only	Y	Y	N							Y	Y	N	OB NVMe	1 (3)
80-1	1 or 2	Y	Y	N	8	0	0	0	0	8x2.5" SAS/SATA (C3RT)	Y	Y	N	(5350-8i or 9350-8i or 4350-16i or 9350-16i)	6 (3,4,5,6,7,8)
80-2	1 or 2	Y	Y	N							Y	Y	N	(545-8i or 940-8i or 440-16i or 940-16i)	6 (3,4,5,6,7,8)
80-3	2 only	Y	Y	N							Y	Y	N	(440-16i CFF or 940-16i CFF)	5 (3,4,5,7,8)
80-4	1 only	Y	Y	N							Y	Y	N	(440-16i CFF or 940-16i CFF)	2 (4,5)
81-1	2 only	Y	Y	N	0	0	8	0	0	8x2.5" NVMe G5 (C46P)	Y	Y	N	OB NVMe	4 (3,5,6,7)
82-1	2 only	Y	Y	N	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU)	Y	Y	N	OB NVMe + (5350-8i or 9350-8i or 4350-16i or 9350-16i)	4 (3,5,6,7)
82-2	2 only	Y	Y	N							Y	Y	N	OB NVMe + (545-8i or 940-8i or 440-16i or 940-16i)	4 (3,5,6,7)
82-3	2 only	Y	Y	N							Y	Y	N	OB NVMe + (440-16i CFF or 940-16i CFF)	3 (3,5,7)
84-1	1 or 2	Y	Y	N	0	8	0	0	0	8x2.5" AnyBay G5 (C3RU) (Tri-mode)	Y	Y	N	(940-8i or 940-16i) Tri-mode	6 (3,4,5,6,7,8)
84-2	2 only	Y	Y	N							Y	Y	N	940-16i CFF Tri-mode	5 (3,4,5,7,8)
84-3	1 only	Y	Y	N							Y	Y	N	940-16i CFF Tri-mode	2 (4,5)
85-1	2 only	Y	Y	N	0	0	0	8	0	2x 4xE3.S 1T NVMe G5 (2x C221)	Y	Y	N	OB NVMe	4 (3,5,6,8)
85-2	1 only	Y	Y	N							Y	Y	N	OB NVMe	1 (3)

Config	CPUs	CPU cooling			Front bays		drive		Backplanes	M.2			Controllers	PCIe slots	
		Air cooled	Open loop CPUs	Open loop CPUs+Mem	SAS/SATA	AnyBay	NVMe	E3.S 1T		E3.S 2T	M.2 Internal	M.2 Rear HS			M.2 Front HS
86-1	1 or 2	Y	Y	N	0	0	0	4	0	4xE3.S 1T NVMe G5 (C221)	N	N	Y	OB NVMe	5 (3,5,6,7,8)
111-1	1 or 2	Y	Y	N	0	0	0	4	0	4xE3.S 1T NVMe G5 (C221)	N	N	Y	OB NVMe	5 (3,5,6,7,8)

Field upgrades

The SR650a V4 is orderable without drive bays, allowing you to add a backplane, cabling and controllers as field upgrades. The server also supports upgrading some configurations by adding additional front drive bays (for example, upgrading from 8 to 16x 2.5-inch drive bays).

Upgrade path: The key criteria for upgrade support is to ensure that the target configuration is one of the supported drive bay configurations as listed in the [Supported drive bay combinations](#) section.

To add drive bays you will need to order both drive backplanes and cable kits. Backplane kits do not include cables.

In this section:

- [Drive bay field upgrades - 2.5-inch chassis](#)
- [Drive bay field upgrades - E3.S chassis](#)
- [Adding an Internal \(CFF\) RAID adapter or HBA](#)
- [Replacement cable routing walls](#)
- [RAID flash power module \(supercap\) support](#)
- [2.5-inch drive bay fillers](#)

When adding drive bays, you will also need to add the appropriate storage controller(s). Consult the tables in the [Storage configurations](#) section to determine what controller sections are supported and what additional controllers you will need. Controllers are described in the [Controllers for internal storage](#) section.

Drive bay field upgrades - 2.5-inch chassis

The tables below lists the backplane kits and cable kits needed to build one of the supported 2.5-inch chassis configurations.

The Config numbers listed here match the configuration listed in the Storage configuration [Overview](#) and [Details](#) sections.

Return to [Field upgrades](#).

For more information about the backplane kits and cable kits, see the Lenovo server options site: https://serveroption.lenovo.com/cable_kit_options/

Table 15. Drive bay field upgrade for the 2.5-inch chassis (Blue = SAS/SATA, Purple = AnyBay, Red = NVMe)

Config	2.5" front bays				Backplane and cable kits required (all required)
	SAS/SATA	Any Bay	NVMe	Tri-Mode	
73, 80	8	0	0	0	<ul style="list-style-type: none"> • 4XH7B03842, ThinkSystem SR650/a V4 8x2.5" SAS/SATA Backplane Option Kit • 4X97B04117, ThinkSystem SR650/a V4 2.5" Chassis Front BP1 SAS/SATA Cable Kit
74, 81	0	8	0	0	<ul style="list-style-type: none"> • 4XH7B03841, ThinkSystem SR650/a V4 8x2.5" NVMe Gen5 Backplane Option Kit • 4X97B03868, ThinkSystem SR650a V4 2.5" Chassis Front BP1 NVMe Cable Kit
75, 82	0	0	8	0	<ul style="list-style-type: none"> • 4XH7B03840, ThinkSystem SR650/a V4 8x2.5" AnyBay Gen5 Backplane Option Kit • 4X97B04117, ThinkSystem SR650/a V4 2.5" Chassis Front BP1 SAS/SATA Cable Kit • 4X97B03868, ThinkSystem SR650a V4 2.5" Chassis Front BP1 NVMe Cable Kit
77, 84	0	0	0	8	<ul style="list-style-type: none"> • 4XH7B03840, ThinkSystem SR650/a V4 8x2.5" AnyBay Gen5 Backplane Option Kit • 4X97B04117, ThinkSystem SR650/a V4 2.5" Chassis Front BP1 SAS/SATA Cable Kit

Drive bay field upgrades - E3.S chassis

The tables below lists the backplane kits and cable kits needed to build one of the supported configurations with E3.S drive bays.

The Config numbers listed here match the configuration listed in the Storage configuration [Overview](#) and [Details](#) sections.

Return to [Field upgrades](#).

Note: The table indicates the locations of each E3.S backplane. The locations of the 2 backplanes (BP1 and BP2) are shown in the following figure.

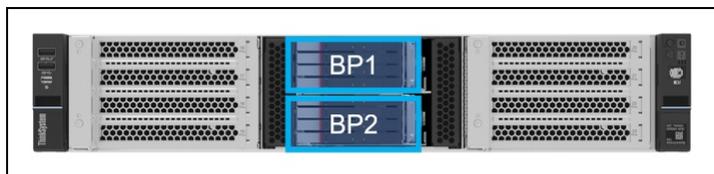


Figure 11. E3.S backplane numbering

For more information about the backplane kits and cable kits, see the Lenovo server options site: https://serveroption.lenovo.com/cable_kit_options/

Table 16. Field upgrades - E3.S drive bays (BP = Backplane)

Config (Number of CPUs)	BP1	Backplane and cable kits required (all required) Some configs also require replacement cable walls
	BP2	
117, 86 (1P)	4x 1T	<ul style="list-style-type: none"> 1x 4XH7B03854, ThinkSystem V4 1U/2U E3.S 4x1T Backplane Option Kit 2x 4X97B03887, ThinkSystem SR650a V4 E3.S 1T Long Cable Kit
	M.2	
78, 85 (2P)	4x 1T	<ul style="list-style-type: none"> 2x 4XH7B03854, ThinkSystem V4 1U/2U E3.S 4x1T Backplane Option Kit 2x 4X97B03887, ThinkSystem SR650a V4 E3.S 1T Long Cable Kit 2x 4X97B03887, ThinkSystem SR650a V4 E3.S 1T Long Cable Kit
	4x 1T	

Adding an Internal (CFF) RAID adapter or HBA

If you want to add an internal (CFF) storage adapter (HBA or RAID adapter) to a configuration, you will need to order the cable kit as listed in the following table. Suitable upgrades are either replacing an existing adapter in a rear PCIe slot, or adding the CFF adapter to a server without any storage adapter installed.

Table 17. Cable needed for field upgrades to add CFF adapter

Part number	Description
4X97B03877	ThinkSystem SR650/a V4 Internal Raid/HBA Adapter Cable Kit

Replacement cable routing walls

Cable walls are used to guide signal and power cables through the server and to maximize airflow across the components. The server comes with 1U cable walls at both side of the processor board. It is recommended to replace the 1U cable walls with 2U cable walls when there are more than five cables routed at one side.

The 2U cable walls are required for some E3.S configurations and will be automatically derived for CTO orders. For field upgrades, see the [Drive bay field upgrades - E3.S chassis](#) section, where the table indicates when replacement cable walls are required.

Table 18. Replacement cable routing walls

Part number	Feature code	Description
4X97B04305	C3RS	ThinkSystem SR650/a V4 2U Cable Wall Option Kit <ul style="list-style-type: none">• 2x 2U cable wall (SBB7A86017, C3RS)

For details on installing the cable wall replacements, see the SR650a V4 User Guide:
https://pubs.lenovo.com/sr650-v4/cable_wall_replacement_2u

RAID flash power module (supercap) support

If you plan to add one of the RAID adapters that includes a RAID flash power module (supercap) as a field upgrade, then you will also need to order a Supercap installation kit for the power module. For CTO orders, the components in the installation kit are automatically derived when you select the RAID adapter.

The adapters that this applies to are as follows:

- Any supported RAID 940 adapter
- Any supported RAID 9350 adapter

There are up to four possible locations for supercaps, depending on the air baffle or mid-chassis drive bays installed, as follows:

- Standard air baffle: 4 supercaps
- GPU air baffle: 4 supercaps

See the following User Guide page for the specifics on the locations:
https://pubs.lenovo.com/sr650-v4/supercap_replacement

Supercap holders are integrated into the air baffles and mid-chassis drive cage. No additional components are needed.

2.5-inch drive bay fillers

Backplane option kits include the necessary drive bay fillers, however if needed, additional blanks can be ordered as listed in the following table.

Table 19. Drive bay fillers for 2.5-inch bays

Part number	Description
4XH7A99569	ThinkSystem 2.5" 1x1 HDD Filler by 8 units (contains 8x single drive-bay fillers)

M.2 drives

In this section:

- [M.2 ordering information](#)
- [VROC RAID support for the B340i-2i adapter](#)
- [M.2 adapter features](#)
- [M.2 field upgrades for internal M.2](#)
- [M.2 field upgrades for hot-swap M.2](#)

The SR650a V4 supports one or two M.2 form-factor SATA or NVMe drives for use as an operating system boot solution or as additional storage.

M.2 drives can be installed in one of the following locations:

- Internal to the server (non-hot-swap) on an M.2 module which is mounted horizontally in the server. RAID is either integrated or with the use of VROC, depending on the M.2 adapter selected. Locations are as follows:
 - In servers without mid-chassis drives, the M.2 module is mounted on the air baffle
 - With a mid-chassis drive cage, the M.2 module is mounted on the drive cage, as shown in the [Mid drive bays](#) section.
- Rear-mounted hot-swap M.2 drives with integrated RAID.
- Front-mounted hot-swap M.2 drives with integrated RAID. Only supported with E3.S drive configurations.

The following figure shows the SR650a V4 with front and rear hot-swap M.2 drive bays.

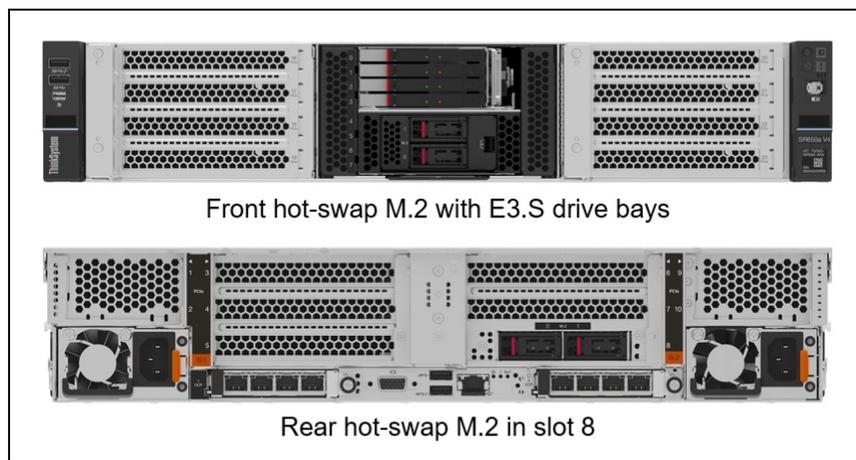


Figure 12. Hot-swap M.2 drive bays

The following figure shows the components of the rear hot-swap M.2 drive bays.

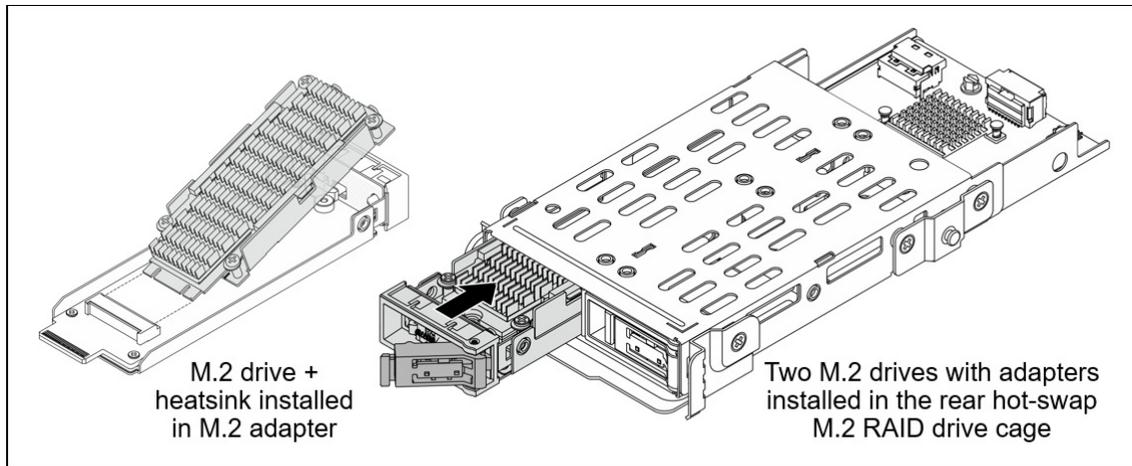


Figure 13. Rear hot-swap M.2 drive bays

The following figure shows the components of the front hot-swap M.2 drive bays.

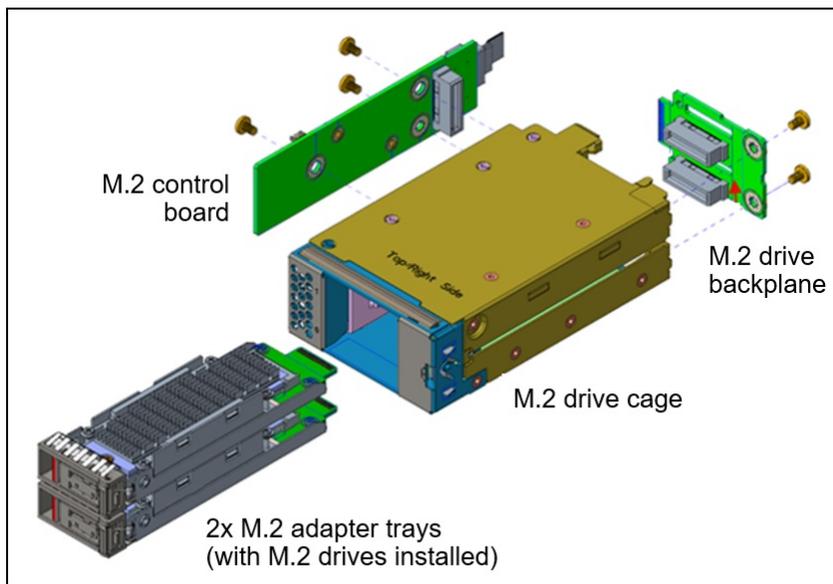


Figure 14. Front hot-swap M.2 drive bays

M.2 ordering information

The supported M.2 module is listed in the following table. For field upgrades see the [M.2 field upgrades](#) section below.

Table 20. M.2 adapters

Part number	Feature code	Description	SATA drives	NVMe drives	RAID	Max Qty
Internal M.2 (non-hot-swap)						
4Y37A91802	C0JK	ThinkSystem M.2 B340i-2i NVMe Enablement Adapter	No	Yes (x2 lanes per drive)	VROC	1
4Y37A93746	C26V	ThinkSystem M.2 RAID B545i-2i SATA/NVMe Adapter	Yes	Yes (x1 lane per drive)	Integrated (Broadcom)	1
Rear hot-swap M.2						
4XH7B03860	C0JJ	ThinkSystem SR650/a V4 M.2 RAID B450p-2HS SATA/NVMe Enablement Kit <ul style="list-style-type: none"> • M.2 rear drive cage for FH slot • M.2 rear drive cage for 2xFH slots • M.2 2-drive hot-swap backplane • 2x empty M.2 hot-swap adapter tray • Signal and power cables 	Yes	Yes (x1 lane per drive)	Integrated (Broadcom)	1
Front hot-swap M.2						
4XH7B03857	C0TT	ThinkSystem SR650/a V4 M.2 RAID B540d-2HS SATA/NVMe Enablement Kit <ul style="list-style-type: none"> • M.2 front drive cage • M.2 2-drive hot-swap backplane • M.2 control board • 2x empty M.2 hot-swap adapter trays • Signal and power cables 	Yes	Yes (x1 lane per drive)	Integrated (Broadcom)	1

* For CTO orders in DCSC, to select the front hot-swap M.2, you will need to select ThinkSystem M.2 RAID B540d-2HS SATA/NVMe Enablement Kit - Controller Board (feature C217) which will then derive ThinkSystem M.2 RAID B540d-2HS SATA/NVMe Enablement Kit- Boot Backplane (feature C0TT) plus any other needed components.

Configuration notes:

- M.2 is not supported with all storage configurations - see [Storage configurations](#) for details.
- For CTO orders, all other necessary components, except for the M.2 drives themselves, will be automatically included in the order. For drives, see the [Internal drive options](#) section.
- For field upgrades of the internal M.2, an additional cable is needed as described in the [M.2 field upgrades for internal M.2](#) section below.
- For field upgrades of the rear or front hot-swap M.2, one additional kit is needed for each M.2 drive you plan to install, as described in the [M.2 field upgrades for hot-swap M.2](#) section below.
- Rear M.2 is not supported with open-loop water cooling

VROC RAID support for the B340i-2i adapter

ThinkSystem M.2 B340i-2i NVMe Enablement Adapter (4Y37A91802) optionally supports RAID with the use of Intel VROC. For CTO orders, ordering information is listed in the following table.

Table 21. CTO feature codes to select VROC RAID for ThinkSystem M.2 B340i-2i NVMe Enablement Adapter (4Y37A91802)

Part number	Feature code	Description	Max Qty	RAID support
VROC NVMe RAID for ThinkSystem M.2 B340i-2i NVMe Enablement Adapter (4Y37A91802)				
4L47A92670*	BZ4X	Intel VROC RAID1 Only for M.2	1	RAID-1
4L47A83669*	BS7M	Intel VROC (VMD NVMe RAID) Standard for M.2	1	RAID-0,1

* The part numbers enable VROC for all installed drives, not just M.2

M.2 adapter features

The ThinkSystem M.2 B340i-2i NVMe Enablement Adapter (4Y37A91802) has the following features:

- Supports one or two NVMe M.2 drives (SATA not supported)
- Drives are not hot-swap
- Support M.2 2280 (80mm) drive form factor only
- No built-in RAID support (optionally supports Intel VROC NVMe RAID)
- PCIe 5.0 x4 host interface; PCIe 5.0 x2 connection to each drive
- Management and configuration support via UEFI and OS-based tools
- Supports monitoring and reporting of events and temperature
- Firmware update via Lenovo firmware update tools
- Supports SED drive encryption

The ThinkSystem M.2 RAID B545i-2i SATA/NVMe Adapter (4Y37A93746) has the following features:

- Supports one or two M.2 drives, either SATA or NVMe
- Drives are not hot-swap
- Supports M.2 2242, 2260, 2280 drive form factors (42mm, 60mm, 80mm)
- RAID support via an onboard Broadcom SAS3808N RAID Controller
- With 1 drive, supports JBOD
- With 2 drives, supports 2-drive RAID-0, 2-drive RAID-1, or JBOD (default is RAID-1)
- PCIe 4.0 x2 host interface; PCIe 4.0 x1 connection to each drive
- Management and configuration support via UEFI and OS-based tools
- Supports monitoring and reporting of events and temperature
- Firmware update via Lenovo firmware update tools
- Supports SED drive encryption

The ThinkSystem SR650/a V4 M.2 RAID B450p-2HS SATA/NVMe Enablement Kit (4XH7B03860) has the following features:

- Supports one or two M.2 drives, either SATA or NVMe
- Each drive is installed in a hot-swap carrier
- Support M.2 2280 (80mm) drive form factor only
- RAID support via an onboard Broadcom SAS3808N RAID Controller
- With 1 drive, supports JBOD
- With 2 drives, supports 2-drive RAID-0, 2-drive RAID-1, or JBOD (default is RAID-1)
- PCIe 4.0 x2 host interface; PCIe 4.0 x1 connection to each drive
- Management and configuration support via UEFI and OS-based tools
- Supports monitoring and reporting of events and temperature
- Firmware update via Lenovo firmware update tools
- Supports SED drive encryption

The ThinkSystem SR650/a V4 M.2 RAID B540d-2HS SATA/NVMe Enablement Kit (4XH7B03857) has the following features:

- Supports one or two M.2 drives, either SATA or NVMe
- Each drive is installed in a hot-swap carrier
- Support M.2 2280 (80mm) drive form factor only
- RAID support via an onboard Broadcom SAS3808N RAID Controller
- With 1 drive, supports JBOD
- With 2 drives, supports 2-drive RAID-0, 2-drive RAID-1, or JBOD (default is RAID-1)
- PCIe 4.0 x2 host interface; PCIe 4.0 x1 connection to each drive
- Management and configuration support via UEFI and OS-based tools
- Supports monitoring and reporting of events and temperature
- Firmware update via Lenovo firmware update tools
- Supports SED drive encryption

M.2 field upgrades for internal M.2

For field upgrades to add one of the supported internal M.2 adapters, the SR650a V4 also requires an additional M.2 cable kit. Ordering information is listed in the following table.

Table 22. M.2 Cable Kits for field upgrades to add an internal M.2 adapter

Part number	Description	Qty
4XH7B03859	ThinkSystem SR650/a V4 Internal M.2 Enablement Cable kit	1

M.2 field upgrades for hot-swap M.2

This section applies to both the front hot-swap M.2 and rear hot-swap M.2.

In addition to the M.2 adapter kit (4XH7B03860 for rear, or 4XH7B03857 for front as listed in the [M.2 adapters table](#)), for each M.2 drive you want to add to the server as a hot-swap drive, you will also need to a drive kit which supplies the M.2 adapter, drive tray, and drive heatsink that are needed. One kit is required for each M.2 drive.

Table 23. M.2 kit for field upgrades to add hot-swap M.2 drives

Part number	Description	Qty
4XH7A96837	ThinkSystem V4 Hot Swap M.2 SATA/NVMe Drive Assembly Kit (see below) <ul style="list-style-type: none"> • M.2 adapter • M.2 drive tray • M.2 drive heatsink 	1 per drive

The following figure shows the components of the ThinkSystem V4 Hot Swap M.2 SATA/NVMe Drive Assembly Kit (4XH7A96837), used for hot-swap M.2 (for both front and rear drive bays, not for internal M.2). The M.2 drive needs to be ordered separately.

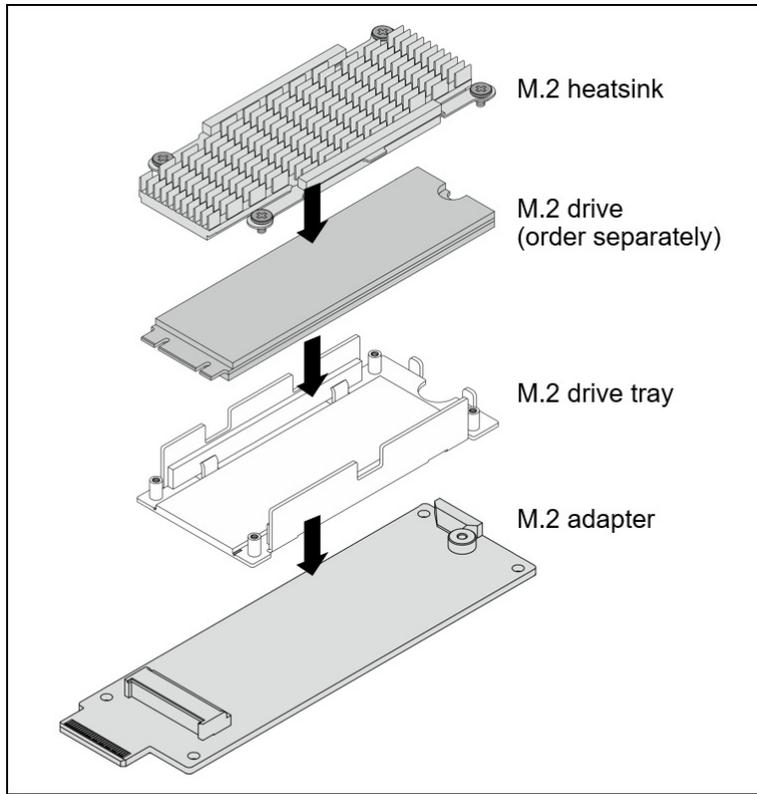


Figure 15. Components of the ThinkSystem V4 Hot Swap M.2 SATA/NVMe Drive Assembly Kit

SED encryption key management with SKLM

The server supports self-encrypting drives (SEDs) as listed in the [Internal drive options](#) section. To effectively manage a large deployment of these drives in Lenovo servers, IBM Security Key Lifecycle Manager (SKLM) offers a centralized key management solution.

The IBM Security Key Lifecycle Manager software is available from Lenovo using the ordering information listed in the following table.

Table 24. IBM Security Key Lifecycle Manager licenses

Part number	Feature	Description
SKLM Basic Edition		
7S0A007FWW	S874	IBM Security Key Lifecycle Manager Basic Edition Install License + SW Subscription & Support 12 Months
7S0A008VWW	SDJR	IBM Security Key Lifecycle Manager Basic Edition Install License + SW Subscription & 3 Years Of Support
7S0A008WWW	SDJS	IBM Security Key Lifecycle Manager Basic Edition Install License + SW Subscription & 4 Years Of Support
7S0A008XWW	SDJT	IBM Security Key Lifecycle Manager Basic Edition Install License + SW Subscription & 5 Years Of Support
SKLM For Raw Decimal Terabyte Storage		
7S0A007HWW	S876	IBM Security Key Lifecycle Manager For Raw Decimal Terabyte Storage Resource Value Unit License + SW Subscription & Support 12 Months
7S0A008YWW	SDJU	IBM Security Key Lifecycle Manager For Raw Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 3 Years Of Support

Part number	Feature	Description
7S0A008ZWW	SDJV	IBM Security Key Lifecycle Manager For Raw Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 4 Years Of Support
7S0A0090WW	SDJW	IBM Security Key Lifecycle Manager For Raw Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 5 Years Of Support
SKLM For Raw Decimal Petabyte Storage		
7S0A007KWW	S878	IBM Security Key Lifecycle Manager For Raw Decimal Petabyte Storage Resource Value Unit License + SW Subscription & Support 12 Months
7S0A0091WW	SDJX	IBM Security Key Lifecycle Manager For Raw Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 3 Years Of Support
7S0A0092WW	SDJY	IBM Security Key Lifecycle Manager For Raw Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 4 Years Of Support
7S0A0093WW	SDJZ	IBM Security Key Lifecycle Manager For Raw Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 5 Years Of Support
SKLM For Usable Decimal Terabyte Storage		
7S0A007MWW	S87A	IBM Security Key Lifecycle Manager For Usable Decimal Terabyte Storage Resource Value Unit License + SW Subscription & Support 12 Months
7S0A0094WW	SDK0	IBM Security Key Lifecycle Manager For Usable Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 3 Years In Support
7S0A0095WW	SDK1	IBM Security Key Lifecycle Manager For Usable Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 4 Years In Support
7S0A0096WW	SDK2	IBM Security Key Lifecycle Manager For Usable Decimal Terabyte Storage Resource Value Unit License + SW Subscription & 5 Years In Support
SKLM For Usable Decimal Petabyte Storage		
7S0A007PWW	S87C	IBM Security Key Lifecycle Manager For Usable Decimal Petabyte Storage Resource Value Unit License + SW Subscription & Support 12 Months
7S0A0097WW	SDK3	IBM Security Key Lifecycle Manager For Usable Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 3 Years Of Support
7S0A0098WW	SDK4	IBM Security Key Lifecycle Manager For Usable Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 4 Years Of Support
7S0A0099WW	SDK5	IBM Security Key Lifecycle Manager For Usable Decimal Petabyte Storage Resource Value Unit License + SW Subscription & 5 Years Of Support

Controllers for internal storage

The SR650a V4 offers a variety of controller options for internal drives:

- For 2.5-inch drives:
 - RAID adapters and HBAs for SAS/SATA drives (PCIe slot-based)
 - RAID adapters and HBAs for SAS/SATA drives (cabled in a dedicated space)
 - Onboard NVMe ports with RAID support using Intel VROC NVMe RAID
 - Tri-Mode support using RAID 940 adapters for NVMe drives, with RAID provided by the RAID adapter
- For E3.S EDSFF drives:
 - Onboard NVMe ports with RAID support using Intel VROC NVMe RAID
- For M.2 drives (see [M.2 drives](#) section)
 - SATA controller integrated on the M.2 adapters
 - NVMe controller integrated on the M.2 adapters (Intel VROC for RAID)

As well as supporting RAID adapters and HBAs that install in a PCIe slot, the SR650a V4 with 2.5-inch front drive bays supports a custom form factor (CFF) adapter that is mounted in the server and cabled to one of the onboard NVMe ports.

The following table lists the adapters used for the internal storage of the server. For VROC ordering information, see the [Intel VROC](#) section.

No Onboard SATA support: The processors in the SR650a V4 do not offer onboard SATA support. For SATA drives, you will need either a RAID adapter or an HBA.

Table 25. Storage controller support for internal drives

Part number	Feature code	Description	Max Qty	Slots	Supercap
Onboard NVMe - PCIe 5.0 - RAID using Intel VROC .					
CTO only	BC4V	Non RAID NVMe	1	None	No
SAS HBA - PCIe 3.0					
4Y37A72481	BJHJ	ThinkSystem 4350-16i SAS/SATA 12Gb HBA	2	1-10	No
SAS HBA - PCIe 4.0					
4Y37A78602	BM50	ThinkSystem 440-16i SAS/SATA PCIe Gen4 12Gb HBA	2	1-10	No
4Y37A09725	B8P1	ThinkSystem 440-16i SAS/SATA PCIe Gen4 12Gb Internal HBA	1	CFF*	No
SAS Expander					
4Y37A09736	B8P6	ThinkSystem 48 port 12Gb Internal Expander	1	CFF*	No
RAID Adapter - PCIe 3.0					
4Y37A72482	BJHK	ThinkSystem RAID 5350-8i PCIe 12Gb Adapter	3	1-10	No
4Y37A72483	BJHL	ThinkSystem RAID 9350-8i 2GB Flash PCIe 12Gb Adapter	3	1-10	Included
4Y37A72485	BJHN	ThinkSystem RAID 9350-16i 4GB Flash PCIe 12Gb Adapter	2	1-10	Included
RAID Adapter - PCIe 4.0					
4Y37A93012	C0TU	ThinkSystem RAID 545-8i PCIe Gen4 12Gb Adapter	3	1-10	No
4Y37A09728	B8NY	ThinkSystem RAID 940-8i 4GB Flash PCIe Gen4 12Gb Adapter	3	1-10	Included
4Y37A09730	B8NZ	ThinkSystem RAID 940-16i 8GB Flash PCIe Gen4 12Gb Adapter	2	1-10	Included
4Y37A09735	B8P0	ThinkSystem RAID 940-16i 8GB Flash PCIe Gen4 12Gb Internal Adapter	1	CFF*	Included
NVMe (Tri-Mode support)					
4Y37A09728†	BGM1	ThinkSystem RAID 940-8i 4GB Flash PCIe Gen4 12Gb Adapter for U.3	3	1-10	Included
4Y37A09730†	BDY4	ThinkSystem Raid 940-16i 8GB Flash PCIe Gen4 12Gb Adapter for U.3	1	1-10	Included
4Y37A09735†	BGM2	ThinkSystem RAID 940-16i 8GB Flash PCIe Gen4 12Gb Internal Adapter for U.3	1	CFF*	Included

* CFF (custom form factor) is the name for the cabled internal adapter form factor that doesn't occupy a standard PCIe slot

† with Tri-Mode enabled, the adapter supports PCIe 4.0 x1 connectivity to NVMe drives with U.3 interface

Configuration notes:

- **Supercap support limits the number of RAID adapters installable** : The table lists whether the

adapter includes a power module (supercap) to power the flash memory. The server supports between 1 and 3 supercaps depending on the server configuration as described in the [RAID flash power module \(supercap\) support](#) section. The number of supercaps supported also determines the maximum number of RAID adapters with flash that can be installed in the server.

- **Field upgrades:** If you are adding a RAID adapter with supercap to the server as a field upgrade, you may need a supercap holder as described in the [RAID flash power module \(supercap\) support](#) section.

The onboard NVMe support has the following features:

- Support integrated into the Intel processor
- Each drive has PCIe 5.0 x4 host interface
- Supports JBOD
- Supports RAID using Intel VROC

For specifications about the RAID adapters and HBAs supported by the SR650a V4, see the ThinkSystem RAID Adapter and HBA Comparison, available from:

<https://lenovopress.com/lp1288-lenovo-thinksystem-raid-adapter-and-hba-reference#sr650a-v4-support=SR650a%2520V4>

For details about these adapters, see the relevant product guide:

- SAS HBAs: <https://lenovopress.com/servers/options/hba>
- RAID adapters: <https://lenovopress.com/servers/options/raid>

RAID 940 Tri-Mode support

The RAID 940-8i and RAID 940-16i adapters also support NVMe through a feature named Tri-Mode support (or Trimode support). This feature enables the use of NVMe U.3 drives at the same time as SAS and SATA drives. Tri-Mode requires an AnyBay backplane. Cabling of the controller to the backplanes is the same as with SAS/SATA drives, and the NVMe drives are connected via a PCIe x1 link to the controller.

NVMe drives connected using Tri-Mode support provide better performance than SAS or SATA drives: A SATA SSD has a data rate of 6Gbps, a SAS SSD has a data rate of 12Gbps, whereas an NVMe U.3 Gen 4 SSD with a PCIe x1 link will have a data rate of 16Gbps. NVMe drives typically also have lower latency and higher IOPS compared to SAS and SATA drives. Tri-Mode is supported with U.3 NVMe drives and requires an AnyBay backplane.

Tri-Mode requires U.3 drives: Only NVMe drives with a U.3 interface are supported. U.2 drives are not supported. See the [Internal drive options](#) section for the U.3 drives supported by the server.

Intel VROC onboard RAID

Intel VROC (Virtual RAID on CPU) is a feature of the Intel processor that enables Integrated RAID support.

On the SR650a V4, Intel VROC provides RAID functions for the onboard NVMe controller (Intel VROC NVMe RAID).

VROC NVMe RAID offers RAID support for any NVMe drives directly connected to the ports on the server's system board or via adapters such as NVMe retimers or NVMe switch adapters. On the SR650a V4, RAID levels implemented are based on the VROC feature selected as indicated in the following table. RAID 1 is limited to 2 drives per array, and RAID 10 is limited to 4 drives per array. Hot-spare functionality is also supported.

Performance tip: For best performance with VROC NVMe RAID, the drives in an array should all be connected to the same processor. Spanning processors is possible however performance will be unpredictable and should be evaluated based on your workload.

The SR650a V4 supports the VROC NVMe RAID offerings listed in the following table.

Table 26. Intel VROC NVMe RAID ordering information and feature support

Part number	Feature code	Description	Intel NVMe SSDs	Non-Intel NVMe SSDs	RAID 0	RAID 1	RAID 10	RAID 5
4L47A92670	BZ4W	Intel VROC RAID1 Only	Yes	Yes	No	Yes	No	No
4L47A83669	BR9B	Intel VROC (VMD NVMe RAID) Standard	Yes	Yes	Yes	Yes	Yes	No
4L47A39164	B96G	Intel VROC (VMD NVMe RAID) Premium	Yes	Yes	Yes	Yes	Yes	Yes

Configuration notes:

- If a feature code is ordered in a CTO build, the VROC functionality is enabled in the factory. For field upgrades, order a part number and it will be fulfilled as a Feature on Demand (FoD) license which can then be activated via the XCC management processor user interface.
- Intel VROC NVMe is supported on all Intel Xeon Scalable processors

Virtualization support: Virtualization support for Intel VROC is as follows:

- **VROC (VMD) NVMe RAID :** VROC (VMD) NVMe RAID is supported by ESXi, KVM, Xen, and Hyper-V. ESXi support is limited to RAID 1 only; other RAID levels are not supported. Windows and Linux OSes support VROC RAID NVMe, both for host boot functions and for guest OS function, and RAID-0, 1, 5, and 10 are supported. On ESXi, VROC is supported with both boot and data drives.

Internal drive options

The following tables list the drive options for internal storage of the server.

2.5-inch hot-swap drives:

- [2.5-inch hot-swap 12 Gb SAS HDDs](#)
- [2.5-inch hot-swap 24 Gb SAS SSDs](#)
- [2.5-inch hot-swap 6 Gb SATA SSDs](#)
- [2.5-inch hot-swap PCIe 5.0 NVMe SSDs](#)
- [2.5-inch hot-swap PCIe 4.0 NVMe SSDs](#)

EDSFF hot-swap drives:

- [E3.S 1T EDSFF hot-swap PCIe 5.0 NVMe SSDs](#)

M.2 drives:

- [M.2 SATA drives](#)
- [M.2 PCIe 4.0 NVMe drives](#)

M.2 drive support: The use of M.2 drives requires an additional adapter as described in the [M.2 drives](#) subsection.

SED support: The tables include a column to indicate which drives support SED encryption. The encryption functionality can be disabled if needed. Note: Not all SED-enabled drives have "SED" in the description.

Table 27. 2.5-inch hot-swap 12 Gb SAS HDDs

Part number	Feature code	Description	SED support	Max Qty
2.5-inch hot-swap HDDs - 12 Gb SAS 10K				
7XB7A00025	AULZ	ThinkSystem 2.5" 600GB 10K SAS 12Gb Hot Swap 512n HDD	No	8
7XB7A00027	AUM1	ThinkSystem 2.5" 1.2TB 10K SAS 12Gb Hot Swap 512n HDD	No	8
4XB7A83970	BRG7	ThinkSystem 2.5" 2.4TB 10K SAS 12Gb Hot Swap 512e HDD v2	No	8

Table 28. 2.5-inch hot-swap 24 Gb SAS SSDs

Part number	Feature code	Description	SED support	Max Qty
2.5-inch hot-swap SSDs - 24 Gb SAS - Mixed Use/Mainstream (3-5 DWPD)				
4XB7A80340	BNW8	ThinkSystem 2.5" PM1655 800GB Mixed Use SAS 24Gb HS SSD	Support	8
4XB7A80341	BNW9	ThinkSystem 2.5" PM1655 1.6TB Mixed Use SAS 24Gb HS SSD	Support	8
4XB7A80342	BNW6	ThinkSystem 2.5" PM1655 3.2TB Mixed Use SAS 24Gb HS SSD	Support	8
4XB7A80343	BP3K	ThinkSystem 2.5" PM1655 6.4TB Mixed Use SAS 24Gb HS SSD	Support	8
2.5-inch hot-swap SSDs - 24 Gb SAS - Read Intensive/Entry/Capacity (<3 DWPD)				
4XB7A80318	BNWC	ThinkSystem 2.5" PM1653 960GB Read Intensive SAS 24Gb HS SSD	Support	8
4XB7A80319	BNWE	ThinkSystem 2.5" PM1653 1.92TB Read Intensive SAS 24Gb HS SSD	Support	8
4XB7A80320	BNWF	ThinkSystem 2.5" PM1653 3.84TB Read Intensive SAS 24Gb HS SSD	Support	8
4XB7A80321	BP3E	ThinkSystem 2.5" PM1653 7.68TB Read Intensive SAS 24Gb HS SSD	Support	8
4XB7A80322	BP3J	ThinkSystem 2.5" PM1653 15.36TB Read Intensive SAS 24Gb HS SSD	Support	8
4XB7A80323	BP3D	ThinkSystem 2.5" PM1653 30.72TB Read Intensive SAS 24Gb HS SSD	Support	8

Table 29. 2.5-inch hot-swap 6 Gb SATA SSDs

Part number	Feature code	Description	SED support	Max Qty
2.5-inch hot-swap SSDs - 6 Gb SATA - Mixed Use/Mainstream (3-5 DWPD)				
4XB7A93091	C1X3	ThinkSystem 2.5" PM897a 480GB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A93092	C1X4	ThinkSystem 2.5" PM897a 960GB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A93093	C1X5	ThinkSystem 2.5" PM897a 1.92TB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A93094	C1X6	ThinkSystem 2.5" PM897a 3.84TB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A90884	BYM2	ThinkSystem 2.5" VA 480GB Mixed Use SATA 6Gb HS SSD v2	No	8
4XB7A90885	BYM4	ThinkSystem 2.5" VA 960GB Mixed Use SATA 6Gb HS SSD v2	No	8
4XB7A90886	BYM5	ThinkSystem 2.5" VA 1.92TB Mixed Use SATA 6Gb HS SSD v2	No	8
4XB7A90887	BYM6	ThinkSystem 2.5" VA 3.84TB Mixed Use SATA 6Gb HS SSD v2	No	8
4XB7A82289	BQ21	ThinkSystem 2.5" 5400 MAX 480GB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A82290	BQ24	ThinkSystem 2.5" 5400 MAX 960GB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A82291	BQ22	ThinkSystem 2.5" 5400 MAX 1.92TB Mixed Use SATA 6Gb HS SSD	Support	8
4XB7A82292	BQ23	ThinkSystem 2.5" 5400 MAX 3.84TB Mixed Use SATA 6Gb HS SSD	Support	8
2.5-inch hot-swap SSDs - 6 Gb SATA - Read Intensive/Entry (<3 DWPD)				
4XB7A90872	BYLQ	ThinkSystem 2.5" VA 240GB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A90873	BYLR	ThinkSystem 2.5" VA 480GB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A90874	BYLS	ThinkSystem 2.5" VA 960GB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A90875	BYLT	ThinkSystem 2.5" VA 1.92TB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A90876	BYLU	ThinkSystem 2.5" VA 3.84TB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A90877	BYLV	ThinkSystem 2.5" VA 7.68TB Read Intensive SATA 6Gb HS SSD v2	No	8
4XB7A87524	BWKN	ThinkSystem 2.5" PM893a 480GB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A87525	BWKM	ThinkSystem 2.5" PM893a 960GB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A87526	BWKL	ThinkSystem 2.5" PM893a 1.92TB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A87527	BWKK	ThinkSystem 2.5" PM893a 3.84TB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A82258	BQ1Q	ThinkSystem 2.5" 5400 PRO 240GB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A82260	BQ1R	ThinkSystem 2.5" 5400 PRO 960GB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A82261	BQ1X	ThinkSystem 2.5" 5400 PRO 1.92TB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A82262	BQ1S	ThinkSystem 2.5" 5400 PRO 3.84TB Read Intensive SATA 6Gb HS SSD	Support	8
4XB7A82263	BQ1T	ThinkSystem 2.5" 5400 PRO 7.68TB Read Intensive SATA 6Gb HS SSD	Support	8

Table 30. 2.5-inch hot-swap PCIe 5.0 NVMe SSDs

Part number	Feature code	Description	SED support	Max Qty
2.5-inch SSDs - U.2 PCIe 5.0 NVMe - Mixed Use/Mainstream (3-5 DWPD)				
4XB7A93097	C1WM	ThinkSystem 2.5" U.2 PM9D5a 800GB Mixed Use NVMe NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93098	C1WN	ThinkSystem 2.5" U.2 PM9D5a 1.6TB Mixed Use NVMe NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93099	C1WP	ThinkSystem 2.5" U.2 PM9D5a 3.2TB Mixed Use NVMe NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93100	C1WR	ThinkSystem 2.5" U.2 PM9D5a 6.4TB Mixed Use NVMe NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93101	C1WQ	ThinkSystem 2.5" U.2 PM9D5a 12.8TB Mixed Use NVMe NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93127	C0ZR	ThinkSystem 2.5" U.2 VA 1.6TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93128	C0ZQ	ThinkSystem 2.5" U.2 VA 3.2TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93129	C0ZP	ThinkSystem 2.5" U.2 VA 6.4TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93130	C0ZN	ThinkSystem 2.5" U.2 VA 12.8TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
2.5-inch SSDs - U.2 PCIe 5.0 NVMe - Read Intensive/Entry (<3 DWPD)				
4XB7A93066	C0GK	ThinkSystem 2.5" U.2 PM9D3a 960GB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93067	C0GL	ThinkSystem 2.5" U.2 PM9D3a 1.92TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93068	C0GN	ThinkSystem 2.5" U.2 PM9D3a 3.84TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93069	C0GP	ThinkSystem 2.5" U.2 PM9D3a 7.68TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93095	C1WL	ThinkSystem 2.5" U.2 PM9D3a 15.36TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93122	C0ZV	ThinkSystem 2.5" U.2 VA 1.92TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93123	C0ZU	ThinkSystem 2.5" U.2 VA 3.84TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93124	C0ZT	ThinkSystem 2.5" U.2 VA 7.68TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93125	C0ZS	ThinkSystem 2.5" U.2 VA 15.36TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8

Table 31. 2.5-inch hot-swap PCIe 4.0 NVMe SSDs

Part number	Feature code	Description	SED support	Max Qty
2.5-inch SSDs - U.3 PCIe 4.0 NVMe - Mixed Use/Mainstream (3-5 DWPD)				
4XB7A95054	C2BG	ThinkSystem 2.5" U.3 7500 MAX 800GB Mixed Use NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95055	C2BV	ThinkSystem 2.5" U.3 7500 MAX 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95056	C2BW	ThinkSystem 2.5" U.3 7500 MAX 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95057	C2BF	ThinkSystem 2.5" U.3 7500 MAX 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95058	C2BX	ThinkSystem 2.5" U.3 7500 MAX 12.8TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	Support	8
2.5-inch SSDs - U.2 PCIe 4.0 NVMe - Read Intensive/Entry (<3 DWPD)				
4XB7B01867	C6MA	ThinkSystem 2.5" U.2 Solidigm P5520 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7B01868	C6MB	ThinkSystem 2.5" U.2 Solidigm P5520 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7B01869	C6MC	ThinkSystem 2.5" U.2 Solidigm P5520 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7B01870	C7NZ	ThinkSystem 2.5" U.2 Solidigm P5520 15.36TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A93075	C1WJ	ThinkSystem 2.5" U.2 P5336 30.72TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A93076	C1WK	ThinkSystem 2.5" U.2 P5336 61.44TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
2.5-inch SSDs - U.3 PCIe 4.0 NVMe - Read Intensive/Entry (<3 DWPD)				
4XB7A95049	C2BY	ThinkSystem 2.5" U.3 7500 PRO 960GB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95050	C2BR	ThinkSystem 2.5" U.3 7500 PRO 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95051	C2BS	ThinkSystem 2.5" U.3 7500 PRO 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95052	C2BT	ThinkSystem 2.5" U.3 7500 PRO 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8
4XB7A95053	C2BU	ThinkSystem 2.5" U.3 7500 PRO 15.36TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	Support	8

Table 32. E3.S 1T EDSFF hot-swap PCIe 5.0 NVMe SSDs

Part number	Feature code	Description	SED support	Max Qty
E3.S hot-swap SSDs - PCIe 5.0 NVMe - Mixed Use/Mainstream (3-5 DWPD)				
4XB7A95510	C3P7	ThinkSystem E3.S CD8P 1.6TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A95511	C3P8	ThinkSystem E3.S CD8P 3.2TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A95512	C3P9	ThinkSystem E3.S CD8P 6.4TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A95513	C3PA	ThinkSystem E3.S CD8P 12.8TB Mixed Use NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93136	C1WD	ThinkSystem E3.S 1T VA 1.6TB Mixed Use NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93137	C1WE	ThinkSystem E3.S 1T VA 3.2TB Mixed Use NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93138	C1WF	ThinkSystem E3.S 1T VA 6.4TB Mixed Use NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93139	C1WG	ThinkSystem E3.S 1T VA 12.8TB Mixed Use NVMe PCIe 5.0 x4 HS SSD v2	Support	8
E3.S hot-swap SSDs - PCIe 5.0 NVMe - Read Intensive/Entry (<3 DWPD)				
4XB7A93132	C1W9	ThinkSystem E3.S 1T VA 3.84TB Read Intensive NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93133	C1WA	ThinkSystem E3.S 1T VA 7.68TB Read Intensive NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93134	C1WB	ThinkSystem E3.S 1T VA 15.36TB Read Intensive NVMe PCIe 5.0 x4 HS SSD v2	Support	8
4XB7A93080	C1AB	ThinkSystem E3.S PM9D3a 7.68TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93810	C0R2	ThinkSystem E3.S CD8P 1.92TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93811	C0R3	ThinkSystem E3.S CD8P 3.84TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93812	C0R4	ThinkSystem E3.S CD8P 7.68TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8
4XB7A93813	C0R5	ThinkSystem E3.S CD8P 15.36TB Read Intensive NVMe PCIe 5.0 x4 HS SSD	Support	8

Table 33. M.2 SATA drives

Part number	Feature code	Description	SED support	Max Qty
M.2 SSDs - 6 Gb SATA - Read Intensive/Entry (<3 DWPD)				
4XB7A89422	BYF7	ThinkSystem M.2 ER3 240GB Read Intensive SATA 6Gb NHS SSD	Support	2
4XB7A90049	BYF8	ThinkSystem M.2 ER3 480GB Read Intensive SATA 6Gb NHS SSD	Support	2
4XB7A90230	BYF9	ThinkSystem M.2 ER3 960GB Read Intensive SATA 6Gb NHS SSD	Support	2
4XB7A82286	BQ1Z	ThinkSystem M.2 5400 PRO 240GB Read Intensive SATA 6Gb NHS SSD	Support	2
4XB7A82287	BQ1Y	ThinkSystem M.2 5400 PRO 480GB Read Intensive SATA 6Gb NHS SSD	Support	2
4XB7A82288	BQ20	ThinkSystem M.2 5400 PRO 960GB Read Intensive SATA 6Gb NHS SSD	Support	2

Table 34. M.2 PCIe 4.0 NVMe drives

Part number	Feature code	Description	SED support	Max Qty
M.2 SSDs - PCIe 4.0 NVMe - Read Intensive/Entry (<3 DWPD)				
4XB7A82636	BS2P	ThinkSystem M.2 7450 PRO 480GB Read Intensive NVMe PCIe 4.0 x4 NHS SSD	Support	2
4XB7A13999	BKSR	ThinkSystem M.2 7450 PRO 960GB Read Intensive NVMe PCIe 4.0 x4 NHS SSD	Support	2

USB flash drive

For general portable storage needs, the server also supports the USB flash drive option that is listed in the following table.

Table 35. USB memory key

Part number	Feature	Description
4X77A95465	C44Q	ThinkSystem USB 64GB USB 3.0 Flash Drive

Internal backup units

The server does not support any internal backup units, such as tape drives or RDX drives. External backup units are available as described in the [External backup units](#) section.

Optical drives

The server supports the external USB optical drive listed in the following table.

Table 36. External optical drive

Part number	Feature code	Description
7XA7A05926	AVV8	ThinkSystem External USB DVD RW Optical Disk Drive

The drive is based on the Lenovo Slim DVD Burner DB65 drive and supports the following formats: DVD-RAM, DVD-RW, DVD+RW, DVD+R, DVD-R, DVD-ROM, DVD-R DL, CD-RW, CD-R, CD-ROM.

I/O expansion

The SR650a V4 supports a total of 14x PCIe slots plus 2x OCP slots:

- 8x PCIe slots at the front for GPUs (8x single-wide GPUs or 4x double-wide GPUs)
- 6x PCIe slots at the rear of the server
- 2x OCP slots at the rear of the server

Internal (CFF) RAID adapter/HBA : For configurations with 2.5-inch front drive bays, an internal RAID adapter or HBA (also known as CFF or custom form factor) can be installed in a dedicated space and cabled to a PCIe 4.0 x8 connector, thereby freeing up a slot for other purposes. E3.S configurations do not support a RAID adapter.

Topics in this section:

- [Front slots](#)
- [Rear slots](#)
- [Slot ordering information](#)
- [Rear slot configurations](#)
- [Slot field upgrades](#)
- [OCP slot filler](#)
- [Serial port](#)

Front slots

The SR650a V4 offers front slots for the use of GPUs, either 4x double-wide GPUs or up to 8x single-wide. The following figure shows the locations of the front-accessible slots.

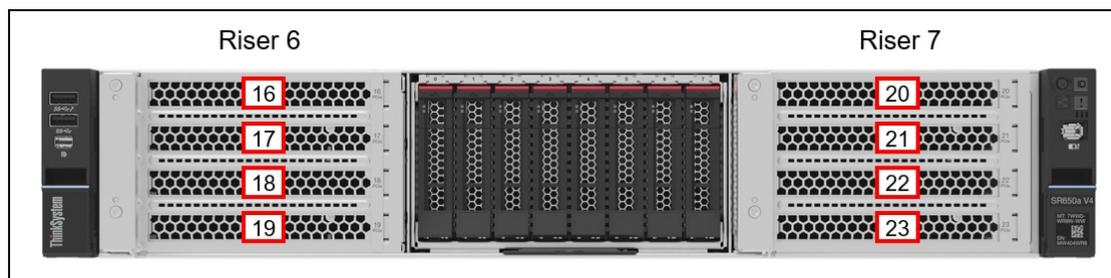


Figure 16. SR650a V4 front slots

The supported slot and riser card combinations are as follows:

- With 1 CPU installed:
 - Two x16 slots in Riser 7 (slots 21, 23)
 - Four x8 slots in Riser 7 only (slots 20, 21, 22, 23)
- With 2 CPUs installed:
 - Four x16 slots in Riser 6 (slots 17, 19) and Riser 7 (slots 21, 23)
 - Eight x8 slots in Riser 6 and Riser 7 (all slots)
 - Four x8 slots in Riser 6 (slots 16, 18) and Riser 7 (slots 20, 22)

Configuration notes:

- Both Riser 6 and Riser 7 must have slots configured, even in 1-processor configurations where only Riser 7 is used.

Rear slots

The following figure shows the locations of the rear-accessible slots. The rear OCP slots are located below the PCIe slots. All slots are PCIe Gen 5.

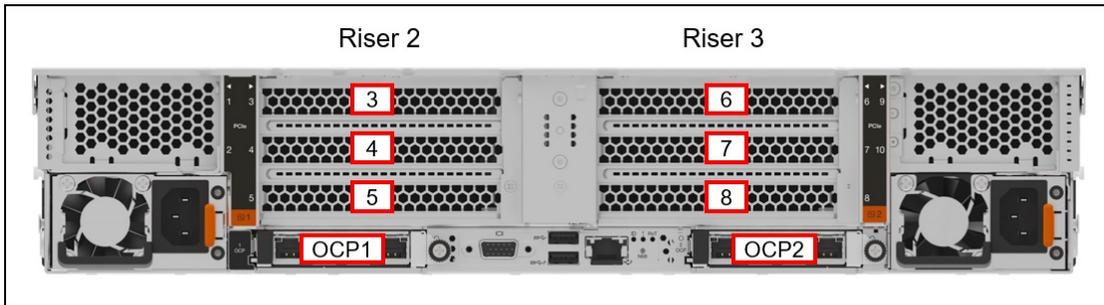


Figure 17. SR650a V4 rear slots

Note: Riser 1 and Riser 4 are not available for use in the SR650a V4.

The supported slot and riser card combinations listed in the [Rear slot configurations](#) section.

All x8 slots are open-ended slots, which means they can physically support x16 adapters even though only 8 lanes (x8) will be connected.

In addition, the server has two OCP slots:

- OCP1 (connects to CPU 1)
 - Choice 1: x8
 - Choice 2: x16 (requires ThinkSystem SR650 V4/SR630 V4 x16 OCP Cable Kit, feature C1YK)
- OCP2 (connects to CPU 2)
 - Choice 1: x8
 - Choice 2: x16 (requires ThinkSystem SR650 V4/SR630 V4 x16 OCP Cable Kit, feature C1YK)

Slot 8 can instead be configured as a pair of hot-swap M.2 drives. Combinations are shown in the following figure.

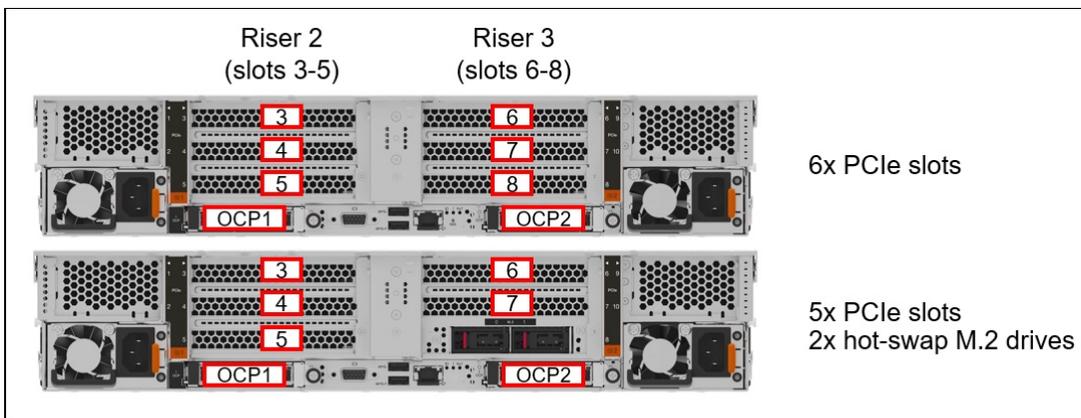


Figure 18. PCIe slot combinations

Slot ordering information

In the SR650a V4, rear slots are configured one slot at a time, based on customer need for PCIe slots. This is different to prior generations, where slots were configured at the complete riser level, not the slot level.

The [DCSC configurator](#) includes a new slot configuration wizard which will automate the selection of slots and riser cages, based on the adapters and rear drive bays selected. The wizard includes a visual representation of where each adapter is to be placed.

The SR650a V4 uses a modular riser card design for rear Riser 2 and Riser 3, in that risers start with only 1 slot (slot 5 or slot 8) and can be configured with additional slots as needed. Additional slots can be configured CTO and built in the factory, or can be added as field upgrades after delivery. Slots 5 and 8 are connected to riser slots on the system board. The other slots (slots 4 & 3 for Riser 2 and slots 7 & 6 for Riser 3) are connected via cables to additional PCIe connectors on the system board.

Tip: For Riser 2 and Riser 3, you do not need to select the lower slots before selecting upper slots. For example, you can select slots for Slot 3 and Slot 4, but leave Slot 5 empty.

The following table lists the ordering information for the rear slots.

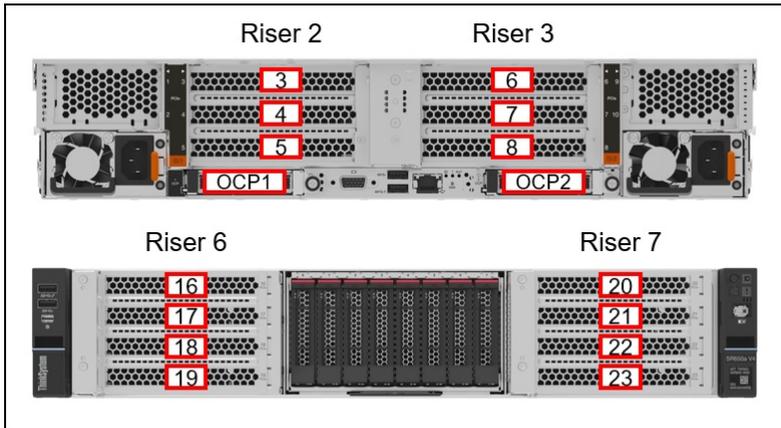


Figure 19. SR650a V4 rear and front slots

Table 37. Ordering information for slots

Part number	Feature	Description of feature code	Purpose
Front - Riser 6 (slots 16, 17, 18, 19)			
CTO only	C3S1	ThinkSystem SR650a V4 2U F AC GPU Riser Cage	Cage for Riser 6 or 7
4X97B02320	C3R6	ThinkSystem SR650a V4 x8 Front Riser Slot 16	Riser for Slot 16, x8
4X97B02320	C4UG	ThinkSystem SR650a V4 x8 Front Riser Slot 17	Riser for Slot 17, x8
4XH7B05001	C21K	ThinkSystem SR650a V4 x8 Front Riser Slot 18	Riser for Slot 18, x8
4XH7B05001	C4UD	ThinkSystem SR650a V4 x8 Front Riser Slot 19	Riser for Slot 19, x8
4X97B02321	C4U4	ThinkSystem SR650a V4 x16 Front Riser Slot 17	Riser for Slot 17, x16
4X97B02321	C4U3	ThinkSystem SR650a V4 x16 Front Riser Slot 19	Riser for Slot 19, x16
Front - Riser 7 (slots 20, 21, 22, 23)			
CTO only	C3S1	ThinkSystem SR650a V4 2U F AC GPU Riser Cage	Cage for Riser 6 or 7
4X97B02320	C4UF	ThinkSystem SR650a V4 x8 Front Riser Slot 20	Riser for Slot 20, x8
4X97B02320	C4UE	ThinkSystem SR650a V4 x8 Front Riser Slot 21	Riser for Slot 21, x8
4XH7B05001	C4UC	ThinkSystem SR650a V4 x8 Front Riser Slot 22	Riser for Slot 22, x8
4XH7B05001	C4UB	ThinkSystem SR650a V4 x8 Front Riser Slot 23	Riser for Slot 23, x8
4X97B02321	C4U2	ThinkSystem SR650a V4 x16 Front Riser Slot 21	Riser for Slot 21, x16
4X97B02321	C4U1	ThinkSystem SR650a V4 x16 Front Riser Slot 23	Riser for Slot 23, x16
Rear - Riser 2 (slots 3, 4, 5)			

Part number	Feature	Description of feature code	Purpose
4XH7B03839	C3S5	ThinkSystem 2U V4 3FH Riser Cage	Cage for Riser 2 or 3
4X97B02316	C3R4	ThinkSystem SR650/a V4 x8 Rear Riser Slot 3	Riser for Slot 3, x8
4X97B02319	C3R8	ThinkSystem SR650/a V4 x16 Rear Riser Slot 3	Riser for Slot 3, x16
4X97B02318	C3R3	ThinkSystem SR650/a V4 x16 Rear Riser Slot 4	Riser for Slot 4, x16, 75W
4X97B02317	C3R7	ThinkSystem SR650/a V4 x16 High Watts Rear Riser Slot 4	Riser for Slot 4, x16, >75W
4XH7B02315	C62D	ThinkSystem SR650/a V4 x16 Rear Direct Riser Slot 5	Riser for Slot 5, 16
Rear - Riser 3 (slots 6, 7, 8)			
4XH7B03839	C3S5	ThinkSystem 2U V4 3FH Riser Cage	Cage for Riser 2 or 3 without drive bays
4XH7B03719	C3S2	ThinkSystem 2U V4 1FH Riser Cage	Cage for Riser 2 or 3 for use with all rear drive bays
4X97B02316	C4TX	ThinkSystem SR650/a V4 x8 Rear Riser Slot 6	Riser for Slot 6, x8
4X97B02319	C4U9	ThinkSystem SR650/a V4 x16 Rear Riser Slot 6	Riser for Slot 6, x16
4X97B02318	C4TV	ThinkSystem SR650/a V4 x16 Rear Riser Slot 7	Riser for Slot 7, x16, 75W
4X97B02317	C4UA	ThinkSystem SR650/a V4 x16 High Watts Rear Riser Slot 7	Riser for Slot 7, x16, >75W
4XH7B02315	C4U0	ThinkSystem SR650/a V4 x16 Rear Direct Riser Slot 8	Riser for Slot 8, 16
OCP cable			
4X97A97300	C1YK	ThinkSystem SR650 V4/SR630 V4 x16 OCP Cable Kit	With this cable, an OCP slot is PCIe x16. Without this cable, the OCP slot is PCIe x8. 1 per OCP slot.

Configuration notes:

- Both Riser 6 and Riser 7 must have slots configured, even in 1-processor configurations where only Riser 7 is used.

Rear slot configurations

The following table lists the rear slot combinations that are supported for each drive configuration. Front slots are always configured, either eight x8 or four x16 slots. The locations of the rear risers and slots is shown in the following figure.

Tip: The configuration numbers match the storage configurations listed in the [Storage configurations](#) section.

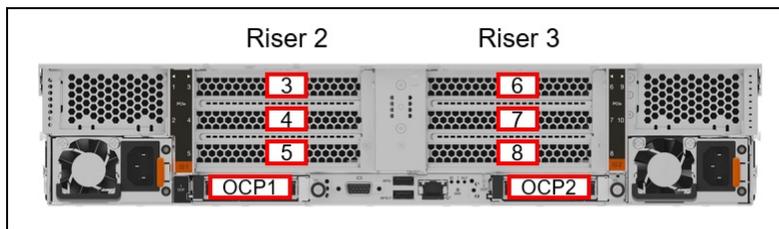


Figure 20. SR650a V4 rear slots

Table 38. Rear slot configurations ("-" means the slot is not available)

Cfg	CPUs	CPU cooling			Front drive bays					PCIe slot count	Riser 2 slots			Riser 3 slots			OCP slots	
		Air cooled	Open loop CPUs	Open loop CPUs+Mem	SAS/SATA	AnyBay	NVMe	E3.S 1T	E3.S 2T		3	4	5	6	7	8	1	2
73-1	1-2	Y	Y	N	8	0	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
73-2	1-2	Y	Y	N	8	0	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
73-3	2	Y	Y	N	8	0	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
73-4	1	Y	Y	N	8	0	0	0	0	2	-	x16	x16	-	-	-	x8*	-
74-1	2	Y	Y	N	0	0	8	0	0	3	x8	-	x16	-	x16	-	x8*	x16
75-1	2	Y	Y	N	0	8	0	0	0	3	x8	-	x16	-	x16	-	x8*	x16
75-2	2	Y	Y	N	0	8	0	0	0	3	x8	-	x16	-	x16	-	x8*	x16
75-3	2	Y	Y	N	0	8	0	0	0	3	x8	-	x16	-	x16	-	x8*	x16
77-1	1-2	Y	Y	N	0	8	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
77-2	2	Y	Y	N	0	8	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
77-3	1	Y	Y	N	0	8	0	0	0	2	-	x16	x16	-	-	-	x8*	-
78-1	2	Y	Y	N	0	0	0	8	0	4	x8	-	x16	x8	-	x16	x8*	x16
78-2	1	Y	Y	N	0	0	0	8	0	1	x8	-	-	-	-	-	-	-
80-1	1-2	Y	Y	N	8	0	0	0	0	6	x8	x16	x16	x8	x16	x16	x8*	x16
80-2	1-2	Y	Y	N	8	0	0	0	0	6	x8	x16	x16	x8	x16	x16	x8*	x16
80-3	2	Y	Y	N	8	0	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
80-4	1	Y	Y	N	8	0	0	0	0	2	-	x16	x16	-	-	-	x8*	-
81-1	2	Y	Y	N	0	0	8	0	0	4	x8	-	x16	x8	x16	-	x8*	x16
82-1	2	Y	Y	N	0	8	0	0	0	4	x8	-	x16	x8	x16	-	x8*	x16
82-2	2	Y	Y	N	0	8	0	0	0	4	x8	-	x16	x8	x16	-	x8*	x16
82-3	2	Y	Y	N	0	8	0	0	0	3	x8	-	x16	-	x16	-	x8*	x16
84-1	1-2	Y	Y	N	0	8	0	0	0	6	x8	x16	x16	x8	x16	x16	x8*	x16
84-2	2	Y	Y	N	0	8	0	0	0	5	x8	x16	x16	-	x16	x16	x8*	x16
84-3	1	Y	Y	N	0	8	0	0	0	2	-	x16	x16	-	-	-	x8*	-
85-1	2	Y	Y	N	0	0	0	8	0	4	x8	-	x16	x8	-	x16	x8*	x16
85-2	1	Y	Y	N	0	0	0	8	0	1	x8	-	-	-	-	-	x8*	-
86-1	1-2	Y	Y	N	0	0	0	4	0	5	x8	-	x16	x8	x16	x16	x8*	x16
111-1	1-2	Y	Y	N	0	0	0	4	0	5	x8	-	x16	x8	x16	x16	x8*	x16

* OCP slot 1 can be configured as x16 if slot 3 is not configured

Slot field upgrades

Slot configurations can also be ordered as field upgrades using option part numbers, as listed in the following table.

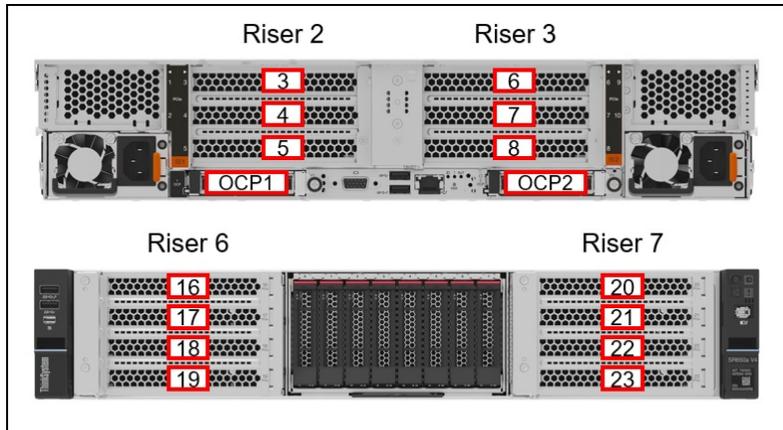


Figure 21. SR650a V4 rear and front slots

Table 39. Slot field upgrades - Rear and front slots

Part number	Description	Contents & purpose	Max Qty
Rear risers (Riser 2 or Riser 3)			
4XH7B03839	ThinkSystem SR650/a V4 Riser Cage for Riser 2 or 3 w/ 3x PCIe Slots installation	Cage for Riser 2 or 3	2
4X97B02316	ThinkSystem SR650/a V4 x8 Gen5 Cable Riser Slot 3 & 6 Option Kit	Riser with x8 slot for Slot 3 or 6, 75W max	2
4X97B02319	ThinkSystem SR650/a V4 x16 Gen5 High Power Cable Riser Slot 3 & 6 Option Kit	Riser with x16 slot for Slot 3 or 6, >75W	2
4X97B02318	ThinkSystem SR650/a V4 x16 Gen5 Cable Riser Slot 4 & 7 Option Kit	Riser with x16 slot for Slot 4 or 7, 75W max	2
4X97B02317	ThinkSystem SR650/a V4 x16 Gen5 High Power Cable Riser Slot 4 & 7 Option Kit	Riser with x16 slot for Slot 4 or 7, >75W	2
4XH7B02315	ThinkSystem SR650/a V4 x16 Gen5 Rigid Riser Slot 5 & 8 Option Kit	Riser with x16 slot for Slot 5 or 8, 75W max	2
Front risers (Riser 6 or Riser 7)			
4X97B02321	ThinkSystem SR650a V4 x16 Gen5 Front High Power Cable Riser Option Kit	Riser with x16 slot for Slot 17, 19, 21, 23	4
4X97B02320	ThinkSystem SR650a V4 x8 Gen5 Front High Power Cable Riser Option Kit	Riser with x8 slot for Slot 16, 17, 20, 21	4
4XH7B05001	ThinkSystem SR650a V4 x8 Gen5 Front High Power Cable Riser for Slot 18/19/22/23 Option Kit	Riser with x8 slot for Slot 18, 19, 22, 23	4
OCP slots			
4X97A97300	ThinkSystem V4 1U/2U OCP x16 Enablement Cable Kit	With this cable, an OCP slot is PCIe x16. Without this cable, the OCP slot is PCIe x8. 1 per OCP slot.	2

OCP slot filler

If customers or partners remove an OCP adapter from the server, we recommend that a slot cover (slot filler) be installed in its place to ensure proper airflow in the server. Ordering information is listed in the following table.

Tip: For CTO orders and preconfigured models, slot fillers are automatically installed in slots where an OCP adapter is not installed.

Table 40. OCP slot filler

Part number	Description
4XF7B06188	ThinkSystem OCP3 FILLER

Serial port

The SR650a V4 optionally supports a RS-232 serial port by adding a COM port bracket to either slot 5 or slot 8.

Ordering information is shown in the following table.

Table 41. Serial port

Part number	Feature code	Description
4X97A97253	C3FB	ThinkSystem V4 1U/2U COM Port Upgrade Kit

The bracket is shown in the following figure. The option part number includes both Low Profile and Full Height brackets.

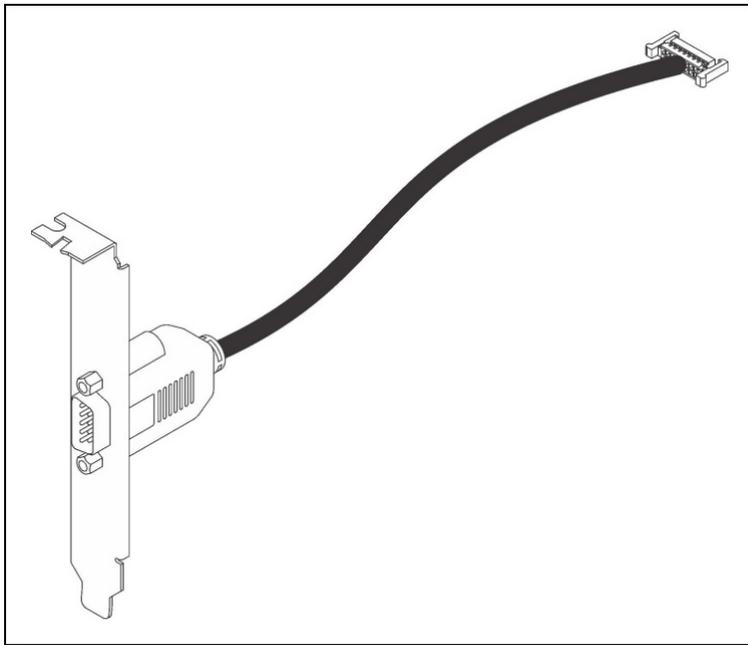


Figure 22. ThinkSystem V4 1U/2U COM Port Upgrade Kit

Network adapters

This section lists the supported network adapters:

- [OCP network adapters](#)
- [PCIe network adapters](#)
- [Adapters with Generic firmware](#)

OCP network adapters

The server has two dedicated OCP 3.0 SFF slots each with either a PCIe x8 or x16 host interface. The OCP slots are both located at the rear of the server. See [Figure 3](#) for the location of the OCP slots.

The following table lists the supported OCP adapters. One port can optionally be shared with the XCC management processor for Wake-on-LAN and NC-SI support.

Table 42. Supported OCP adapters

Part number	Feature code	Description	Maximum supported	PCIe width
Gigabit Ethernet				
4XC7A08235	B5T1	ThinkSystem Broadcom 5719 1GbE RJ45 4-port OCP Ethernet Adapter	2	PCIe x4
4XC7A96731	C4HR	ThinkSystem Intel E610-T4 1GBase-T 4-Port OCP Ethernet Adapter(Generic FW)*	2	PCIe x4
10 Gb Ethernet - 10GBASE-T				
4XC7A95696	C4GB	ThinkSystem Broadcom 57412 10GBase-T 4-Port OCP Ethernet Adapter	2	PCIe x8
4XC7A08236	B5ST	ThinkSystem Broadcom 57416 10GBASE-T 2-port OCP Ethernet Adapter	2	PCIe x8
4XC7A96732	C4HS	ThinkSystem Intel E610-T2 10GBase-T 2-Port OCP Ethernet Adapter(Generic FW)*	2	PCIe x8
4XC7A96734	C4HU	ThinkSystem Intel E610-T4 10GBase-T 4-Port OCP Ethernet Adapter(Generic FW)*	2	PCIe x8
25 Gb Ethernet				
4XC7A08237	BN2T	ThinkSystem Broadcom 57414 10/25GbE SFP28 2-Port OCP Ethernet Adapter	2	PCIe x8
4XC7A80567	BPPW	ThinkSystem Broadcom 57504 10/25GbE SFP28 4-Port OCP Ethernet Adapter	2	PCIe x16†
4XC7A62582	BE4T	ThinkSystem Mellanox ConnectX-6 Lx 10/25GbE SFP28 2-port OCP Ethernet Adapter	2	PCIe x8
100 Gb Ethernet				
4XC7A08243	BPPX	ThinkSystem Broadcom 57508 100GbE QSFP56 2-Port OCP Ethernet Adapter	2	PCIe x16†
4XC7A99190	C62H	ThinkSystem Nvidia ConnectX-6 Dx 100GbE QSFP56 2-port OCP Ethernet Adapter(Generic)*	2	PCIe x16†
400 Gb Ethernet				
4XC7A95695	C4CQ	ThinkSystem Broadcom 57608 2x200/1x400GbE QSFP112 OCP Ethernet Adapter(Generic FW)*	2	PCIe x16†

* See the [Adapters with Generic firmware](#) section

† OCP x16 enablement cable required; see below

The table above indicates the PCIe width of host interface for each adapter. All adapters with a PCIe x16 interface will require that the OCP slots have a x16 connection, using the cable kit listed in the following table.

Table 43. ThinkSystem V4 1U/2U OCP x16 Enablement Cable Kit

Part number	Feature code	Description
4X97A97300	C1YK	ThinkSystem V4 1U/2U OCP x16 Enablement Cable Kit

PCIe network adapters

The following table lists additional supported network adapters that can be installed in the regular PCIe slots.

Table 44. Supported PCIe Network Adapters

Part number	Feature code	Description	Maximum supported	Slots	PCIe width
Gigabit Ethernet					
7ZT7A00484	AUZV	ThinkSystem Broadcom 5719 1GbE RJ45 4-Port PCIe Ethernet Adapter	6	3-8	PCIe x8
10 Gb Ethernet - 10GBASE-T					
4XC7A95697	C4GC	ThinkSystem Broadcom 57412 10GBase-T 4-Port PCIe Ethernet Adapter	6	3-8	PCIe x8
7ZT7A00496	AUKP	ThinkSystem Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter	6	3-8	PCIe x8
25 Gb Ethernet					
4XC7A08238	BK1H	ThinkSystem Broadcom 57414 10/25GbE SFP28 2-port PCIe Ethernet Adapter	6	3-8	PCIe x8
4XC7A80566	BNWM	ThinkSystem Broadcom 57504 10/25GbE SFP28 4-port PCIe Ethernet Adapter	4	3-8	PCIe x16
4XC7A62580	BE4U	ThinkSystem Mellanox ConnectX-6 Lx 10/25GbE SFP28 2-port PCIe Ethernet Adapter	6	3-8	PCIe x8
4XC7A99191	C62J	ThinkSystem Nvidia ConnectX-7 10/25GbE SFP28 4-Port PCIe Ethernet Adapter(Generic)*	4	3-8	PCIe x16
100 Gb Ethernet and HDR100 InfiniBand					
4XC7A08297	BK1J	ThinkSystem Broadcom 57508 100GbE QSFP56 2-Port PCIe 4 Ethernet Adapter	4	3-8	PCIe x16
4XC7A08248	B8PP	ThinkSystem Mellanox ConnectX-6 Dx 100GbE QSFP56 2-port PCIe Ethernet Adapter	4	3-8	PCIe x16
200 Gb Ethernet and HDR/NDR200 InfiniBand					
4XC7A81883	BQBN	ThinkSystem NVIDIA ConnectX-7 NDR200/200GbE QSFP112 2-port PCIe Gen5 x16 Adapter	4	3-8	PCIe x16
4XC7A87752	BVVG	ThinkSystem NVIDIA BlueField-3 B3220 VPI QSFP112 2P 200G PCIe Gen5 x16 Adapter	2‡	3-8	PCIe x16
400 Gb Ethernet and NDR InfiniBand					
4XC7A95572	C4GA	ThinkSystem Broadcom 57608 2x200/1x400GbE QSFP112 PCIe Ethernet Adapter	4	3-8	PCIe x16
4XC7A95508	C51C	ThinkSystem NVIDIA ConnectX-7 NDR400 OSFP 1-port PCIe Gen5 VPI Adapter	4	3-8	PCIe x16
4XC7B03668	C9AQ	ThinkSystem NVIDIA ConnectX-8 8240 400GbE / 400Gb/s IB QSFP112 2-port PCIe Gen6 x16 (Generic FW)*	2‡	5,7	PCIe x16
800 Gb XDR InfiniBand / 400 Gb Ethernet					
4XC7B03667	C9AP	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)*	2‡	5,7	PCIe x16

* See the [Adapters with Generic firmware](#) section

‡ CX8 and B3220 adapters require additional cables; see below

The NVIDIA ConnectX-8 8240 adapter (2x 400Gb) and ConnectX-8 8180 adapter (1x 800Gb) both require the use of an Auxiliary cable which plugs into a second PCIe x16 connection. The combination of the x16 host interface of the adapter plus the x16 connection of the Auxiliary cable results in a PCIe 5.0 x32 connection, needed for 800 Gb networking connectivity. Ordering information for the Auxiliary cable is listed in the following table. For CTO orders, the cable is automatically selected when the adapter is selected.

Table 45. Auxiliary cable needed for ConnectX-8 adapters

Part number	Feature code	Description
4X97B05994	C8WC	ThinkSystem 1U/2U V4 NVIDIA ConnectX-8 Aux Cable Kit

When adding ThinkSystem NVIDIA BlueField-3 B3220 VPI QSFP112 2P 200G PCIe Gen5 x16 Adapter (4XC7A87752) as a field upgrade, the power cable kit listed in the following table will also need to be ordered. For CTO orders, the appropriate cable is automatically selected when the adapter is selected, based on the slot the adapter is installed in.

Table 46. Power cable for BlueField-3 B3220 DPU

Part number	Feature code	Description
4X97B04861	C6R3 / C6R1	ThinkSystem SR650/a V4 DPU Adapter Power Cable Kit <ul style="list-style-type: none"> • 1x 220mm power cable for adapters in slot 5, 8 (SBB7A95591, C6R3) • 1x 400mm power cable for adapters in slots 4, 6, 7 (SBB7A95592, C6R1)

For more information, including the transceivers and cables that each adapter supports, see the list of Lenovo Press Product Guides in the Networking adapters category:

<https://lenovopress.com/servers/options/ethernet>

Adapters with Generic firmware

As indicated in the tables of supported adapters, some adapters are now offered by Lenovo with standard vendor firmware (look for "Generic FW" or "Generic" in the adapter names). These adapters are supported in Lenovo servers however there are currently limitations on the use of Lenovo management tools.

Support in Lenovo XClarity management tools for adapters with generic firmware is per the following table.

Tip: Always use firmware that is obtained from Lenovo sources to ensure the firmware is fully tested by Lenovo and is supported. You should not use firmware that is obtained from the vendor web site, unless directed to do so by Lenovo support.

Table 47. Lenovo XClarity management tools support for adapters with generic firmware

Function	Lenovo XClarity Provisioning Manager	Lenovo XClarity OneCLI (out-of-band)	Lenovo XClarity OneCLI (in-band)	Lenovo XClarity Administrator
Adapter configuration	Supported (in-band via UEFI)	Planned for support 3Q/2025	Planned for support 3Q/2025	Planned for support 3Q/2025

GPU adapters

This section describes the supported GPUs.

- [GPU part numbers](#)
- [GPU configuration rules](#)
- [GPU Full Length Thermal Option Kit](#)
- [GPU cable kits](#)

GPU part numbers

The SR650a V4 supports the following graphics processing units (GPUs).

Passive GPUs only: Only GPUs with passive cooling are supported. GPUs with active cooling are not supported because the GPUs are installed in the front in the SR650a V4 and the airflow generated by the GPU fans is the wrong direction.

Table 48. Supported GPUs

Part number	Feature code	Description	Controlled GPU	TDP	Form factor	Aux power	Max qty	Slots supported
Single-wide GPUs								
4X67A84824	BS2C	ThinkSystem NVIDIA L4 24GB PCIe Gen4 Passive GPU	Controlled	72W	LP	No	8	16-23**
Double-wide GPUs								
4X67A89325	BXAK	ThinkSystem NVIDIA H100 NVL 94GB PCIe Gen5 Passive GPU	Controlled	400W	FHFL	Yes	4	17,19,21,23*
4X67A90669	BYFH	ThinkSystem NVIDIA L40S 48GB PCIe Gen4 Passive GPU	Controlled	350W	FHFL	Yes	4	17,19,21,23*
NVLink Bridge for H100 GPUs								
4X67A71309	BG3F	ThinkSystem NVIDIA Ampere NVLink 2-Slot Bridge	-	-	-	-	3 per pair	-

* When a double-wide GPU is installed in slot 17, 19, 21 or 23, the adjacent slot (slot 16, 18, 20, 22, respectively) is unavailable

** These GPUs have a x16 host interface but are supported in either x16 or x8 slots

For information about these GPUs, see the ThinkSystem GPU Summary, available at:

<https://lenovopress.com/lp0768-thinksystem-thinkagile-gpu-summary>

GPU configuration rules

The following configuration requirements must be met when installing GPUs:

- The table includes a Controlled GPU column. If a GPU is listed as Controlled, that means the GPU is not offered in certain markets, as determined by the US Government. If a GPU is listed as No, that means the GPU is not controlled and is available in all markets.
- All GPUs installed must be identical
- In the SR650a V4, GPUs are only supported in the front slots
- When a double-wide GPU is installed the adjacent slot is not available
- For configurations with H100 GPUs, the server optionally supports NVLink bridges (4X67A71309) to connect two adjacent GPUs together. Each pair of GPUs supports 3x NVLink bridges. NVLink bridges are optional, but if they are used, then 3 must be installed for each pair of GPUs:
 - GPUs in slots 17 & 19: 3x NVLink bridges
 - GPUs in slots 21 & 23: 3x NVLink bridges

For additional GPU requirements, see the Thermal rules page in the User Guide:

https://pubs.lenovo.com/sr650a-v4/thermal_rules

GPU Full Length Thermal Option Kit

When installing any full-length GPU as a field upgrade, you will also need to order the GPU Enablement Kit as listed in the following table. This kit is only required for full-length GPUs and is not required for low profile GPUs such as the NVIDIA L4. See the GPU part number table above for GPU form factors.

Table 49. ThinkSystem SR650 V4 Full Length GPU Thermal Option Kit

Part number	Description	Maximum supported
4X67B04303	ThinkSystem SR650 V4 Full Length GPU Thermal Option Kit <ul style="list-style-type: none"> ● 2x performance heatsinks - replace existing 2U heatsinks (SBB7A85750, C3QR) ● 1x ThinkSystem 2U GPU air duct - replaces main air baffle (SBB7A86004, C3RP) ● 2x Air duct fillers - needed in each riser zone if no GPU is installed in that zone (SBB7A17338, B8MB) ● 2x Air duct filler HL (SBB7A86336) ● 2x Air duct upper filler (SBB7A86338, C3SK) ● 4x 16-pin GPU power cables for double-wide GPUs (SBB7A87740, C3QU) 	1

GPU cable kits

The following cable kits are offered to provide auxiliary power cables for GPUs that require one. See the [GPU part numbers](#) section to see which GPUs require an auxiliary power cable.

Configuration notes:

- This cable kit is only required for field upgrades; factory (CTO) orders will automatically include any required cables.
- This cable kit is only required for GPUs that require an auxiliary power cable. See the GPU part number table.
- The cable kit is only required if you are adding *additional* GPUs to a server that already has at least one GPU installed from a CTO order. If you are doing a field upgrade to install the *first* DW GPU to a server, order the ThinkSystem SR650 V4 Full Length GPU Thermal Option Kit, 4X67B04303 instead, since 4X67B04303 includes the necessary power cables.

Table 50. GPU cable kits

Part number	Description
4X97B04860	ThinkSystem SR650/a V4 GPU Power Cable Kit <ul style="list-style-type: none"> ● 1x 16-pin GPU power cable (SBB7A87740, C3QU)

Fibre Channel host bus adapters

The following table lists the Fibre Channel HBAs supported by the SR650a V4.

Table 51. Fibre Channel HBAs

Part number	Feature code	Description	Maximum supported	Slots supported
32Gb Fibre Channel				
4XC7A96457	C5FC	ThinkSystem Emulex LPe37102 32Gb 2-port SecureHBA PCIe Fibre Channel Adapter(Generic FW)	6	3-8
4XC7A08279	BA1G	ThinkSystem QLogic QLE2770 32Gb 1-Port PCIe Fibre Channel Adapter	6	3-8
4XC7A08276	BA1F	ThinkSystem QLogic QLE2772 32Gb 2-Port PCIe Fibre Channel Adapter	6	3-8
64Gb Fibre Channel				
4XC7A96458	C5FD	ThinkSystem Emulex LPe38102 64Gb 2-port SecureHBA PCIe Fibre Channel Adapter(Generic FW)	6	3-8
4XC7A96744	C4L3	ThinkSystem QLogic QLE2872 64Gb 2-Port PCIe Fibre Channel Adapter(Generic FW)	6	3-8

For more information, see the list of Lenovo Press Product Guides in the Host bus adapters category:
<https://lenovopress.com/servers/options/hba>

SAS adapters for external storage

The following table lists SAS HBAs and RAID adapters supported by SR650a V4 server for use with external storage.

Table 52. Adapters for external storage

Part number	Feature code	Description	Maximum supported	Slots supported
SAS HBA - PCIe 4.0				
4Y37A09724	B8P7	ThinkSystem 440-16e SAS/SATA PCIe Gen4 12Gb HBA	6	3-8
RAID Adapter - PCIe 4.0				
4Y37A78836	BNWJ	ThinkSystem RAID 940-8e 4GB Flash PCIe Gen4 12Gb Adapter	4	3-8

* The RAID adapter use a flash power module (supercap), which needs to be installed in one of the available locations in the server. For field upgrades, ensure the server configuration supports the required number of supercaps. See the [RAID flash power module \(supercap\) support](#) section for details.

For a comparison of the functions of the supported storage adapters, see the ThinkSystem RAID Adapter and HBA Reference:

<https://lenovopress.lenovo.com/lp1288#sr650a-v4-support=SR650a%2520V4&internal-or-external-ports=External>

For more information, see the list of Lenovo Press Product Guides in the Host bus adapters and RAID adapters categories:

<https://lenovopress.com/servers/options/hba>

<https://lenovopress.com/servers/options/raid>

Cooling

The SR650a V4 optionally supports open-loop water cooling to remove heat from the processors. For details of available cooling methods, see the [Processor cooling](#) section.

The SR650a V4 server has up to six 60 mm hot-swap variable-speed fans. Five fans are needed when one processor is installed and six fans are required when two processors are installed. The server offers N+1 rotor redundancy. The server also has one or two additional fans integrated in each of the two power supplies.

System fan choices are as follows:

- High performance fans, dual-rotor, 20K RPM
- Ultra performance fans, dual-rotor, 21K RPM

Fan selection is based on the configuration of the server, as follows:

- Performance fans: Under the following conditions, Performance fans can be used:
 - 8x Single-wide GPUs
 - 4x Double-wide GPUs ≤ 250W
- Ultra fans: Under the following conditions, Ultra fans are required:
 - 4x Double-wide GPUs > 250W

Ordering information for the fans is listed in the following table.

Table 53. Fan ordering information

Part number	Feature code	Description	Qty 1 CPU	Qty 2 CPUs
4H47B03709	C3RD	ThinkSystem SR650/a V4 Performance Fan Module Option Kit	5	6
4H47B03710	C3RF	ThinkSystem SR650/a V4 Ultra Fan Module Option Kit	5	6

Power supplies

The SR650a V4 supports up to two redundant hot-swap power supplies.

The power supply choices are listed in the following table. If two power supplies are installed, both power supplies used in server must be identical.

Topics in this section:

- [Power supply LEDs](#)
- [Power cords](#)
- [Power cords \(C19 connectors\)](#)
- [-48V DC power cord](#)
- [HVAC/HVDC power cord](#)

Tip: When configuring a server in the DCSC configurator, power consumption is calculated precisely by interfacing with Lenovo Capacity Planner. You can therefore select the appropriate power supply for your configuration. However, do consider future upgrades that may require additional power needs.

Table 54. Power supply options

Part number	Feature code	Description	Max Qty	Capacity (230V)	Capacity (115V)	Voltage	Connector
Titanium AC power supplies - CRPS Premium							
4P57A88687	C0U7	ThinkSystem 800W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	2	800W	800W	230V/115V	C14

Part number	Feature code	Description	Max Qty	Capacity (230V)	Capacity (115V)	Voltage	Connector
4P57A88621	C0U4	ThinkSystem 1300W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	2	1300W	1000W	230V/115V	C14
4P57A88689	C0U3	ThinkSystem 2000W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	2	2000W	No support*	230V	C14
4P57A88622	C0UC	ThinkSystem 2700W 230V Titanium CRPS Premium Hot-Swap Power Supply	2	2700W	-	230V	C20
4P57A88623	C0UD	ThinkSystem 3200W 230V Titanium CRPS Premium Hot-Swap Power Supply	2	3200W	-	230V	C20
Titanium AC power supplies - CRPS							
4P57A87056	BWM3	ThinkSystem 800W 230V/115V Titanium CRPS Hot-Swap Power Supply v1.4	2	800W	800W	230V/115V	C14
4P57A87628	C2Y9	ThinkSystem 1300W 230V/115V Titanium CRPS Hot-Swap Power Supply v2.4	2	1300W	1000W	230V/115V	C14
Platinum AC power supplies - CRPS							
4P57A89306	C0U8	ThinkSystem 800W 230V/115V Platinum CRPS Hot-Swap Power Supply v1.5	2	800W	800W	230V/115V	C14
4P57A89307	C0U6	ThinkSystem 1300W 230V/115V Platinum CRPS Hot-Swap Power Supply v1.5	2	1300W	1000W	230V/115V	C14
4P57A88636	C0U5	ThinkSystem 1300W 230V/115V Platinum CRPS Hot-Swap Power Supply v2.4	2	1300W	1000W	230V/115V	C14
4P57A89308	C0UA	ThinkSystem 2700W 230V Platinum CRPS Hot-Swap Power Supply v2.3	2	2700W	-	230V	C20
4P57A88628	C0UB	ThinkSystem 2700W 230V Platinum CRPS Hot-Swap Power Supply v2.4	2	2700W	-	230V	C20
HVAC/HVDC power supplies - CRPS Premium							
4P57A88627	C0TR	ThinkSystem 1300W HVAC/HVDC Platinum CRPS Premium Hot-Swap Power Supply	2	1300W	-	200-277V AC 240-380V DC	Amphenol 10167814-002
-48V DC power supplies - CRPS Premium							
4P57A88625	C0TS	ThinkSystem 1300W -48V DC CRPS Premium Hot-Swap Power Supply	2	1300W	-	-48V	BizLink 115H0-025987-R1

* In the SR650a V4, ThinkSystem 2000W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply (4P57A88689) is only supported with high-range voltage (200-240V) even though the power supply includes 115V in the description

Supported voltage ranges are as follows:

- The 230V/115V AC power supplies support both low-range (100-127V 50/60 Hz) and high-range (200-240V 50/60 Hz) power, except where noted. For China customers, all power supplies support 240V DC.

- The -48V DC power supply supports voltage range -44V to -54V DC.
- The HVAC/HVDC power supply supports voltage ranges 200-277V AC single phase, and 240-380V DC

For inlet current requirements, see the [Physical and electrical specifications](#) section.

Power supply options do not include a line cord. See the tables below for details about supported line cords, including the power cords for the DC power supplies. For server configurations, the inclusion of a power cord is model dependent. Configure-to-order models can be configured without power cords if desired.

The SR650a V4 supports both CRPS and CRPS Premium power supplies. CRPS Premium power supplies offer the following additional features:

- Over-subscription
- More accurate power metering
- Virtual reseal
- Enhanced fault detection
- System cooling assist (fan override)
- Fault LEDs
- VPD support
- Zero-output mode support (cold redundancy mode)

Power supply LEDs

CRPS Premium power supplies have two LEDs:

- Power output/fault LED:
 - Green: The server is on and the power supply is working normally
 - Green, slow blinking (1 flash/sec): The power supply is in Zero-output/Standby mode (see below)
 - Green, fast blinking (5 flashes/sec): The power supply unit is in firmware update mode
 - Yellow: The power supply unit may have failed.
 - Off: The server is powered off, or the power supply is not working properly
- Power input LED:
 - Green: The power supply is connected to the input power source
 - Off: The power supply is disconnected from the AC power source or a power problem has occurred

CRPS power supplies have one LED:

- Green: The server is on and the power supply is working normally
- Green, blinking: The power supply unit is in firmware update mode
- Yellow: Either the power supply has failed, or two power supplies are installed but one is not connected to the input power source
- Yellow, blinking: The power supply is indicating a warning such as over-temperature warning, over-current warning, or a slow fan speed
- Off: The server is powered off, or the power supply is not working properly

Power cords

Line cords and rack power cables with C13 connectors can be ordered as listed in the following table.

115V customers: If you plan to use the 1300W power supply with a low-range (100-127V) power source, select a power cable that is rated above 10A. Power cables that are rated at 10A or below are not supported with low-range power.

Table 55. Power cords

Part number	Feature code	Description
Rack cables - C13 to C14		
SL67B08593	BPHZ	0.5m, 10A/100-250V, C13 to C14 Jumper Cord
00Y3043	A4VP	1.0m, 10A/100-250V, C13 to C14 Jumper Cord
4L67A08367	B0N5	1.0m, 13A/100-250V, C13 to C14 Jumper Cord
39Y7937	6201	1.5m, 10A/100-250V, C13 to C14 Jumper Cord
4L67A08368	B0N6	1.5m, 13A/100-250V, C13 to C14 Jumper Cord
4L67A08365	B0N4	2.0m, 10A/100-250V, C13 to C14 Jumper Cord
4L67A08369	6570	2.0m, 13A/100-250V, C13 to C14 Jumper Cord
4L67A08366	6311	2.8m, 10A/100-250V, C13 to C14 Jumper Cord
4L67A08370	6400	2.8m, 13A/100-250V, C13 to C14 Jumper Cord
39Y7932	6263	4.3m, 10A/100-250V, C13 to C14 Jumper Cord
4L67A08371	6583	4.3m, 13A/100-250V, C13 to C14 Rack Power Cable
Rack cables - C13 to C14 (Y-cable)		
00Y3046	A4VQ	1.345m, 2X C13 to C14 Jumper Cord, Rack Power Cable
00Y3047	A4VR	2.054m, 2X C13 to C14 Jumper Cord, Rack Power Cable
Rack cables - C13 to C20		
39Y7938	6204	2.8m, 10A/100-250V, C13 to IEC 320-C20 Rack Power Cable
Rack cables - C13 to C20 (Y-cable)		
47C2491	A3SW	1.2m, 16A/100-250V, 2 Short C13s to Short C20 Rack Power Cable
47C2492	A3SX	2.5m, 16A/100-250V, 2 Long C13s to Short C20 Rack Power Cable
47C2493	A3SY	2.8m, 16A/100-250V, 2 Short C13s to Long C20 Rack Power Cable
47C2494	A3SZ	4.1m, 16A/100-250V, 2 Long C13s to Long C20 Rack Power Cable
Line cords		
39Y7930	6222	2.8m, 10A/250V, C13 to IRAM 2073 (Argentina) Line Cord
81Y2384	6492	4.3m 10A/220V, C13 to IRAM 2073 (Argentina) Line Cord
39Y7924	6211	2.8m, 10A/250V, C13 to AS/NZ 3112 (Australia/NZ) Line Cord
81Y2383	6574	4.3m, 10A/230V, C13 to AS/NZS 3112 (Aus/NZ) Line Cord
69Y1988	6532	2.8m, 10A/250V, C13 to NBR 14136 (Brazil) Line Cord
81Y2387	6404	4.3m, 10A/250V, C13 - 2P+Gnd (Brazil) Line Cord
39Y7928	6210	2.8m, 10A/220V, C13 to GB 2099.1 (China) Line Cord
81Y2378	6580	4.3m, 10A/220V, C13 to GB 2099.1 (China) Line Cord
39Y7918	6213	2.8m, 10A/250V, C13 to DK2-5a (Denmark) Line Cord
81Y2382	6575	4.3m, 10A/230V, C13 to DK2-5a (Denmark) Line Cord
39Y7917	6212	2.8m, 10A/230V, C13 to CEE7-VII (Europe) Line Cord
81Y2376	6572	4.3m, 10A/230V, C13 to CEE7-VII (Europe) Line Cord
39Y7927	6269	2.8m, 10A/250V, C13(2P+Gnd) (India) Line Cord
81Y2386	6567	4.3m, 10A/240V, C13 to IS 6538 (India) Line Cord
39Y7920	6218	2.8m, 10A/250V, C13 to SI 32 (Israel) Line Cord
81Y2381	6579	4.3m, 10A/230V, C13 to SI 32 (Israel) Line Cord
39Y7921	6217	2.8m, 220-240V, C13 to CEI 23-16 (Italy/Chile) Line Cord
81Y2380	6493	4.3m, 10A/230V, C13 to CEI 23-16 (Italy/Chile) Line Cord

Part number	Feature code	Description
46M2593	A1RE	2.8m, 12A/125V, C13 to JIS C-8303 (Japan) Line Cord
4L67A08362	6495	4.3m, 12A/200V, C13 to JIS C-8303 (Japan) Line Cord
39Y7926	6335	4.3m, 12A/100V, C13 to JIS C-8303 (Japan) Line Cord
39Y7922	6214	2.8m, 10A/250V, C13 to SABS 164 (S Africa) Line Cord
81Y2379	6576	4.3m, 10A/230V, C13 to SABS 164 (South Africa) Line Cord
39Y7925	6219	2.8m, 220-240V, C13 to KETI (S Korea) Line Cord
81Y2385	6494	4.3m, 12A/220V, C13 to KSC 8305 (S. Korea) Line Cord
39Y7919	6216	2.8m, 10A/250V, C13 to SEV 1011-S24507 (Swiss) Line Cord
81Y2390	6578	4.3m, 10A/230V, C13 to SEV 1011-S24507 (Sws) Line Cord
23R7158	6386	2.8m, 10A/125V, C13 to CNS 10917-3 (Taiwan) Line Cord
81Y2375	6317	2.8m, 10A/240V, C13 to CNS 10917-3 (Taiwan) Line Cord
81Y2374	6402	2.8m, 13A/125V, C13 to CNS 60799 (Taiwan) Line Cord
4L67A08363	AX8B	4.3m, 10A 125V, C13 to CNS 10917 (Taiwan) Line Cord
81Y2389	6531	4.3m, 10A/250V, C13 to 76 CNS 10917-3 (Taiwan) Line Cord
81Y2388	6530	4.3m, 13A/125V, C13 to CNS 10917 (Taiwan) Line Cord
39Y7923	6215	2.8m, 10A/250V, C13 to BS 1363/A (UK) Line Cord
81Y2377	6577	4.3m, 10A/230V, C13 to BS 1363/A (UK) Line Cord
90Y3016	6313	2.8m, 10A/120V, C13 to NEMA 5-15P (US) Line Cord
46M2592	A1RF	2.8m, 10A/250V, C13 to NEMA 6-15P Line Cord
00WH545	6401	2.8m, 13A/120V, C13 to NEMA 5-15P (US) Line Cord
4L67A08359	6370	4.3m, 10A/125V, C13 to NEMA 5-15P (US) Line Cord
4L67A08361	6373	4.3m, 10A/250V, C13 to NEMA 6-15P (US) Line Cord
4L67A08360	AX8A	4.3m, 13A/120V, C13 to NEMA 5-15P (US) Line Cord

Power cords (C19 connectors)

Line cords and rack power cables with C19 connectors can be ordered as listed in the following table.

Table 56. Power cords (C19 connectors)

Part number	Feature code	Description
Rack cables		
4L67A86677	BPJ0	0.5m, 16A/100-250V, C19 to IEC 320-C20 Rack Power Cable
4L67A86678	B4L0	1.0m, 16A/100-250V, C19 to IEC 320-C20 Rack Power Cable
4L67A86679	B4L1	1.5m, 16A/100-250V, C19 to IEC 320-C20 Rack Power Cable
4L67A86680	B4L2	2.0m, 16A/100-250V, C19 to IEC 320-C20 Rack Power Cable
39Y7916	6252	2.5m, 16A/100-240V, C19 to IEC 320-C20 Rack Power Cable
4L67A86681	B4L3	4.3m, 16A/100-250V, C19 to IEC 320-C20 Rack Power Cable
Line cords		
40K9777	6276	4.3m, 220-240V, C19 to IRAM 2073 (Argentina) Line cord
40K9773	6284	4.3m, 220-240V, C19 to AS/NZS 3112 (Aus/NZ) Line cord
40K9775	6277	4.3m, 250V, C19 to NBR 14136 (Brazil) Line Cord
40K9774	6288	4.3m, 220-240V, C19 to GB2099.1 (China) Line cord
40K9769	6283	4.3m, 16A/230V, C19 to IEC 309-P+N+G (Den/Sws) Line Cord

Part number	Feature code	Description
40K9766	6279	4.3m, 220-240V, C19 to CEE7-VII (European) Line cord
40K9776	6285	4.3m, 220-240V, C19 to IS6538 (India) Line cord
40K9771	6282	4.3m, 220-240V, C19 to SI 32 (Israel) Line cord
40K9768	6281	4.3m, 220-240V, C19 to CEI 23-16 (Italy) Line cord
40K9770	6280	4.3m, 220-240V, C19 to SABS 164 (South Africa) Line cord
41Y9231	6289	4.3m, 15A/250V, C19 to KSC 8305 (S. Korea) Line Cord
81Y2391	6549	4.3m, 16A/230V, C19 to SEV 1011 (Sws) Line Cord
41Y9230	6287	4.3m, 16A/250V, C19 to CNS 10917-3 (Taiwan) Line Cord
40K9767	6278	4.3m, 220-240V, C19 to BS 1363/A w/13A fuse (UK) Line Cord
40K9772	6275	4.3m, 16A/208V, C19 to NEMA L6-20P (US) Line Cord
00D7197	A1NV	4.3m, 15A/250V, C19 to NEMA 6-15P (US) Line Cord

-48V DC power cord

For the -48V DC Power Supply, the following power cable is supported.

Table 57. -48V DC power cable

Part number	Feature code	Description
4L67A97438	C682	2.8m, 38A /-48V, -48V (3V3) Line Cord

The following figure shows the power cable.

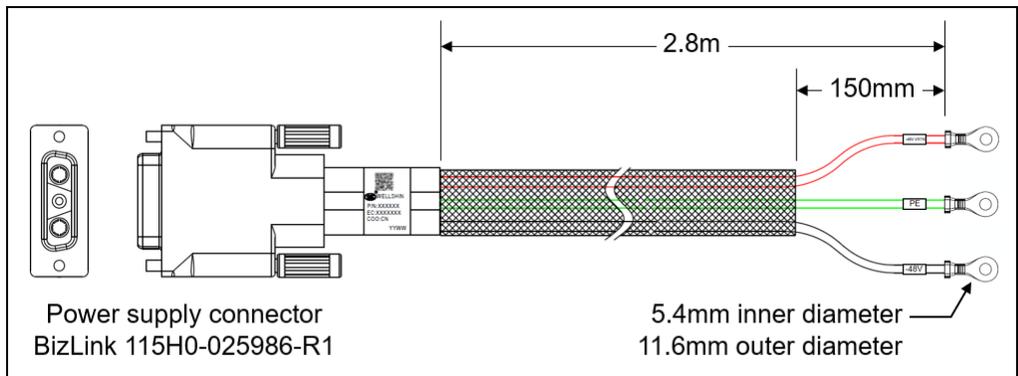


Figure 23. -48V DC power cord

HVAC/HVDC power cord

For the HVDC Power Supply, the following power cable is supported.

Table 58. -48V DC power cable

Part number	Feature code	Description
4L67A97238	C683	2.8M,10A/400V,HVDC Line Cord

The following figure shows the power cable.

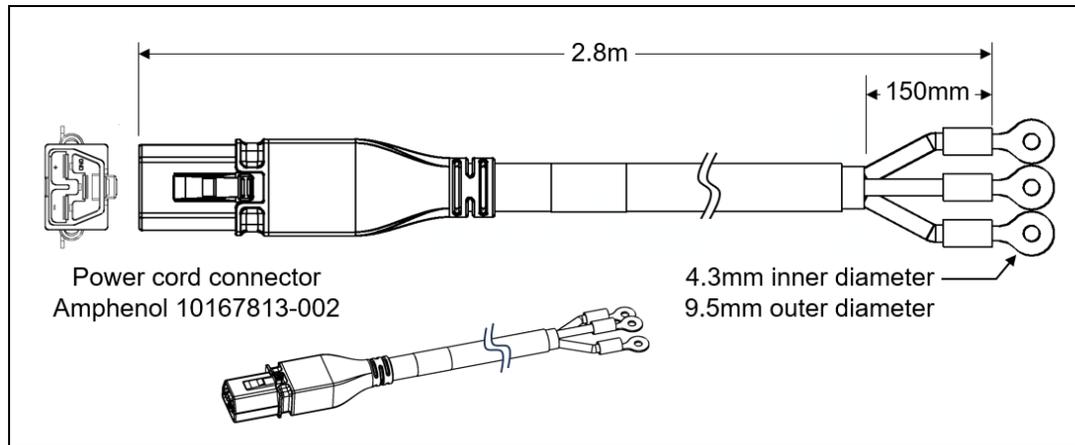


Figure 24. HVDC power cord

Systems management

The SR650a V4 contains an integrated service processor, XClarity Controller 3 (XCC3), which provides advanced control, monitoring, and alerting functions. The XCC3 is based on an OpenBMC design, using the AST2600 baseboard management controller (BMC) with a dual-core ARM Cortex A7 32-bit RISC service processor running at 1.2 GHz.

Topics in this section:

- [System I/O Board \(DC-SCM\)](#)
- [Local management](#)
- [System status with XClarity Mobile](#)
- [Remote management](#)
- [Shared connectivity for remote management](#)
- [MicroSD for XCC local storage](#)
- [XCC3 Premier](#)
- [Lenovo XClarity Provisioning Manager](#)
- [Lenovo XClarity One](#)
- [Lenovo XClarity Administrator](#)
- [Lenovo XClarity Integrators](#)
- [Lenovo XClarity Essentials](#)
- [Lenovo XClarity Energy Manager](#)
- [Lenovo Capacity Planner](#)

System I/O Board (DC-SCM)

The SR650a V4 implements a separate System I/O Board, also known as the DC-SCM (Data Center Secure Control Module, DCSCM), that connects to the system board as shown in the Internal view in the [Components and connectors](#) section. The System I/O Board contains connectors that are accessible from the exterior of the server as shown in the following figure.

Note: The NMI (non-maskable interrupt) button is not accessible from the rear of the server. Lenovo recommends using the NMI function that is part of the XCC user interfaces instead.

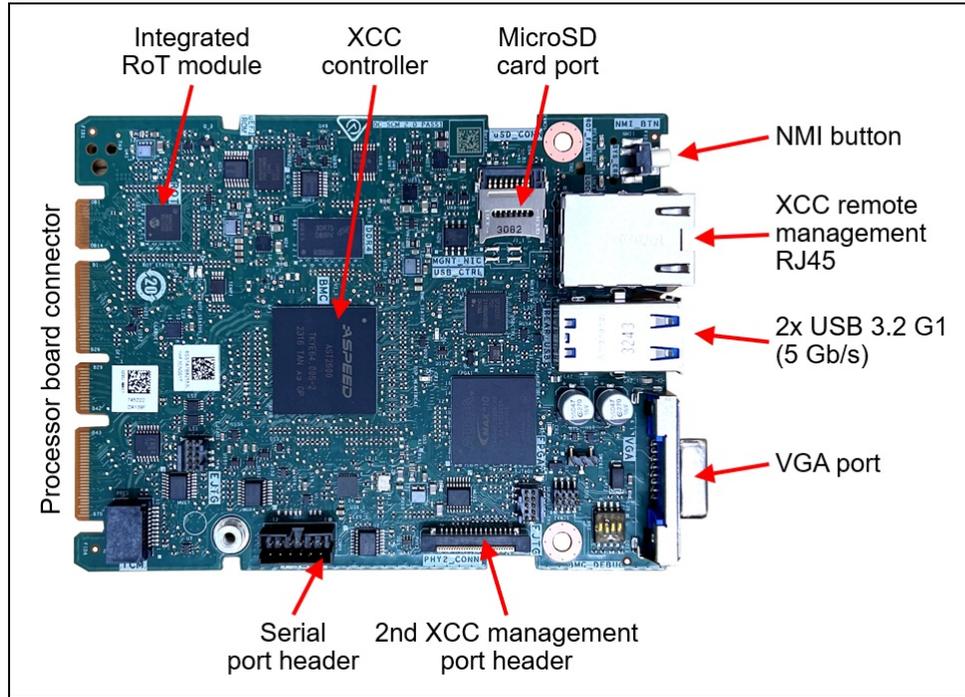


Figure 25. System I/O Board

The board also has the following components:

- XClarity Controller 3, implemented using the ASPEED AST2600 baseboard management controller (BMC).
- Root of Trust (RoT) module - implements Platform Firmware Resiliency (PFR) hardware Root of Trust (RoT) which enables the server to be NIST SP800-193 compliant. For more details about PFR, see the [Security](#) section.
- MicroSD card port to enable the use of a MicroSD card for additional storage for use with the XCC3 controller. XCC3 can use the storage as a Remote Disc on Card (RDOC) device (up to 4GB of storage). It can also be used to store firmware updates (including N-1 firmware history) for ease of deployment.

Tip: Without a MicroSD card installed, the XCC controller will have 100MB of available RDOC storage.

Ordering information for the supported Micro SD cards are listed in the [MicroSD for XCC local storage](#) section.

Local management

The SR650a V4 offers a front operator panel with key LED status indicators, as shown in the following figure.

Tip: The Network LED only shows network activity of an installed OCP network adapter. The LED shows activity from both OCP adapters if two are installed.

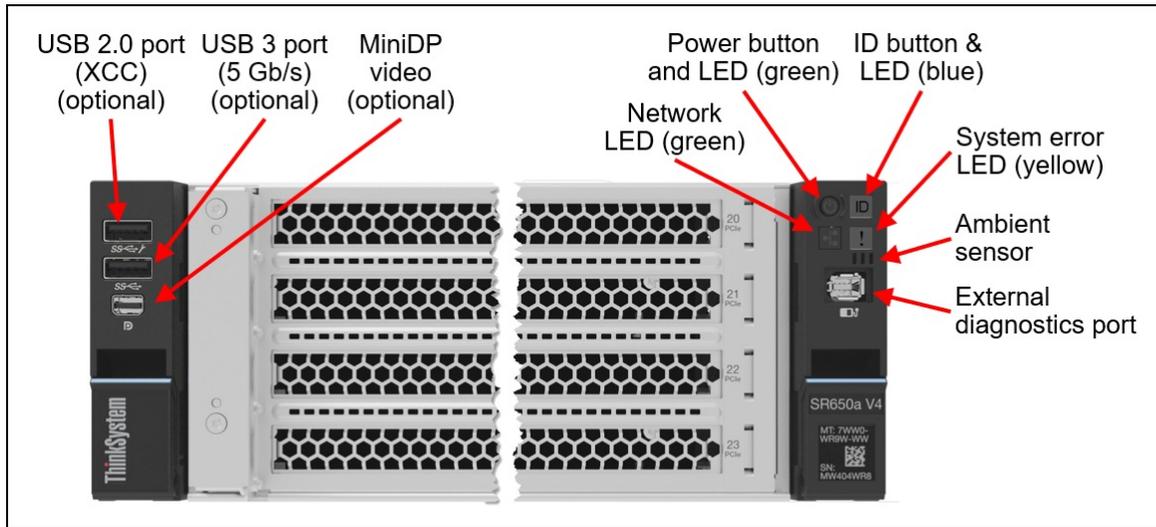


Figure 26. Front operator controls are on the left and right side of the server

Front DisplayPort video port and Front/Internal USB ports

The rear USB ports and VGA video port are standard on all models of the SR650a V4, however the front and internal USB ports, and front MiniDP video port are optional, and can be configured in the factory in CTO orders, or as field upgrades using option part numbers.

Internal USB port: The internal USB port supports USB drives that have an overall length of less than 30mm. See the [USB flash drive](#) section for the supported drive.

For CTO orders, the feature codes are listed in the following table.

Table 59. CTO orders - Front & internal ports

Feature code	Description	Purpose
C5MU	ThinkSystem SR650a V4 Standard Left Rack Latch	No front USB ports, no MiniDP video port
C1YR	ThinkSystem 1U/2U V4 USB Ports Extension Board	Provides the Internal USB 3 port (5 Gb/s)
C4S4*	ThinkSystem SR650a V4 Left Rack Latch with USB/MiniDP	Provides the 2x Front USB 3 ports (5 Gb/s) and MiniDP 1.1a port (requires Internal USB port, C1YR)

* Feature C1YR must also be selected

Configuration rules:

- The Internal USB port (C1YR) can be selected without also selecting the front USB/MiniDP ports
- The Front USB ports and MiniDP requires that the Internal USB port (C1YR) also be selected
- The front USB ports are required to use XClarity Mobile, as described in the [System status with XClarity Mobile](#) section.

For field upgrades, the part numbers listed in the following table are available.

Table 60. Local management

Part number	Description	Purpose
4XF7B03892	ThinkSystem SR650/a V4 Left Rack Latch with USB/MiniDP Option kit <ul style="list-style-type: none"> ● USB I/O board with Internal USB port ● Front media bezel with USB ports and MiniDP port for SR650 V4 ● Front media bezel with USB ports and MiniDP port for SR650a V4 	Adds Internal USB 3 port (5 Gb/s), 2x Front USB 3 ports (5 Gb/s), MiniDP 1.1a video port See the USB flash drive section for supported USB drives for internal USB port.
4XF7A99087	ThinkSystem V4 Internal USB I/O Board Option kit <ul style="list-style-type: none"> ● USB I/O board with Internal USB port 	Adds Internal USB 3 port (5 Gb/s) only.

Configuration notes for field upgrades:

- If you order ThinkSystem 1U/2U V4 Front Media Bay Option kit (4X97A96850) for use in a server that already has the internal USB port installed (feature C1YR), the USB I/O board from the kit will not be needed as it is a duplicate of what is already installed.
- ThinkSystem 1U/2U V4 Front Media Bay Option kit (4X97A96850) is required to use XClarity Mobile, as described in the [System status with XClarity Mobile](#) section.

External Diagnostics Handset

The SR650a V4 optionally has a port to connect an External Diagnostics Handset as described in the preceding section. The External Diagnostics Handset has the same functions as the Integrated Diagnostics Panel but has the advantages of not consuming space on the front of the server plus it can be shared among many servers in your data center. The handset has a magnet on the back of it to allow you to easily mount it on a convenient place on any rack cabinet.

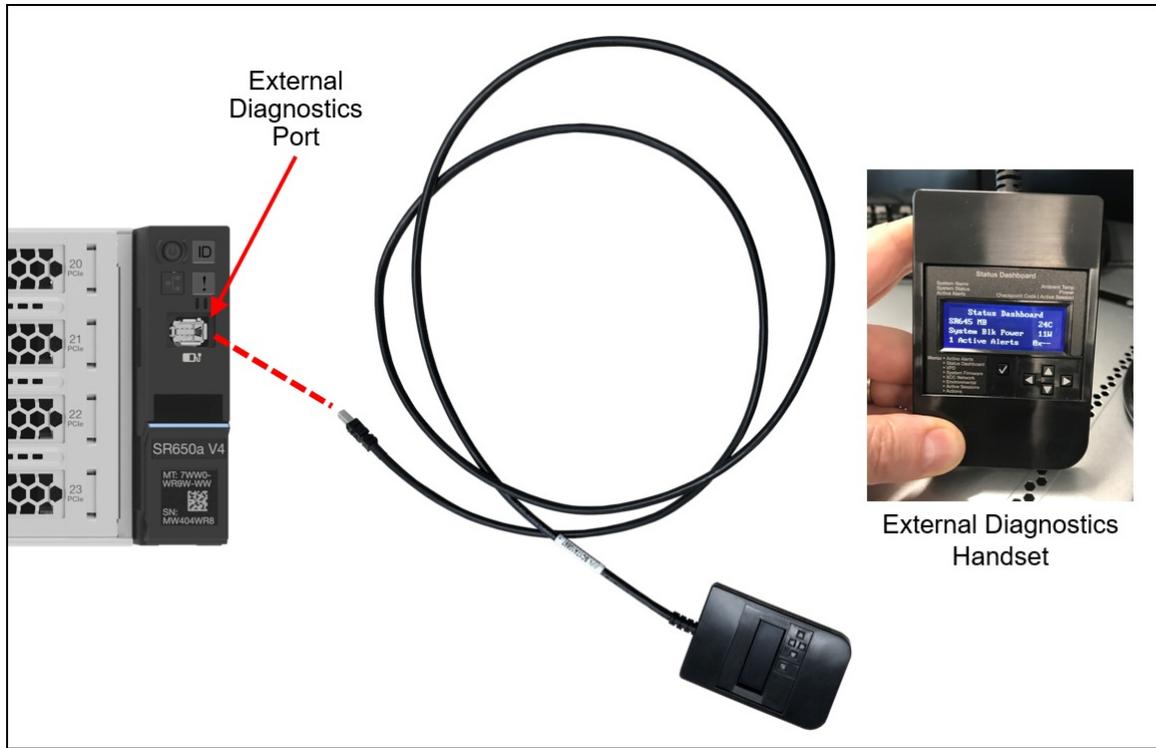


Figure 27. External Diagnostics Handset

The External Diagnostics Handset allows quick access to system status, firmware, network, and health information. The LCD display and the function buttons give you access to the following information:

- Active alerts (support planned for 4Q/2025)
- Status Dashboard (support planned for 4Q/2025)
- System VPD: machine type & mode, serial number, UUID string
- System firmware levels: UEFI and XCC firmware
- XCC network information: hostname, MAC address, IP address, DNS addresses (support planned for 4Q/2025)
- Environmental data: Ambient temperature, CPU temperature, AC input voltage, estimated power consumption (support planned for 4Q/2025)
- Active XCC sessions (support planned for 4Q/2025)
- System reset action (support planned for 4Q/2025)

Ordering information for the External Diagnostics Handset with is listed in the following table.

Table 61. External Diagnostics Handset ordering information

Part number	Feature code	Description
4TA7A64874	BEUX	ThinkSystem External Diagnostics Handset

Information pull-out tab

The front of the server also houses an information pull-out tab (also known as the network access tag). See [Figure 2](#) for the location. A label on the tab shows the network information (MAC address and other data) to remotely access the service processor.

Light path diagnostics

The server offers light path diagnostics. If an environmental condition exceeds a threshold or if a system component fails, XCC lights LEDs inside the server to help you diagnose the problem and find the failing part.

The server has fault LEDs next to the following components:

- Each memory DIMM
- Each drive bay
- Each power supply

System status with XClarity Mobile

Support is planned: Support for XClarity Mobile on the SR650a V4 is planned for 4Q/2025.

The XClarity Mobile app includes a tethering function where you can connect your Android or iOS device to the server via USB to see the status of the server.

The steps to connect the mobile device are as follows:

1. Enable USB Management on the server, by holding down the ID button for 3 seconds (or pressing the dedicated USB management button if one is present)
2. Connect the mobile device via a USB cable to the server's USB port with the management symbol 
3. In iOS or Android settings, enable Personal Hotspot or USB Tethering
4. Launch the Lenovo XClarity Mobile app

Once connected you can see the following information:

- Server status including error logs (read only, no login required)
- Server management functions (XClarity login credentials required)

Configuration notes:

- The use of XClarity Mobile requires front USB ports. If your server doesn't already include front USB ports, order the field upgrade ThinkSystem SR650/a V4 Left Rack Latch with USB/MiniDP Option kit (4XF7B03892) as described in the [Local management](#) section

Remote management

The server offers a dedicated RJ45 Ethernet port at the rear of the server for remote management via the XClarity Controller management processor. The port supports 10/100/1000 Mbps speeds.

Remote server management is provided through industry-standard interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3 (no SET commands; no SNMP v1)
- Common Information Model (CIM-XML)
- Representational State Transfer (REST) support
- Redfish support (DMTF compliant)
- Web browser - HTML 5-based browser interface (Java and ActiveX not required) using a responsive design (content optimized for device being used - laptop, tablet, phone) with NLS support

IPMI via the Ethernet port (IPMI over LAN) is supported, however it is disabled by default. For CTO orders you can specify whether you want the feature enabled or disabled in the factory, using the feature codes listed in the following table.

Table 62. IPMI-over-LAN settings

Feature code	Description
B7XZ	Disable IPMI-over-LAN (default)
B7Y0	Enable IPMI-over-LAN

The SR650a V4 also supports the use of an OCP adapter that provides an additional redundant Ethernet connection to the XCC3 controller. Ordering information is listed in the following table.

Table 63. Redundant System Management Port Adapter

Part number	Feature code	Description	Maximum quantity
4XC7A99825	C1XD	ThinkSystem V4 Management NIC Adapter Kit	1

The use of this adapter allows concurrent remote access using both the connection on the adapter and the onboard RJ45 remote management port provided by the server. The adapter and onboard port have separate IP addresses.

Configuration rules:

- The adapter is only supported in OCP slot 1

Shared connectivity for remote management

To reduce the number of Ethernet connections needed for remote management, the SR650a V4 supports an adapter that installs in the OCP slot that allows four servers to share the one Ethernet connection. The adapter implements a 5-port Gigabit switch based on the Microchip KSZ9896 switch chip. Ordering information is listed in the following table.

Table 64. 4-to-1 Management Port Consolidation Adapter

Part number	Feature code	Description
4XC7A90299	BZGE	ThinkSystem OCP 4 to 1 Management Port Consolidation Adapter Contains: <ul style="list-style-type: none"> • 1x OCP adapter • 2x 0.45m blue Cat5e cable • 1x 0.25m blue Cat5e cable

The adapter has four RJ45 ports. One port of the adapter connects to the local remote management port and the other three adapter ports connect to the remote management ports of three nearby servers. Either the included short Cat5e cables can be used or customer-supplied Cat5e Ethernet cables can be used.

Configuration notes:

- The adapter is only supported in OCP slot 1
- When the adapter is installed in slot 1, OCP slot 2 is disabled and cannot be used
- The OCP slot in the other three servers can be used for network connectivity, if desired.

MicroSD for XCC local storage

The server includes a MicroSD card port to enable the use of a MicroSD card for additional storage for use with the XCC controller. XCC can use the storage as a Remote Disc on Card (RDOC) device (up to 4GB of storage). It can also be used to store firmware updates (including N-1 firmware history) for ease of deployment.

Tip: Without a MicroSD card installed, the XCC controller will have 100MB of available RDOC storage.

Ordering information for the supported Micro SD cards is listed in the following table.

Table 65. Media for use with the MicroSD card port

Part number	Feature code	Description
4X77A92672	C0BC	ThinkSystem MicroSD 64GB Class 10 Flash Memory Card

XCC3 Premier

The XCC3 service processor in the SR650a V4 supports an upgrade to the Premier level of features. XCC3 Premier in ThinkSystem V4 servers is equivalent to the XCC2 Premium offering in ThinkSystem V3 servers.

XCC3 Premier adds the following functions:

- Enterprise Strict Security mode - Enforces CNSA 1.0 level security
- Remotely viewing video with graphics resolutions up to 1600x1200 at 75 Hz with up to 23 bits per pixel, regardless of the system state
- Remotely accessing the server using the keyboard and mouse from a remote client
- International keyboard mapping support
- Redirecting serial console via SSH
- Component replacement log (Maintenance History log)
- Access restriction (IP address blocking)
- Displaying graphics for real-time and historical power usage data and temperature
- Mapping the ISO and image files located on the local client as virtual drives for use by the server
- Mounting the remote ISO and image files via HTTPS, SFTP, CIFS, and NFS
- Power capping
- License for XClarity Energy Manager

The following additional XCC3 Premier features are planned for 2Q/2025

- System Guard - Monitor hardware inventory for unexpected component changes, and simply log the event or prevent booting
- Neighbor Group - Enables administrators to manage and synchronize configurations and firmware level across multiple servers
- Syslog alerting
- Lenovo SED security key management
- Boot video capture and crash video capture
- Virtual console collaboration - Ability for up to 6 remote users to be log into the remote session simultaneously
- Remote console Java client
- System utilization data and graphic view
- Single sign on with Lenovo XClarity Administrator
- Update firmware from a repository

Ordering information is listed in the following table. XCC3 Premier is a software license upgrade - no additional hardware is required.

Table 66. XCC3 Premier license upgrade

Part number	Feature code	Description
7S0X000XWW	SCY0	Lenovo XClarity Controller 3 (XCC3) Premier

With XCC3 Premier, for CTO orders, you can request that System Guard be enabled in the factory and the first configuration snapshot be recorded. To add this to an order, select feature code listed in the following table. The selection is made in the Security tab of the configurator.

Table 67. Enable System Guard in the factory (CTO orders)

Feature code	Description
BUT2	Install System Guard

For more information about System Guard, see https://pubs.lenovo.com/xcc2/NN1ia_c_systemguard

Lenovo XClarity Provisioning Manager

Lenovo XClarity Provisioning Manager (LXPM) is a UEFI-based application embedded in ThinkSystem servers and accessible via the F1 key during system boot.

LXPM provides the following functions:

- Graphical UEFI Setup
- System inventory information and VPD update
- System firmware updates (UEFI and XCC)
- RAID setup wizard
- OS installation wizard (including unattended OS installation)
- Diagnostics functions

Lenovo XClarity One

Lenovo XClarity One is a hybrid cloud-based unified Management-as-a-Service (MaaS) platform, built for growing enterprises. XClarity One is powered by Lenovo Smarter Support, a powerful AI-driven platform that leverages predictive analytics to enhance the performance, reliability, and overall efficiency of Lenovo servers.

XClarity One is the next milestone in Lenovo's portfolio of systems management products. Now you can leverage the benefits of a true next-generation, hybrid cloud-based solution for the deployment, management, and maintenance of your infrastructure through a single, centralized platform that delivers a consistent user experience across all Lenovo products.

Key features include:

- **AI-powered Automation**

Harnesses the power of AI and predictive analytics to enhance the performance and reliability of your infrastructure with proactive protection.

- **AI-Powered Predictive Failure Analytics** - predict maintenance needs before the failure occurs, with the ability to visualize aggregated actions in customer dashboard.
- **AI-Powered Call-Home** - A Call-Home serviceable event opens a support ticket automatically, leveraging AI technology for problem determination and fast resolution.
- **AI-Powered Premier Support with Auto CRU** - uses AI to automatically dispatch parts and services, reducing service costs and minimizing downtime.

- **Secure Management Hub**

Lenovo's proprietary Management Hub is an on-premises virtual appliance that acts as the bridge between your infrastructure and the cloud.

- **On-Premises Security with Cloud Flexibility** - your infrastructure has no direct connection to the cloud, greatly reducing your attack surface from external threats while still having the deployment benefits, flexibility, and scalability of a cloud solution.
- **Authentication and Authorization** - built on a Zero Trust Architecture and requiring OTP Application authentication for all users to handle the support of all customers' servers and client devices. Role-based access controls help define and restrict permissions based on user roles.

- **AI-Powered Management**

Go beyond standard system management leveraging AI algorithms to continuously learn from data patterns to optimize performance and predict potential issues before they impact operations.

- **AI Customizable Insights and Reporting** - Customize AI-generated insights and reports to align with specific business objectives, enabling data-driven decision-making and strategic planning.
- **AI-driven scalability and flexibility** - Guided with AI-driven predictions, the platform supports dynamic scaling of resources based on workload demands.
- **Monitor and Change** - AI Advanced analytics capabilities providing deep insights into server performance, resource utilization, and security threats, to detect anomalies and suggest optimizations in real-time. NLP capabilities enabling administrators to interact with the platform using voice commands or text queries.
- **Upward Integration** - Integrated with Lenovo Open Cloud Automation (LOC-A), Lenovo Intelligent Computer Orchestration (LiCO) and AIOps engines providing an end-to-end management architecture across Lenovo infrastructure and devices solutions.
- **Cross-Platform Compatibility** - Compatibility across different server types and cloud environments

Lenovo XClarity One is an optional management component. License information for XClarity One is listed in the following table.

Table 68. XClarity One license information

Part number	Description
7S0X000LWW	XClarity One - Managed Device, Per Endpoint w/1 Yr SW S&S
7S0X000MWW	XClarity One - Managed Device, Per Endpoint w/3 Yr SW S&S
7S0X000NWW	XClarity One - Managed Device, Per Endpoint w/5 Yr SW S&S

For more information, see these resources:

- Lenovo XClarity One datasheet:
<https://lenovopress.lenovo.com/ds0188-lenovo-xclarity-one>
- Lenovo XClarity One product guide:
<https://lenovopress.lenovo.com/lp1992-lenovo-xclarity-one>

Lenovo XClarity Administrator

Lenovo XClarity Administrator is a centralized resource management solution designed to reduce complexity, speed response, and enhance the availability of Lenovo systems and solutions. It provides agent-free hardware management for ThinkSystem servers. The administration dashboard is based on HTML 5 and allows fast location of resources so tasks can be run quickly.

Because Lenovo XClarity Administrator does not require any agent software to be installed on the managed endpoints, there are no CPU cycles spent on agent execution, and no memory is used, which means that up to 1GB of RAM and 1 - 2% CPU usage is saved, compared to a typical managed system where an agent is required.

Lenovo XClarity Administrator is an optional software component for the SR650a V4. The software can be downloaded and used at no charge to discover and monitor the SR650a V4 and to manage firmware upgrades.

If software support is required for Lenovo XClarity Administrator, or premium features such as configuration management and operating system deployment are required, Lenovo XClarity Pro software subscription should be ordered. Lenovo XClarity Pro is licensed on a per managed system basis, that is, each managed Lenovo system requires a license.

The following table lists the Lenovo XClarity software license options.

Table 69. Lenovo XClarity Pro ordering information

Part number	Feature code	Description
00MT201	1339	Lenovo XClarity Pro, per Managed Endpoint w/1 Yr SW S&S
00MT202	1340	Lenovo XClarity Pro, per Managed Endpoint w/3 Yr SW S&S
00MT203	1341	Lenovo XClarity Pro, per Managed Endpoint w/5 Yr SW S&S
7S0X000HWW	SAYV	Lenovo XClarity Pro, per Managed Endpoint w/6 Yr SW S&S
7S0X000JWW	SAYW	Lenovo XClarity Pro, per Managed Endpoint w/7 Yr SW S&S

Lenovo XClarity Administrator offers the following standard features that are available at no charge:

- Auto-discovery and monitoring of Lenovo systems
- Firmware updates and compliance enforcement
- External alerts and notifications via SNMP traps, syslog remote logging, and e-mail
- Secure connections to managed endpoints
- NIST 800-131A or FIPS 140-3 compliant cryptographic standards between the management solution and managed endpoints
- Integration into existing higher-level management systems such as cloud automation and orchestration tools through REST APIs, providing extensive external visibility and control over hardware resources
- An intuitive, easy-to-use GUI
- Scripting with Windows PowerShell, providing command-line visibility and control over hardware resources

Lenovo XClarity Administrator offers the following premium features that require an optional Pro license:

- Pattern-based configuration management that allows to define configurations once and apply repeatedly without errors when deploying new servers or redeploying existing servers without disrupting the fabric
- Bare-metal deployment of operating systems and hypervisors to streamline infrastructure provisioning

For more information, refer to the Lenovo XClarity Administrator Product Guide:

<http://lenovopress.com/tips1200>

Lenovo XClarity Integrators

Lenovo also offers software plug-in modules, Lenovo XClarity Integrators, to manage physical infrastructure from leading external virtualization management software tools including those from Microsoft and VMware.

These integrators are offered at no charge, however if software support is required, a Lenovo XClarity Pro software subscription license should be ordered.

Lenovo XClarity Integrators offer the following additional features:

- Ability to discover, manage, and monitor Lenovo server hardware from VMware vCenter or Microsoft System Center
- Deployment of firmware updates and configuration patterns to Lenovo x86 [rack servers](#) and Flex System from the virtualization management tool
- Non-disruptive server maintenance in clustered environments that reduces workload downtime by dynamically migrating workloads from affected hosts during rolling server updates or reboots
- Greater service level uptime and assurance in clustered environments during unplanned hardware events by dynamically triggering workload migration from impacted hosts when impending hardware failures are predicted

For more information about all the available Lenovo XClarity Integrators, see the Lenovo XClarity Administrator Product Guide: <https://lenovopress.com/tips1200-lenovo-xclarity-administrator>

Lenovo XClarity Essentials

Lenovo offers the following XClarity Essentials software tools that can help you set up, use, and maintain the server at no additional cost:

- **Lenovo Essentials OneCLI**
OneCLI is a collection of server management tools that uses a command line interface program to manage firmware, hardware, and operating systems. It provides functions to collect full system health information (including health status), configure system settings, and update system firmware and drivers.
- **Lenovo Essentials UpdateXpress**
The UpdateXpress tool is a standalone GUI application for firmware and device driver updates that enables you to maintain your server firmware and device drivers up-to-date and help you avoid unnecessary server outages. The tool acquires and deploys individual updates and UpdateXpress System Packs (UXSPs) which are integration-tested bundles.
- **Lenovo Essentials Bootable Media Creator**
The Bootable Media Creator (BOMC) tool is used to create bootable media for offline firmware update.

ThinkSystem V4 servers: The format of UEFI and BMC settings has changed for ThinkSystem V4 servers, to align with OpenBMC and Redfish requirements. See the documentation of these tools for details. As a result, the following versions are required for these servers:

- OneCLI 5.x or later
- UpdateXpress 5.x or later
- BOMC 14.x or later

For more information and downloads, visit the Lenovo XClarity Essentials web page: <http://support.lenovo.com/us/en/documents/LNVO-center>

Lenovo XClarity Energy Manager

Lenovo XClarity Energy Manager (LXEM) is a power and temperature management solution for data centers. It is an agent-free, web-based console that enables you to monitor and manage power consumption and temperature in your data center through the management console. It enables server density and data center capacity to be increased through the use of power capping.

LXEM is a licensed product. A single-node LXEM license is included with the XClarity Controller Premier upgrade as described in the [XCC3 Premier](#) section. If your server does not have the XCC Premier upgrade, Energy Manager licenses can be ordered as shown in the following table.

Table 70. Lenovo XClarity Energy Manager

Part number	Description
4L40E51621	Lenovo XClarity Energy Manager Node License (1 license needed per server)

For more information about XClarity Energy Manager, see the following resources:

- Lenovo Support page:
<https://datacentersupport.lenovo.com/us/en/solutions/Invo-lxem>
- User Guide for XClarity Energy Manager:
<https://pubs.lenovo.com/lxem/>

Lenovo Capacity Planner

Lenovo Capacity Planner is a power consumption evaluation tool that enhances data center planning by enabling IT administrators and pre-sales professionals to understand various power characteristics of racks, servers, and other devices. Capacity Planner can dynamically calculate the power consumption, current, British Thermal Unit (BTU), and volt-ampere (VA) rating at the rack level, improving the planning efficiency for large scale deployments.

For more information, refer to the Capacity Planner web page:
<http://datacentersupport.lenovo.com/us/en/solutions/Invo-lcp>

Security

Topics in this section:

- [Security features](#)
- [Platform Firmware Resiliency - Lenovo ThinkShield](#)
- [Security standards](#)

Security features

The SR650a V4 server offers the following electronic security features:

- Secure Boot function of the Intel Xeon processor
- Support for Platform Firmware Resiliency (PFR) hardware Root of Trust (RoT) - see the [Platform Firmware Resiliency](#) section
- Firmware signature processes compliant with FIPS and NIST requirements
- System Guard (part of [XCC3 Premier](#)) - Proactive monitoring of hardware inventory for unexpected component changes
- Administrator and power-on password
- Integrated Trusted Platform Module (TPM) supporting TPM 2.0
- For China users, optional Nationz TPM 2.0 module
- Self-encrypting drives (SEDs) with support for enterprise key managers - see the [SED encryption key management](#) section

The server is NIST SP 800-147B compliant.

The SR650a V4 server also offers the following optional physical security features:

- Optional chassis intrusion switch

Note: The SR650a V4 does not support the front security bezel.

The following table lists the security options for the SR650a V4.

Table 71. Security features

Part number	Feature code	Description
4X97B03890	C3QT	ThinkSystem SR650/a V4 Intrusion Cable kit
CTO only	C8UF	ThinkSystem V4 PRC NationZ TPM 2.0 Module

Platform Firmware Resiliency - Lenovo ThinkShield

Lenovo's ThinkShield Security is a transparent and comprehensive approach to security that extends to all dimensions of our data center products: from development, to supply chain, and through the entire product lifecycle.

The ThinkSystem SR650a V4 includes Platform Firmware Resiliency (PFR) hardware Root of Trust (RoT) which enables the system to be NIST SP800-193 compliant. This offering further enhances key platform subsystem protections against unauthorized firmware updates and corruption, to restore firmware to an integral state, and to closely monitor firmware for possible compromise from cyber-attacks.

PFR operates upon the following server components:

- UEFI image – the low-level server firmware that connects the operating system to the server hardware
- XCC image – the management “engine” software that controls and reports on the server status separate from the server operating system
- FPGA image – the code that runs the server’s lowest level hardware controller on the motherboard

The Lenovo Platform Root of Trust Hardware performs the following three main functions:

- Detection – Measures the firmware and updates for authenticity
- Recovery – Recovers a corrupted image to a known-safe image
- Protection – Monitors the system to ensure the known-good firmware is not maliciously written

These enhanced protection capabilities are implemented using a dedicated, discrete security processor whose implementation has been rigorously validated by leading third-party security firms. Security evaluation results and design details are available for customer review – providing unprecedented transparency and assurance.

The SR650a V4 includes support for Secure Boot, a UEFI firmware security feature developed by the UEFI Consortium that ensures only immutable and signed software are loaded during the boot time. The use of Secure Boot helps prevent malicious code from being loaded and helps prevent attacks, such as the installation of rootkits. Lenovo offers the capability to enable secure boot in the factory, to ensure end-to-end protection. Alternatively, Secure Boot can be left disabled in the factory, allowing the customer to enable it themselves at a later point, if desired.

The following table lists the relevant feature code(s).

Table 72. Secure Boot options

Part number	Feature code	Description	Purpose
CTO only	BPKQ	TPM 2.0 with Secure Boot	Configure the system in the factory with Secure Boot enabled.
CTO only	BPKR	TPM 2.0	Configure the system without Secure Boot enabled. Customers can enable Secure Boot later if desired.

Tip: If Secure Boot is not enabled in the factory, it can be enabled later by the customer. However once Secure Boot is enabled, it cannot be disabled.

Security standards

The SR650a V4 supports the following security standards and capabilities:

- **Industry Standard Security Capabilities**
 - Intel CPU Enablement
 - Intel Trust Domain Extensions (Intel TDX)
 - Intel Crypto Acceleration
 - Intel QuickAssist Software Acceleration
 - Intel Platform Firmware Resilience Support
 - Intel Control-Flow Enforcement Technology
 - Intel Total Memory Encryption - Multi Key
 - Intel Total Memory Encryption
 - Intel AES New Instructions (AES-NI)
 - Intel OS Guard
 - Execute Disable Bit (XD)
 - Intel Boot Guard
 - Mode-based Execute Control (MBEC)
 - Intel Virtualization Technology (VT-x)
 - Intel Virtualization Technology for Directed I/O (VT-d)
 - Microsoft Windows Security Enablement
 - Credential Guard
 - Device Guard
 - Host Guardian Service
 - TCG (Trusted Computing Group) TPM (Trusted Platform Module) 2.0
 - UEFI (Unified Extensible Firmware Interface) Forum Secure Boot
- **Hardware Root of Trust and Security**
 - Independent security subsystem providing platform-wide NIST SP800-193 compliant Platform Firmware Resilience (PFR)
 - Management domain RoT supplemented by the Secure Boot features of XCC
- **Platform Security**
 - Boot and run-time firmware integrity monitoring with rollback to known-good firmware (e.g., “self-healing”)
 - Non-volatile storage bus security monitoring and filtering
 - Resilient firmware implementation, such as to detect and defeat unauthorized flash writes or SMM (System Management Mode) memory incursions
 - Patented IPMI KCS channel privileged access authorization (USPTO Patent# 11,256,810)
 - Host and management domain authorization, including integration with CyberArk for enterprise

password management

- KMIP (Key Management Interoperability Protocol) compliant, including support for IBM SKLM and Thales KeySecure
- Reduced “out of box” attack surface
- Configurable network services

For more information on platform security, see the paper “How to Harden the Security of your ThinkSystem Server and Management Applications” available from <https://lenovopress.com/lp1260-how-to-harden-the-security-of-your-thinksystem-server>.

- **Standards Compliance and/or Support**

- NIST SP800-131A rev 2 “Transitioning the Use of Cryptographic Algorithms and Key Lengths”
- NIST SP800-147B “BIOS Protection Guidelines for Servers”
- NIST SP800-193 “Platform Firmware Resiliency Guidelines”
- ISO/IEC 11889 “Trusted Platform Module Library”
- Common Criteria TCG Protection Profile for “PC Client Specific TPM 2.0”
- European Union Commission Regulation 2019/424 (“ErP Lot 9”) “Ecodesign Requirements for Servers and Data Storage Products” Secure Data Deletion
- Optional FIPS 140-2 validated Self-Encrypting Disks (SEDs) with external KMIP-based key management

- **Product and Supply Chain Security**

- Suppliers validated through Lenovo’s Trusted Supplier Program
- Developed in accordance with Lenovo’s Secure Development Lifecycle (LSDL)
- Continuous firmware security validation through automated testing, including static code analysis, dynamic network and web vulnerability testing, software composition analysis, and subsystem-specific testing, such as UEFI security configuration validation
- Ongoing security reviews by US-based security experts, with attestation letters available from our third-party security partners
- Digitally signed firmware, stored and built on US-based infrastructure and signed on US-based Hardware Security Modules (HSMs)
- TAA (Trade Agreements Act) compliant manufacturing, by default in Mexico for North American markets with additional US and EU manufacturing options
- US 2019 NDAA (National Defense Authorization Act) Section 889 compliant

Rack installation

The following table lists the rack installation options that are available for the SR650a V4.

For supported racks, see the [Rack cabinets](#) section.

Table 73. Rack installation options

Part number	Feature Code	Description	CMA support
Rail kits			
4XF7A97379	C2DG	ThinkSystem Toolless Friction Rail V4	No support
4XF7A97370	C2DH	ThinkSystem Toolless Slide Rail Kit V4	Optional
4XF7A97374	C3QS	ThinkSystem Toolless Slide Rail Kit V4 with 2U CMA	Included
4XF7A97371	C2DJ	ThinkSystem Advanced Toolless Slide Rail Kit V4	Optional
4XF7A97376	C3UF	ThinkSystem Advanced Toolless Slide Rail Kit V4 with 2U CMA	Included
Cable management arm for field upgrades (for CTO orders, use one of the above kits with CMA included)			
7M27A05698	-	ThinkSystem 2U CMA Upgrade Kit for Toolless Slide Rail	Yes

See the Rail Kit comparison for the specifications of each rail kit:

<https://lenovopress.lenovo.com/lp1838-thinksystem-and-thinkedge-rail-kit-reference#availability=Available&sr650-v4-support=SR650%2520V4>

Tip: The Advanced rail kits add support for threaded mounting holes.

Operating system support

The SR650a V4 supports the following operating systems:

- Microsoft Windows Server 2022
- Microsoft Windows Server 2025
- Red Hat Enterprise Linux 9.4
- Red Hat Enterprise Linux 9.5
- SUSE Linux Enterprise Server 15 SP6
- Ubuntu 22.04 LTS 64-bit
- Ubuntu 24.04 LTS 64-bit
- VMware ESXi 8.0 U3

For configure-to-order configurations, the SR650a V4 can be preloaded with VMware ESXi. Ordering information is listed in the following table.

Table 74. VMware ESXi preload

Part number	Feature code	Description
-------------	--------------	-------------

Configuration rule:

- An ESXi preload cannot be selected if the configuration includes an NVIDIA GPU (ESXi preload cannot include the NVIDIA driver)

You can download supported VMware vSphere hypervisor images from the following web page and install it using the instructions provided:

https://vmware.lenovo.com/content/custom_iso/

For a complete list of supported, certified and tested operating systems, plus additional details and links to relevant web sites, see the Operating System Interoperability Guide: <https://lenovopress.lenovo.com/osig>

Physical and electrical specifications

The SR650a V4 has the following overall physical dimensions, excluding components that extend outside the standard chassis, such as EIA flanges, front security bezel (if any), and power supply handles:

- Width: 445 mm (17.5 inches)
- Height: 87 mm (3.4 inches)
- Depth: 924 mm (36.4 inches)

The following table lists the detailed dimensions. See the figure below for the definition of each dimension.

Table 75. Detailed dimensions

Dimension	Description
482 mm	X_a = Width, to the outsides of the front EIA flanges
435 mm	X_b = Width, to the rack rail mating surfaces
445 mm	X_c = Width, to the outer most chassis body feature
87 mm	Y_a = Height, from the bottom of chassis to the top of the chassis
851 mm	Z_a = Depth, from the rack flange mating surface to the rearmost I/O port surface
889 mm	Z_b = Depth, from the rack flange mating surface to the rearmost feature of the chassis body
880 mm	Z_c = Depth, from the rack flange mating surface to the rearmost feature such as power supply handle
35 mm	Z_d = Depth, from the forwardmost feature on front of EIA flange to the rack flange mating surface
51 mm	Z_e = Depth, from the front of security bezel (if applicable) or forwardmost feature to the rack flange mating surface

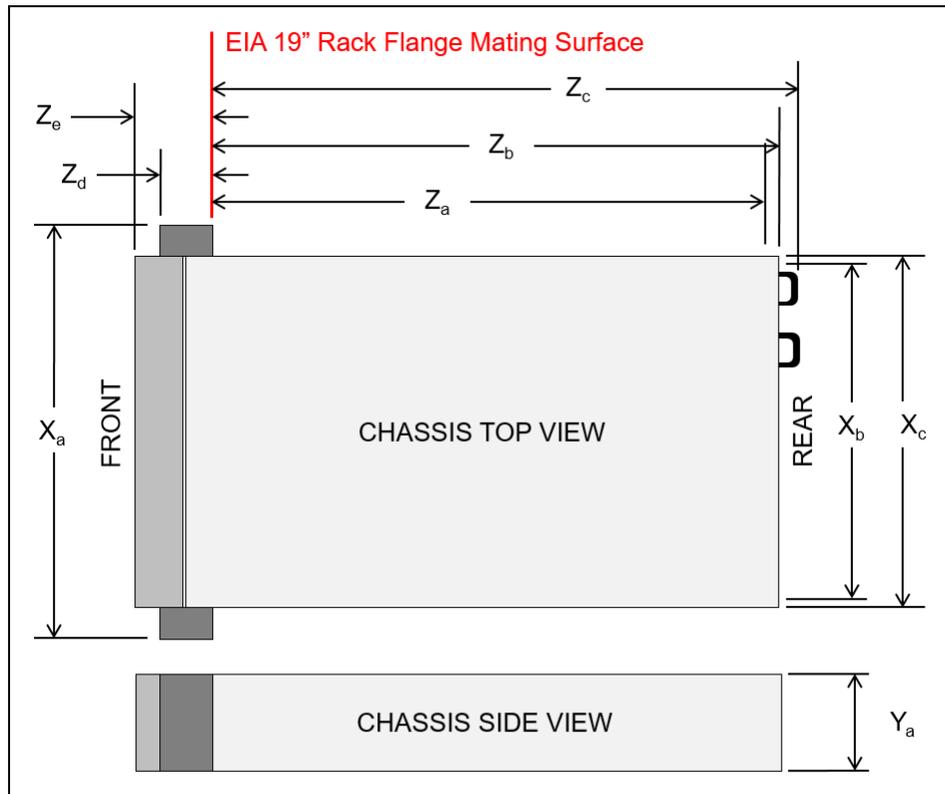


Figure 28. Server dimensions

The shipping (cardboard packaging) dimensions of the SR650a V4 are as follows:

- Width: 584 mm (23.0 inches)
- Height: 270 mm (10.6 inches)
- Depth: 1150 mm (45.3 inches)

The server has the following weight:

- Maximum weight: 38.8 kg (85.5 lb)

The server has the following electrical specifications for AC input power supplies:

- Input voltage:
 - 100 to 127 (nominal) Vac, 50 Hz or 60 Hz
 - 200 to 240 (nominal) Vac, 50 Hz or 60 Hz
 - 180 to 300 Vdc (China only)
- Inlet current: see the following table.

Table 76. Maximum inlet current

Part number	Description	100V AC	200V AC	240V DC
Titanium AC power supplies				
4P57A88687	ThinkSystem 800W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	9.3A	4.5A	4A
4P57A87056	ThinkSystem 800W 230V/115V Titanium CRPS Hot-Swap Power Supply v1.4	10A	5A	5A
4P57A88621	ThinkSystem 1300W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	11.4A	7.2A	6.2A
4P57A87628	ThinkSystem 1300W 230V/115V Titanium CRPS Hot-Swap Power Supply v2.4	12A	8A	8A
4P57A88689	ThinkSystem 2000W 230V/115V Titanium CRPS Premium Hot-Swap Power Supply	No support	11A	9.1A
Platinum AC power supplies				
4P57A89306	ThinkSystem 800W 230V/115V Platinum CRPS Hot-Swap Power Supply v1.5	10A	5A	4.5A
4P57A89307	ThinkSystem 1300W 230V/115V Platinum CRPS Hot-Swap Power Supply v1.5	12A	8A	6.5A
4P57A88636	ThinkSystem 1300W 230V/115V Platinum CRPS Hot-Swap Power Supply v2.4	12A	8A	8A
HVAC/HVDC power supplies				
4P57A88627	ThinkSystem 1300W HVAC/HVDC Platinum CRPS Premium Hot-Swap Power Supply	No support	7.2A	6.2A

Electrical specifications for -48V DC input power supply, 4P57A88625:

- Input voltage: -48 to -60 Vdc
- Inlet current: 29.8 A

Electrical specifications for HVAC/HVDC power supply, 4P57A88627:

- Input voltage ranges:
 - 200-277V AC single phase
 - 240-380V DC
- Inlet current:

- AC: 7.2 A
- DC: 6.2 A

Operating environment

The SR650a V4 server complies with ASHRAE Class A2 specifications with most configurations, and depending on the hardware configuration, also complies with ASHRAE Class A3 and Class A4 specifications. System performance may be impacted when operating temperature is outside ASHRAE A2 specification.

Depending on the hardware configuration, the SR650a V4 server also complies with ASHRAE Class H1 specification. System performance may be impacted when operating temperature is outside ASHRAE H1 specification.

Topics in this section:

- [Temperature and humidity](#)
- [Acoustical noise emissions](#)
- [Shock and vibration](#)
- [Particulate contamination](#)

Water requirements

The SR650a V4 has the following requirements for open-loop liquid cooling:

- Maximum pressure: 3 bars
- Water inlet temperature and flow rates:
 - 50°C (122°F) inlet temperature: 1.5 liters per minute (lpm) per server
 - 45°C (113°F) inlet temperature: 1 liter per minute (lpm) per server
 - 40°C (104°F) or lower inlet temperature: 0.5 liters per minute (lpm) per server

The water required to initially fill the system side cooling loop must be reasonably clean, bacteria-free water (<100 CFU/ml) such as de-mineralized water, reverse osmosis water, de-ionized water, or distilled water. The water must be filtered with an in-line 50 micron filter (approximately 288 mesh). The water must be treated with anti-biological and anti-corrosion measures. Environment quality must be maintain over the lifetime of the system to receive warranty and support on affecting components. For more information, see [Lenovo Neptune Direct Water-Cooling Standards](#).

Temperature and humidity

The server is supported in the following environment:

- Air temperature:
 - Operating:
 - ASHRAE Class A2: 10°C to 35°C (50°F to 95°F); the maximum ambient temperature decreases by 1°C for every 300 m (984 ft) increase in altitude above 900 m (2,953 ft).
 - ASHRAE Class A3: 5°C to 40°C (41°F to 104°F); the maximum ambient temperature decreases by 1°C for every 175 m (574 ft) increase in altitude above 900 m (2,953 ft).
 - ASHRAE Class A4: 5°C to 45°C (41°F to 113°F); the maximum ambient temperature decreases by 1°C for every 125 m (410 ft) increase in altitude above 900 m (2,953 ft).
 - ASHRAE Class H1: 5 °C to 25 °C (41 °F to 77 °F); Decrease the maximum ambient temperature by 1°C for every 500 m (1640 ft) increase in altitude above 900 m (2,953 ft).
 - Server off: -10°C to 60°C (14°F to 140°F)
 - Shipment/storage: -40°C to 70°C (-40°F to 158°F)
- Maximum altitude: 3,050 m (10,000 ft)
- Relative Humidity (non-condensing):
 - Operating
 - ASHRAE Class A2: 8% to 80%; maximum dew point: 21°C (70°F)
 - ASHRAE Class A3: 8% to 85%; maximum dew point: 24°C (75°F)
 - ASHRAE Class A4: 8% to 90%; maximum dew point: 24°C (75°F)

- ASHRAE Class H1: 8% to 80%; Maximum dew point: 17°C (63°F)
- Shipment/storage: 8% to 90%

Acoustical noise emissions

The server has the following acoustic noise emissions declaration.

Table 77. Acoustic noise emissions declaration

Acoustic performance @ 25°C ambient	Configuration	Typical
Declared mean A-weighted sound power level, LWA,m (B) Statistical adder for verification, Kv (B) = 0.4	Idle mode	6.6 Bels
	Operating mode	8.5 Bels
Declared mean A-weighted emission sound pressure level, LpA,m (dB) Bystander position	Idle mode	54 dB
	Operating mode	73 dB

Modes:

- Idle mode: Steady state in which the server is powered on but not operating any intended function.
- Operating mode: 100% GPU with 80% CPU TDP.

The declared acoustic sound levels are based on the following configurations, which may change depending on configuration or conditions.

- **Typical:** GPU chassis, 6*Ultra 6056 fans, 2 x 350 W CPUs, 4x H100 NVL 400W GPUs, 16 x 64 GB RDIMMs, 8 x 2.5" NVME 3.84TB HDDs, 2 x ThinkSystem Broadcom 57508 100GbE QSFP56 2-Port OCP Ethernet Adapter, 2 x 2700W PSUs

Notes:

- These sound levels were measured in controlled acoustical environments according to procedures specified by ISO7779 and are reported in accordance with ISO 9296.
- The declared sound levels may change depending on configuration/conditions.
- Government regulations (such as those prescribed by OSHA or European Community Directives) may govern noise level exposure in the workplace and may apply to you and your server installation. The actual sound pressure levels in your installation depend upon a variety of factors, including the number of racks in the installation; the size, materials, and configuration of the room; the noise levels from other equipment; the room ambient temperature, and employee's location in relation to the equipment. Further, compliance with such government regulations depends on a variety of additional factors, including the duration of employees' exposure and whether employees wear hearing protection. Lenovo recommends that you consult with qualified experts in this field to determine whether you are in compliance with the applicable regulations.

Shock and vibration

The server has the following vibration and shock limits:

- Vibration:
 - Operating: 0.21 G rms at 5 Hz to 500 Hz for 15 minutes across 3 axes
 - Non-operating: 1.04 G rms at 2 Hz to 200 Hz for 15 minutes across 6 surfaces
- Shock:
 - Operating: 15 G for 3 milliseconds in each direction (positive and negative X, Y, and Z axes)
 - Non-operating:
 - 12 kg - 22 kg: 50 G for 152 in./sec velocity change across 6 surfaces
 - 23 kg - 31 kg: 35 G for 152 in./sec velocity change across 6 surfaces
 - 32 kg - 68 kg: 35 G for 136 in./sec velocity change across 6 surfaces

Particulate contamination

Airborne particulates (including metal flakes or particles) and reactive gases acting alone or in combination with other environmental factors such as humidity or temperature might damage the system that might cause the system to malfunction or stop working altogether.

The following specifications indicate the limits of particulates that the system can tolerate:

- Reactive gases:
 - The copper reactivity level shall be less than 200 Angstroms per month (Å/month)
 - The silver reactivity level shall be less than 200 Å/month
- Airborne particulates:
 - The room air should be continuously filtered with MERV 8 filters.
 - Air entering a data center should be filtered with MERV 11 or preferably MERV 13 filters.
 - The deliquescent relative humidity of the particulate contamination should be more than 60% RH
 - Environment must be free of zinc whiskers

For additional information, see the Specifications section of the documentation for the server, available from the Lenovo Documents site, <https://pubs.lenovo.com/>

Water infrastructure for the Lenovo Processor Neptune Core Module

The Lenovo Processor Neptune Core Module is the liquid-based processor cooling offering for the SR650a V4, as described in the [Lenovo Processor Neptune Core Module](#) section.

The open-loop cooling module requires the following water infrastructure components in the rack cabinet and data center:

- Supported 42U or 48U rack cabinet

The 42U or 48U Heavy Duty Rack Cabinet (machine types 7D6D or 7D6E) are supported. Two 0U mounting points are required for the water manifolds, at the rear of the rack cabinet, one either side.

For information about the 42U and 48U Heavy Duty Rack Cabinets, see the product guide: <https://lenovopress.lenovo.com/lp1498-lenovo-heavy-duty-rack-cabinets>
- 38-port water manifold (machine type 7DE6), installed in the rear of the rack cabinet

The manifold provides quick-disconnect couplings that each server in the rack are connected to. Ordering information is in the table below.
- Coolant distribution unit (CDU), either in-rack or in-row

In-rack CDUs are installed at the bottom of the rack cabinet. The supported in-rack CDU is as follows:

 - Lenovo Neptune DWC RM100 In-Rack CDU; see the [RM100 In-Rack Coolant Distribution Unit](#) section

In-row CDUs are separate cabinets that are typically installed at the end of a row of rack cabinets. Examples of suitable in-row CDUs include (but not limited to):

 - CoolTera FS400 310KW CDU
 - Vertiv Liebert XDU60 60KW CDU
- Hose kit to connect to the CDU to the manifold

Ordering information is in the table below.

The following figure shows the major components of the solution.

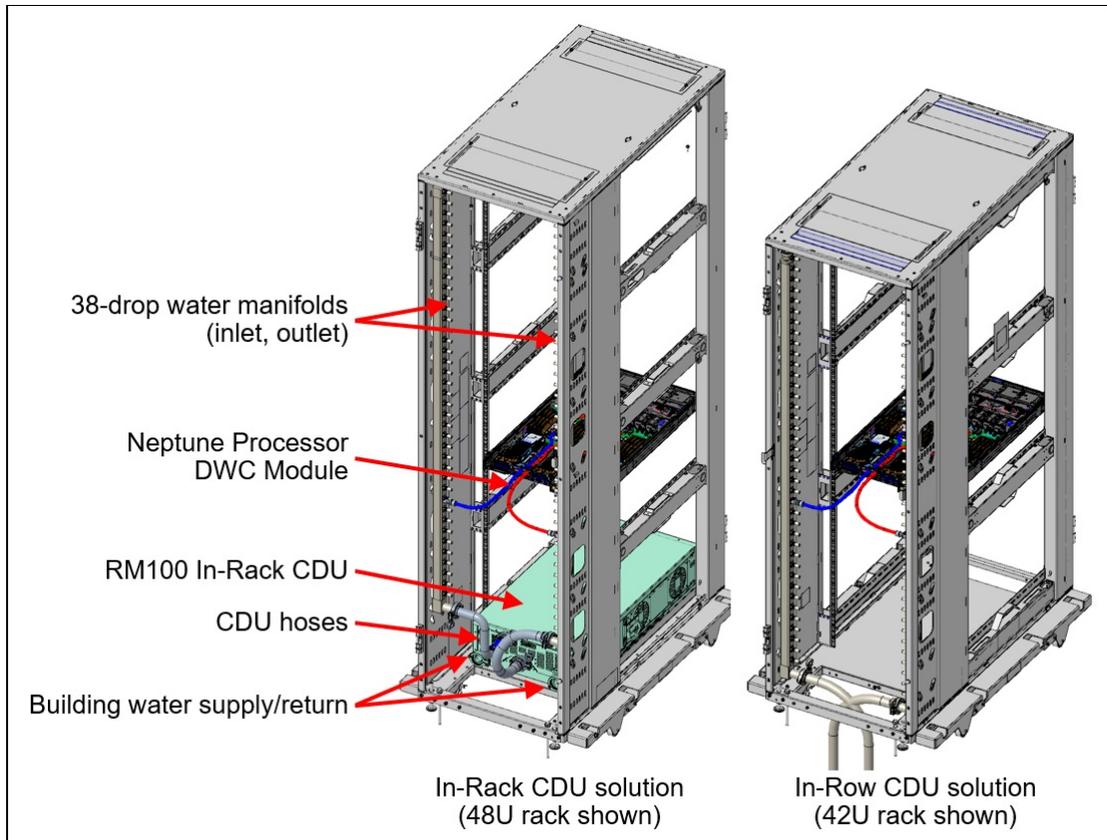


Figure 29. Water manifold connections

Configuration requirements:

- Maximum number of SR650a V4 servers supported in a rack:
 - 48U rack: 19 servers
 - 42U rack with in-rack CDU: 18 servers
 - 42U rack without in-rack CDU: 19 servers
- Inlet water flow rate:
 - 0.5 LPM: Maximum 40°C inlet water temperature
 - 1.0 LPM: Maximum 45°C inlet water temperature
 - 1.5 LPM: Maximum 50°C inlet water temperature
- Water pressure requirement:
 - Maximum operating node inlet pressure = 43.5 psi (3 bars)

Note: Water quality must be maintained over the lifetime of the system to receive warranty and support on affecting components. For water quality requirement, see [Lenovo Neptune Direct Water-Cooling Standards](#)

The 38-drop water manifold and hoses can be ordered as listed in the following table.

Table 78. Water infrastructure ordering information

Part number	Feature code	Description
Manifold for 42U and 48U rack cabinet		
4XF7A90061	C5YW	ThinkSystem Neptune DWC 38 Port Rack Manifold
Hoses to connect the manifold to an in-rack CDU		
4XF7A90232	C5YX	Connection Set - 38/45 Ports Manifold with in-rack CDU
4XF7A90233	C5YY	Connection Set, for 38 Ports manifold with in-Rack CDU in 48U Rack
Hoses to connect the manifold to an in-row CDU		
4XF7A90234	C5YZ	Hose Set, 1 inch EPDM, 1.3m, for 38 Ports manifold for in-row CDU
4XF7A90235	C5Z0	Hose Set, 1 inch EPDM, 2.3m, for 38 Ports manifold for in-row CDU

Configuration notes:

- This water connection solution described here cannot be used with the DW612S and N1380 enclosures as the water requirements are different.
- The hoses for in-row CDUs that are listed in the table above have Eaton FD83 quick-disconnect couplings

RM100 In-Rack Coolant Distribution Unit

The RM100 In-Rack Coolant Distribution Unit (CDU) can provide 100kW cooling capacity within the rack cabinet. It is designed as a 4U high rack device installed at the bottom of the rack. The CDU is supported in the 42U and 48U Heavy Duty Rack Cabinets.

For information about the 42U and 48U Heavy Duty Rack Cabinets, see the product guide: <https://lenovopress.lenovo.com/lp1498-lenovo-heavy-duty-rack-cabinets>

The following figure shows the RM100 CDU.



Figure 30. RM100 In-Rack Coolant Distribution Unit

The CDU can be ordered using the CTO process in the configurators using machine type 7DBL. The following table lists the base CTO model and base feature code.

Table 79. RM100 ordering information

CTO model	Base feature	Description
7DBLCTOLWW	BRL4	Lenovo Neptune DWC RM100 In-Rack CDU

For details and exact specification of the CDU, see the In-Rack CDU Operation & Maintenance Guide: https://pubs.lenovo.com/hdc_rackcabinet/rm100_user_guide.pdf

Professional Services: The factory integration of the In-Rack CDU requires Lenovo Professional Services review and approval for warranty and associated extended services. Before ordering CDU and manifold, contact the Lenovo Professional Services team (CDUsupport@lenovo.com).

Warranty upgrades and post-warranty support

The SR650a V4 has a 1-year or 3-year warranty based on the machine type of the system:

- 7DGC - 1 year warranty
- 7DGD - 3 year warranty

Our global network of regional support centers offers consistent, local-language support enabling you to vary response times and level of service to match the criticality of your support needs:

- **Standard Next Business Day** – Best choice for non-essential systems requiring simple maintenance.
- **Premier Next Business Day** – Best choice for essential systems requiring technical expertise from senior-level Lenovo engineers.
- **Premier 24x7 4-Hour Response** – Best choice for systems where maximum uptime is critical.
- **Premier Enhanced Storage Support 24x7 4-Hour Response** – Best choice for storage systems where maximum uptime is critical.

For more information, consult the brochure [Lenovo Operational Support Services for Data Centers Services](#).

Services

Lenovo Data Center Services empower you at every stage of your IT lifecycle. From expert advisory and strategic planning to seamless deployment and ongoing support, we ensure your infrastructure is built for success. Our comprehensive services accelerate time to value, minimize downtime, and free your IT staff to focus on driving innovation and business growth.

Note: Some service options may not be available in all markets or regions. For more information, go to <https://lenovolocator.com/>. For information about Lenovo service upgrade offerings that are available in your region, contact your local Lenovo sales representative or business partner.

In this section:

- [Lenovo Advisory Services](#)
- [Lenovo Plan & Design Services](#)
- [Lenovo Deployment, Migration, and Configuration Services](#)
- [Lenovo Support Services](#)
- [Lenovo Managed Services](#)
- [Lenovo Sustainability Services](#)

Lenovo Advisory Services

Lenovo Advisory Services simplify the planning process, enabling customers to build future-proofed strategies in as little as six weeks. Consultants provide guidance on projects including VM migration, storage, backup and recovery, and cost management to accelerate time to value, improve cost efficiency, and build a flexibly scalable foundation.

- **Assessment Services**

An Assessment helps solve your IT challenges through an onsite, multi-day session with a Lenovo technology expert. We perform a tools-based assessment which provides a comprehensive and thorough review of a company's environment and technology systems. In addition to the technology based functional requirements, the consultant also discusses and records the non-functional business requirements, challenges, and constraints. Assessments help organizations like yours, no matter how large or small, get a better return on your IT investment and overcome challenges in the ever-changing technology landscape.

- **Design Services**

Professional Services consultants perform infrastructure design and implementation planning to support your strategy. The high-level architectures provided by the assessment service are turned into low level designs and wiring diagrams, which are reviewed and approved prior to implementation. The implementation plan will demonstrate an outcome-based proposal to provide business capabilities through infrastructure with a risk-mitigated project plan.

Lenovo Plan & Design Services

Unlock faster time to market with our tailored, strategic design workshops to align solution approaches with your business goals and technical requirements. Leverage our deep solution expertise and end-to-end delivery partnership to meet your goals efficiently and effectively.

Lenovo Deployment, Migration, and Configuration Services

Optimize your IT operations by shifting labor-intensive functions to Lenovo's skilled technicians for seamless on-site or remote deployment, configuration, and migration. Enjoy peace of mind, faster time to value, and comprehensive knowledge sharing with your IT staff, backed by our best-practice methodology.

- **Deployment Services for Storage and ThinkAgile**

A comprehensive range of remote and onsite options tailored specifically for your business needs to ensure your storage and ThinkAgile hardware are fully operational from the start.

- **Hardware Installation Services**

A full-range, comprehensive setup for your hardware, including unpacking, inspecting, and positioning components to ensure your equipment is operational and error-free for the most seamless and efficient installation experience, so you can quickly benefit from your investments.

- **DM/DG File Migration Services**

Take the burden of file migration from your IT's shoulders. Our experts will align your requirements and business objectives to the migration plans while coordinating with your team to plan and safely execute the data migration to your storage platforms.

- **DM/DG/DE Health Check Services**

Our experts perform proactive checks of your Firmware and system health to ensure your machines are operating at peak and optimal efficiency to maximize up-time, avoid system failures, ensure the security of IT solutions and simplify maintenance.

- **Factory Integrated Services**

A suite of value-added offerings provided during the manufacturing phase of a server or storage system that reduces time to value. These services aim at improving your hardware deployment experience and enhance the quality of a standard configuration before it arrives at your facility.

Lenovo Support Services

In addition to response time options for hardware parts, repairs, and labor, Lenovo offers a wide array of additional support services to ensure your business is positioned for success and longevity. Our goal is to reduce your capital outlays, mitigate your IT risks, and accelerate your time to productivity.

- **Premier Support for Data Centers**

Your direct line to the solution that promises the best, most comprehensive level of support to help you fully unlock the potential of your data center.

- **Premier Enhanced Storage Support (PESS)**

Gain all the benefits of Premier Support for Data Centers, adding dedicated storage specialists and resources to elevate your storage support experience to the next level.

- **Committed Service Repair (CSR)**

Our commitment to ensuring the fastest, most seamless resolution times for mission-critical systems that require immediate attention to ensure minimal downtime and risk for your business. This service is only available for machines under the Premier 4-Hour Response SLA.

- **Multivendor Support Services (MVS)**

Your single point of accountability for resolution support across vast range of leading Server, Storage, and Networking OEMs, allowing you to manage all your supported infrastructure devices seamlessly from a single source.

- **Keep Your Drive (KYD)**

Protect sensitive data and maintain compliance with corporate retention and disposal policies to ensure your data is always under your control, regardless of the number of drives that are installed in your Lenovo server.

- **Technical Account Manager (TAM)**

Your single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time, ensuring smooth operations and optimized performance as your business grows.

- **Enterprise Software Support (ESS)**

Gain comprehensive, single-source, and global support for a wide range of server operating systems and Microsoft server applications.

For more information, consult the brochure [Lenovo Operational Support Services for Data Centers](#).

Lenovo Managed Services

Achieve peak efficiency, high security, and minimal disruption with Lenovo's always-on Managed Services. Our real-time monitoring, 24x7 incident response, and problem resolution ensure your infrastructure operates seamlessly. With quarterly health checks for ongoing optimization and innovation, Lenovo's remote active monitoring boosts end-user experience and productivity by keeping your data center's hardware performing at its best.

Lenovo Managed Services provides continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of your data center using state-of-the-art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware & OS device driver levels, and software as needed. We'll also maintain records of latest patches, critical updates, and firmware levels, to ensure you systems are providing business value through optimized performance.

Lenovo Sustainability Services

- **Asset Recovery Services**

Lenovo Asset Recovery Services (ARS) provides a secure, seamless solution for managing end-of-life IT assets, ensuring data is safely sanitized while contributing to a more circular IT lifecycle. By maximizing the reuse or responsible recycling of devices, ARS helps businesses meet sustainability goals while recovering potential value from their retired equipment. For more information, see the [Asset Recovery Services offering page](#).

- **CO2 Offset Services**

Lenovo's CO2 Offset Services offer a simple and transparent way for businesses to take tangible action on their IT footprint. By integrating CO2 offsets directly into device purchases, customers can easily support verified climate projects and track their contributions, making meaningful progress toward their sustainability goals without added complexity.

- **Lenovo Certified Refurbished**

Lenovo Certified Refurbished offers a cost-effective way to support IT circularity without compromising on quality and performance. Each device undergoes rigorous testing and certification, ensuring reliable performance and extending its lifecycle. With Lenovo's trusted certification, you gain peace of mind while making a more sustainable IT choice.

Lenovo TruScale

Lenovo TruScale XaaS is your set of flexible IT services that makes everything easier. Streamline IT procurement, simplify infrastructure and device management, and pay only for what you use – so your business is free to grow and go anywhere.

Lenovo TruScale is the unified solution that gives you simplified access to:

- The industry's broadest portfolio – from pocket to cloud – all delivered as a service
- A single-contract framework for full visibility and accountability
- The global scale to rapidly and securely build teams from anywhere
- Flexible fixed and metered pay-as-you-go models with minimal upfront cost
- The growth-driving combination of hardware, software, infrastructure, and solutions – all from one single provider with one point of accountability.

For information about Lenovo TruScale offerings that are available in your region, contact your local Lenovo sales representative or business partner.

Regulatory compliance

The SR650a V4 conforms to the following standards:

- CE, UKCA Mark (EN55032 Class A, EN62368-1, EN55035, EN61000-3-11, EN61000-3-12, (EU) 2019/424, and EN IEC 63000 (RoHS))
- FCC - Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, issue 7, Class A
- CISPR 32, Class A, CISPR 35
- Korea KS C 9832 Class A, KS C 9835
- Japan VCCI, Class A
- Taiwan BSMI CNS15936, Class A; CNS15598-1; Section 5 of CNS15663
- Australia/New Zealand AS/NZS CISPR 32, Class A; AS/NZS 62368.1
- UL Green Guard, UL2819
- [Energy Star 4.0](#)
- EPEAT (NSF/ ANSI 426) Bronze
- Japanese Energy-Saving Act
- EU2019/424 Energy Related Product (ErP Lot9)
- TCO Certified
- China CCC certificate, GB17625.1; GB4943.1; GB/T9254
- China CECP certificate, CQC3135
- China CELP certificate, HJ 2507-2011

External drive enclosures

The server supports attachment to external drive enclosures using a RAID controller with external ports or a SAS host bus adapter. Adapters supported by the server are listed in the [SAS adapters for external storage](#) section.

Note: Information provided in this section is for ordering reference purposes only. For the operating system and adapter support details, refer to the interoperability matrix for a particular storage enclosure that can be found on the Lenovo Data Center Support web site:

<http://datacentersupport.lenovo.com>

Table 80. External drive enclosures

Model	Description
4587HC1	Lenovo Storage D1212 Disk Expansion Enclosure (2U enclosure with 12x LFF drive bays)
4587HC2	Lenovo Storage D1224 Disk Expansion Enclosure (2U enclosure with 24x SFF drive bays)
6413HC1	Lenovo Storage D3284 High Density Expansion Enclosure (5U enclosure with 84x LFF drive bays)
7DAHCTO1WW	Lenovo ThinkSystem D4390 Direct Attached Storage (4U enclosure with 90x LFF drive bays)

For details about supported drives, adapters, and cables, see the following Lenovo Press Product Guides:

- Lenovo Storage D1212 and D1224
<http://lenovopress.lenovo.com/lp0512>
- Lenovo Storage D3284
<http://lenovopress.lenovo.com/lp0513>
- Lenovo ThinkSystem D4390
<https://lenovopress.lenovo.com/lp1681>

External storage systems

Lenovo offers the ThinkSystem DE Series, ThinkSystem DG Series and ThinkSystem DM Series external storage systems for high-performance storage. See the DE Series, DG Series and DM Series product guides for specific controller models, expansion enclosures and configuration options:

- ThinkSystem DE Series Storage
<https://lenovopress.com/storage/thinksystem/de-series#rt=product-guide>
- ThinkSystem DM Series Storage
<https://lenovopress.com/storage/thinksystem/dm-series#rt=product-guide>
- ThinkSystem DG Series Storage
<https://lenovopress.com/storage/thinksystem/dg-series#rt=product-guide>

External backup units

The following table lists the external backup options that are offered by Lenovo.

Table 81. External backup options

Part number	Description
External RDX USB drives	
4T27A10725	ThinkSystem RDX External USB 3.0 Dock
External SAS tape backup drives	
6160S7E	IBM TS2270 Tape Drive Model H7S
6160S8E	IBM TS2280 Tape Drive Model H8S
6160S9E	IBM TS2290 Tape Drive Model H9S
External SAS tape backup autoloaders	
6171S7R	IBM TS2900 Tape Autoloader w/LTO7 HH SAS
6171S8R	IBM TS2900 Tape Autoloader w/LTO8 HH SAS
6171S9R	IBM TS2900 Tape Autoloader w/LTO9 HH SAS
External tape backup libraries	
6741A1F	IBM TS4300 3U Tape Library-Base Unit
6741A3F	IBM TS4300 3U Tape Library-Expansion Unit
Full High 8 Gb Fibre Channel for TS4300	
01KP938	LTO 7 FH Fibre Channel Drive
01KP954	LTO 8 FH Fibre Channel Drive
02JH837	LTO 9 FH Fibre Channel Drive
Half High 8 Gb Fibre Channel for TS4300	
01KP936	LTO 7 HH Fibre Channel Drive
01KP952	LTO 8 HH Fibre Channel Drive
02JH835	LTO 9 HH Fibre Channel Drive
Half High 6 Gb SAS for TS4300	
01KP937	LTO 7 HH SAS Drive
01KP953	LTO 8 HH SAS Drive
02JH836	LTO 9 HH SAS Drive

For more information, see the list of Product Guides in the Backup units category:

<https://lenovopress.com/servers/options/backup>

Fibre Channel SAN switches

Lenovo offers the ThinkSystem DB Series of Fibre Channel SAN switches for high-performance storage expansion. See the DB Series product guides for models and configuration options:

- ThinkSystem DB Series SAN Switches:
<https://lenovopress.com/storage/switches/rack#rt=product-guide>

Uninterruptible power supply units

The following table lists the uninterruptible power supply (UPS) units that are offered by Lenovo.

Table 82. Uninterruptible power supply units

Part number	Description
Rack-mounted or tower UPS units - 100-125VAC	
7DD5A001WW	RT1.5kVA 2U Rack or Tower UPS-G2 (100-125VAC)
7DD5A003WW	RT3kVA 2U Rack or Tower UPS-G2 (100-125VAC)
Rack-mounted or tower UPS units - 200-240VAC	
7DD5A002WW	RT1.5kVA 2U Rack or Tower UPS-G2 (200-240VAC)
7DD5A005WW	RT3kVA 2U Rack or Tower UPS-G2 (200-240VAC)
7DD5A007WW	RT5kVA 3U Rack or Tower UPS-G2 (200-240VAC)
7DD5A008WW	RT6kVA 3U Rack or Tower UPS-G2 (200-240VAC)
7DD5A00AWW	RT11kVA 6U Rack or Tower UPS-G2 (200-240VAC)

† Only available in China and the Asia Pacific market.

For more information, see the list of Product Guides in the UPS category:

<https://lenovopress.com/servers/options/ups>

Power distribution units

The following table lists the power distribution units (PDUs) that are offered by Lenovo.

Table 83. Power distribution units

Part number	Feature code	Description	ANZ	ASEAN	Brazil	EET	MEA	RUCIS	WE	HTK	INDIA	JAPAN	LA	NA	PRC
0U Basic PDUs															
4PU7A93176	C0QH	0U 36 C13 and 6 C19 Basic 32A 1 Phase PDU v2	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93169	C0DA	0U 36 C13 and 6 C19 Basic 32A 1 Phase PDU	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93177	C0QJ	0U 24 C13/C15 and 24 C13/C15/C19 Basic 32A 3 Phase WYE PDU v2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4PU7A93170	C0D9	0U 24 C13/C15 and 24 C13/C15/C19 Basic 32A 3 Phase WYE PDU	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
0U Switched and Monitored PDUs															
4PU7A93181	C0QN	0U 21 C13/C15 and 21 C13/C15/C19 Switched and Monitored 48A 3 Phase Delta PDU v2 (60A derated)	N	Y	N	N	N	N	N	Y	N	Y	N	Y	N
4PU7A93174	C0D5	0U 21 C13/C15 and 21 C13/C15/C19 Switched and Monitored 48A 3 Phase Delta PDU (60A derated)	N	Y	N	N	N	N	N	Y	N	N	N	Y	N
4PU7A93178	C0QK	0U 20 C13 and 4 C19 Switched and Monitored 32A 1 Phase PDU v2	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93171	C0D8	0U 20 C13 and 4 C19 Switched and Monitored 32A 1 Phase PDU	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93182	C0QP	0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 63A 3 Phase WYE PDU v2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4PU7A93175	C0CS	0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 63A 3 Phase WYE PDU	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93180	C0QM	0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 32A 3 Phase WYE PDU v2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4PU7A93173	C0D6	0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 32A 3 Phase WYE PDU	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y
4PU7A93179	C0QL	0U 16 C13/C15 and 16 C13/C15/C19 Switched and Monitored 24A 1 Phase PDU v2 (30A derated)	N	Y	N	N	N	N	N	Y	N	Y	N	Y	N
4PU7A93172	C0D7	0U 16 C13/C15 and 16 C13/C15/C19 Switched and Monitored 24A 1 Phase PDU(30A derated)	N	Y	N	N	N	N	N	Y	N	N	N	Y	N
1U Switched and Monitored PDUs															
4PU7A90808	C0D4	1U 18 C19/C13 Switched and monitored 48A 3P WYE PDU V2 ETL	N	N	N	N	N	N	N	Y	N	Y	Y	Y	N
4PU7A81117	BNDV	1U 18 C19/C13 switched and monitored 48A 3P WYE PDU - ETL	N	N	N	N	N	N	N	N	N	N	N	Y	N
4PU7A90809	C0DE	1U 18 C19/C13 Switched and monitored 48A 3P WYE PDU V2 CE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y
4PU7A81118	BNDW	1U 18 C19/C13 switched and monitored 48A 3P WYE PDU – CE	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y

Part number	Feature code	Description	ANZ	ASEAN	Brazil	EET	MEA	RUCIS	WE	HTK	INDIA	JAPAN	LA	NA	PRC
4PU7A90810	C0DD	1U 18 C19/C13 Switched and monitored 80A 3P Delta PDU V2	N	N	N	N	N	N	N	Y	N	Y	Y	Y	N
4PU7A77467	BLC4	1U 18 C19/C13 Switched and Monitored 80A 3P Delta PDU	N	N	N	N	N	N	N	N	N	Y	N	Y	N
4PU7A90811	C0DC	1U 12 C19/C13 Switched and monitored 32A 3P WYE PDU V2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4PU7A90812	C0DB	1U 12 C19/C13 Switched and monitored 60A 3P Delta PDU V2	N	N	N	N	N	N	N	Y	N	Y	Y	Y	N
4PU7A77469	BLC6	1U 12 C19/C13 switched and monitored 60A 3P Delta PDU	N	N	N	N	N	N	N	N	N	N	N	Y	N
71763NU	6051	Ultra Density Enterprise C19/C13 PDU 60A/208V/3PH	N	N	Y	N	N	N	N	N	N	Y	Y	Y	N
71762NX	6091	Ultra Density Enterprise C19/C13 PDU Module	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Line cords for 1U PDUs that ship without a line cord															
40K9611	6504	DPI 32a Cord (IEC 309 3P+N+G)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
40K9612	6502	DPI 32a Cord (IEC 309 P+N+G)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
40K9613	6503	DPI 63a Cord (IEC 309 P+N+G)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
40K9614	6500	DPI 30a Cord (NEMA L6-30P)	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
40K9615	6501	DPI 60a Cord (IEC 309 2P+G)	N	N	Y	N	N	N	Y	N	N	Y	Y	Y	N

For more information, see the Lenovo Press documents in the PDU category:
<https://lenovopress.com/servers/options/pdu>

Rack cabinets

The following table lists the supported rack cabinets.

Table 84. Rack cabinets

Model	Description
93072RX	25U Standard Rack (1000mm)
7D6DA007WW	ThinkSystem 42U Onyx Primary Heavy Duty Rack Cabinet (1200mm)
7D6DA008WW	ThinkSystem 42U Pearl Primary Heavy Duty Rack Cabinet (1200mm)
7D6EA009WW	ThinkSystem 48U Onyx Primary Heavy Duty Rack Cabinet (1200mm)
7D6EA00AWW	ThinkSystem 48U Pearl Primary Heavy Duty Rack Cabinet (1200mm)
1410O42	Lenovo EveryScale 42U Onyx Heavy Duty Rack Cabinet
1410P42	Lenovo EveryScale 42U Pearl Heavy Duty Rack Cabinet
1410O48	Lenovo EveryScale 48U Onyx Heavy Duty Rack Cabinet
1410P48	Lenovo EveryScale 48U Pearl Heavy Duty Rack Cabinet
93604PX	42U 1200mm Deep Dynamic Rack
93614PX	42U 1200mm Deep Static Rack
93634PX	42U 1100mm Dynamic Rack
93634EX	42U 1100mm Dynamic Expansion Rack
93074RX	42U Standard Rack (1000mm)

For specifications about these racks, see the Lenovo Rack Cabinet Reference, available from:
<https://lenovopress.com/lp1287-lenovo-rack-cabinet-reference>

For more information, see the list of Product Guides in the Rack cabinets category:
<https://lenovopress.com/servers/options/racks>

KVM console options

The following table lists the supported KVM consoles.

Table 85. KVM console

Part number	Description
4XF7A84188	ThinkSystem 18.5" LCD console (with US English keyboard)

The following table lists the available KVM switches and the options that are supported with them.

Table 87. KVM switches and options

Part number	Description
KVM Console switches	
1754D1X	Global 2x2x16 Console Manager (GCM16)
1754A2X	Local 2x16 Console Manager (LCM16)
1754A1X	Local 1x8 Console Manager (LCM8)
Cables for GCM and LCM Console switches	
46M5383	Virtual Media Conversion Option Gen2 (VCO2)
46M5382	Serial Conversion Option (SCO)

For more information, see the list of Product Guides in the KVM Switches and Consoles category:
<http://lenovopress.com/servers/options/kvm>

Lenovo Financial Services

Why wait to obtain the technology you need now? No payments for 90 days and predictable, low monthly payments make it easy to budget for your Lenovo solution.

- **Flexible**

Our in-depth knowledge of the products, services and various market segments allows us to offer greater flexibility in structures, documentation and end of lease options.

- **100% Solution Financing**

Financing your entire solution including hardware, software, and services, ensures more predictability in your project planning with fixed, manageable payments and low monthly payments.

- **Device as a Service (DaaS)**

Leverage latest technology to advance your business. Customized solutions aligned to your needs. Flexibility to add equipment to support growth. Protect your technology with Lenovo's Premier Support service.

- **24/7 Asset management**

Manage your financed solutions with electronic access to your lease documents, payment histories, invoices and asset information.

- **Fair Market Value (FMV) and \$1 Purchase Option Leases**

Maximize your purchasing power with our lowest cost option. An FMV lease offers lower monthly payments than loans or lease-to-own financing. Think of an FMV lease as a rental. You have the flexibility at the end of the lease term to return the equipment, continue leasing it, or purchase it for the fair market value. In a \$1 Out Purchase Option lease, you own the equipment. It is a good option when you are confident you will use the equipment for an extended period beyond the finance term. Both lease types have merits depending on your needs. We can help you determine which option will best meet your technological and budgetary goals.

Ask your Lenovo Financial Services representative about this promotion and how to submit a credit application. For the majority of credit applicants, we have enough information to deliver an instant decision and send a notification within minutes.

Seller training courses

The following sales training courses are offered for employees and partners (login required). Courses are listed in date order.

1. **Partner Technical Webinar - ISG Portfolio Update**

2024-04-15 | 60 minutes | Employees and Partners

In this 60-minute replay, Mark Bica, NA ISG Server Product Manager reviewed the Lenovo ISG portfolio. He covered new editions such as the SR680a \ SR685a, dense servers, and options that are strategic for any workload.

Tags: ThinkSystem

Published: 2024-04-15

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: 041224

2. **VTT Cloud Architecture: NVIDIA Using Cloud for GPUs and AI**

2024-05-22 | 60 minutes | Employees Only

Join JD Dupont, NVIDIA Head of Americas Sales, Lenovo partnership and Veer Mehta, NVIDIA Solution Architect on an interactive discussion about cloud to edge, designing cloud Solutions with NVIDIA GPUs and minimizing private\hybrid cloud OPEX with GPUs. Discover how you can use what is done at big public cloud providers for your customers. We will also walk through use cases and see a demo you can use to help your customers.

Tags: Artificial Intelligence (AI), Cloud, Nvidia, Software Defined Infrastructure (SDI), Technical Sales

Published: 2024-05-22

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Course code: DVCLD212

3. **Lenovo Data Center Product Portfolio**

2024-05-29 | 20 minutes | Employees and Partners

This course introduces the Lenovo data center portfolio, and covers servers, storage, storage networking, and software-defined infrastructure products. After completing this course about Lenovo data center products, you will be able to identify product types within each data center family, describe Lenovo innovations that this product family or category uses, and recognize when a specific product should be selected.

Tags: Advanced DataCenter, DataCenter Products, ThinkAgile, ThinkEdge, ThinkSystem

Published: 2024-05-29

Length: 20 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: SXXW1110r7

4. **SAP Webinar for Lenovo Sellers: Lenovo Portfolio Update for SAP Landscapes**

2024-06-04 | 60 minutes | Employees Only

Join Mark Kelly, Advisory IT Architect with the Lenovo Global SAP Center of Competence as he discusses:

- Challenges in the SAP environment
- Lenovo On-premise Solutions for SAP
- Lenovo support resources for SAP solutions

Tags: SAP, ThinkAgile, ThinkEdge, ThinkSystem

Published: 2024-06-04

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Course code: DSAPF101

5. **Partner Technical Webinar - OneIQ**
2024-07-15 | 60 minutes | Employees and Partners

In this 60-minute replay, Peter Grant, Field CTO for OneIQ, reviewed and demo'd the capabilities of OneIQ including collecting data and analyzing. Additionally, Peter and the team discussed how specific partners (those with NA Channel SA coverage) will get direct access to OneIQ and other partners can get access to OneIQ via Distribution or the NA LETS team.

Tags: Technical Sales

Published: 2024-07-15

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: 071224

6. **Virtual Facilitated Session - ThinkSystem Rack and Tower Primer for ISO Client Managers**
2024-10-31 | 90 minutes | Employees Only

In this Virtual Instructor-Led Training Session, ISO Client Managers will be able to build on the knowledge gained in Module 1 (eLearning) of the ThinkSystem Rack and Tower Server Primer for ISO Client Managers curriculum.

IMPORTANT! Module 1 (eLearning) must be completed to be eligible to participate in this session. Please note that places are subject to availability. If you are selected, you will receive the invite to this session via email.

Tags: Sales, Server, ThinkSystem

Published: 2024-10-31

Length: 90 minutes

Start the training:

Employee link: Grow@Lenovo

Course code: DSRTO102

7. **Partner Technical Webinar - LenovoPress updates and LPH Demo**
2024-11-13 | 60 minutes | Employees and Partners

In this 60-minute replay, we had 3 topics. First, David Watts, Lenovo Sr Manager LenovoPress, gave an update on LenovoPress and improvements to finding Seller Training Courses (both partner and Lenovo). Next, Ryan Tuttle, Lenovo LETS Solution Architect, gave a demo of Lenovo Partner Hub (LPH) including how to find replays of Partner Webinars in LPL. Finally, Joe Murphy, Lenovo Sr Manager of LETS NA, gave a quick update on the new Stackable Warranty Options in DCSC.

Tags: Technical Sales

Published: 2024-11-13

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: 110824

8. **Partner Technical Webinar - Server Update with Mark Bica**

2024-11-26 | 60 minutes | Employees and Partners

In this 60-minute replay, Mark Bica, Lenovo Product Manager gave an update on the server portfolio. Mark presented on the new V4 Intel servers with Xeon 6 CPUs. He reviewed where the new AMD 5th Gen EPYC CPUs will be used in our servers. He followed with a review of the GPU dense servers including SR680, SR680a, SR575 and SR780a. Mark concluded with a review of the SC777 and SC750 that were introduced at TechWorld.

Tags: Server

Published: 2024-11-26

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: 112224

9. **ThinkSystem Rack and Tower Introduction for ISO Client Managers**

2024-12-10 | 20 minutes | Employees Only

In this course, you will learn about Lenovo's Data Center Portfolio, its ThinkSystem Family and the key features of the Rack and Tower servers. It will equip you with foundational knowledge which you can then expand upon by participating in the facilitated session of the curriculum.

Course Objectives:

- By the end of this course, you should be able to:
- Identify Lenovo's main data center brands.
- Describe the key components of the ThinkSystem Family servers.
- Differentiate between the Rack and Tower servers of the ThinkSystem Family.
- Understand the value Rack and Tower servers can provide to customers.

Tags: Server, ThinkSystem

Published: 2024-12-10

Length: 20 minutes

Start the training:

Employee link: Grow@Lenovo

Course code: DSRT0101r2

10. **Q4 Solutions Launch ThinkSystem SR630 V4, SR650 V4, SR650a V4 Update Quick Hit**
2025-02-12 | 5 minutes | Employees Only

This Quick Hit covers 3 new Lenovo servers – the ThinkSystem SR630 V4, SR650 V4, and SR650a V4 - designed to drive today's workloads and elevate data centers of any size to AI-enabled powerhouses. With designed-in and proven reliability, ThinkSystem V4 servers with Intel® Xeon 6 processors deliver a secure, AI-ready, scalable data center building block. Your customers will enjoy efficient, high-performing AI and other compute-intensive app execution with any one of these servers.

Tags: Cloud, Server, Storage, ThinkSystem, XClarity

Published: 2025-02-12

Length: 5 minutes

Start the training:

Employee link: [Grow@Lenovo](#)

Course code: SXXW1204r14a

11. **Family Portfolio: Storage Controller Options**
2025-03-03 | 25 minutes | Employees and Partners

This course covers the storage controller options available for use in Lenovo servers. The classes of storage controller are discussed, along with a discussion of where they are used, and which to choose.

After completing this course, you will be able to:

- Describe the classes of storage controllers
- Discuss where each controller class is used
- Describe the available options in each controller class

Tags: Sales, Storage

Published: 2025-03-03

Length: 25 minutes

Start the training:

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: SXXW1111r2

12. **Lenovo VTT Cloud Architecture: Intel Xeon 6: Performance and Efficiency**

2025-03-05 | 60 minutes | Employees Only

Intel Xeon 6 processors introduce a robust computing platform that excels at both performance and efficiency, crucial for meeting the evolving demands of modern data centers. Addressing the broadest array of uses and workloads, from compute-intensive HPC & AI to traditional enterprise apps to scalable cloud-native applications, Intel Xeon 6 provides versatility for diverse operational and workload requirements.

Please join our guest speakers, Bhanu Jaiswal, Intel Product Line Manager and Rakib Sarwar, Intel Technical Sales Manager as they discuss Intel's latest family of processors.

Tags: Artificial Intelligence (AI), Server, Technical Sales, ThinkAgile, ThinkSystem

Published: 2025-03-05

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Course code: DVCLD220

13. **Partner Technical Webinar - Intel Product Update and How to Co-solution**

2025-03-13 | 60 minutes | Employees and Partners

In this 60-minute replay, Mark Bica, NA ISG Server Product Manager, shares the latest updates to the server portfolio. Following Mark's presentation, Brendan McDermott, Sr. Sales Engineer, and Wayne Pecht, Channel Technical Strategist, demonstrated how to use Mark's product updates to co-solution with Lenovo.

Tags: DataCenter Products

Published: 2025-03-13

Length: 60 minutes

Start the training:

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: 030725

14. **Partner Technical Webinar - DCSC Improvements - MAY0225**

2025-05-05 | 60 minutes | Partners Only

In this 60-minute replay, new improvements to DCSC were reviewed. Joe Allen, Lenovo NA LETS, presented the new PCI wizard and discussed RAID adapters. Ryan Tuttle, Lenovo NA LETS presented Spreadsheet import, Autocorrect and Expanded selections on by default. Joe Murphy, Lenovo NA LETS closed out with review of Error Message improvements and location of ThinkAgile MX and VX in the DCSC menus.

Tags: Technical Sales

Published: 2025-05-05

Length: 60 minutes

Start the training:

Partner link: [Lenovo Partner Learning](#)

Course code: MAY0225

Related publications and links

For more information, see these resources:

- Lenovo SR650a V4 product page:
<https://www.lenovo.com/us/en/p/servers-storage/servers/racks/thinksystem-sr650a-v4/LEN21TS0043>
- ThinkSystem SR650a V4 datasheet
<https://lenovopress.lenovo.com/datasheet/ds0195-lenovo-thinksystem-sr650a-v4>
- ThinkSystem SR650a V4 drivers and support
<http://datacentersupport.lenovo.com/products/servers/thinksystem/sr650av4/7dgd/downloads>
- Lenovo ThinkSystem SR650a V4 product publications:
<https://pubs.lenovo.com/sr650a-v4/>
 - User Guide, which includes:
 - System Configuration Guide
 - Hardware Maintenance Guide
 - Rack Installation Guides
 - Messages and Codes Reference
 - UEFI Manual for ThinkSystem Servers
- User Guides for options:
<https://serveroption.lenovo.com>
- ServerProven hardware compatibility:
<http://serverproven.lenovo.com>

Related product families

Product families related to this document are the following:

- [2-Socket Rack Servers](#)
- [ThinkSystem SR650a V4 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.

Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2025. All rights reserved.

This document, LP2128, was created or updated on April 29, 2025.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP2128>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP2128>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®
AnyBay®
Neptune®
ServerProven®
System x®
ThinkAgile®
ThinkShield®
ThinkSystem®
XClarity®

The following terms are trademarks of other companies:

AMD is a trademark of Advanced Micro Devices, Inc.

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, ActiveX®, Excel®, Hyper-V®, PowerShell®, SharePoint®, Windows PowerShell®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

IBM®, IBM Security®, Power®, Resilient®, and Think® are trademarks of IBM in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.